

# TONGFA

## 泰州市同发汽车配件有限公司

Taizhou Tongfa Automobile Fitting Co.,Ltd



>> 2023.03

JIANGSU TAIZHOU



# 公司简介

## Company Introduction

泰州市同发汽车配件有限公司成立于2009年，公司位于有着“水陆要津，咽喉据郡”之称的苏中门户-泰州；公司位置水陆交通便捷，环境优雅。“专业”源自于“坚持”，‘同发’作为国内第一批从事房车配件研发与生产的企业，多年如一日的专注让我们深耕于房车行业。

公司现有260余名员工，拥有较强的生产制造能力；专业技术研发人员达20余名，不断推陈出新，把更好的产品带给我们的客户；专业的质检部门严格把关，保证产品质量。多年来，公司创建了完善的质量控制服务体系；不光通过ISO9001质量管理体系认证，还通过了E-MARK欧盟认证等多项认证。

我们秉承“客户至上，奋斗为基；质量为本，齐心共赢”的企业方针；树立“务实奋进，以人为本；开拓创新，客户为先”的企业核心价值观；将“至诚至信，合作共赢”的企业使命贯彻到底；“匠心成就您的美好生活”是我们一直以来的企业愿景。

公司目前拥有国内较为先进的完整生产线，专业从事房车配件的设计、研发和生产制造；公司产品涵盖房车门、房车窗、房车储物门、房车舱储物门、房车天窗、房车踏步、房车小餐桌、房车通风换气扇、房车淋浴门、皮卡车车窗、特种车辆车窗等；公司目前与国内外多家公司达成友好合作关系，其中包括澳大利亚、韩国、日本、美国、法国、德国、英国、土耳其等多个国家和地区。公司目前拥有多项相关行业专利，专业和服务赢得了很多国内外客户的认可与支持。

我司丰富的经验以及良好的产品质量收到了各界客户的广泛认可。

我公司愿与国内外各界同仁竭诚合作，共创未来!

我们竭诚欢迎各界人士来厂参观洽谈!

---

Taizhou Tongfa Automobile Fitting Co.,Ltd. was established in 2009, the company is located in Taizhou, the gateway of central Jiangsu Province, which is known as "the key to land and water, the throat of the county"; the location of the company has convenient land and water transportation and elegant environment.

The company has more than 260 employees, with strong manufacturing capacity; Technical Product developer & Engineer of more than 20, constantly pushing out new ideas to bring better products to our customers; professional quality control department strictly to ensure product quality.

We are adhering to the enterprise policy of "customer first, struggle-based; quality-oriented, win-win"; establishing the enterprise core values of "pragmatic and progressive, people-oriented; pioneering and innovative, customer first"; the enterprise mission of "sincerity and trust, win-win cooperation". The mission of "Sincerity, Cooperation and Win-win" is carried out to the end; "Craftsmanship to achieve your high quality life" is our corporate vision all along.

The company currently has a more advanced and complete production line, specializing in the design, development and manufacture of RV accessories; our products include RV doors, RV windows, RV storage doors, RV cabin storage doors, RV skylights, RV steps, RV small dining tables, RV ventilation fans, RV shower doors, pickup truck windows, special vehicle windows, etc.; We has established good business relationships with many partners, including Australia, Korea, Japan, the United States, France, Germany, the United Kingdom, Turkey and other countries and regions. etc.Our rich experience and good quality of products have been widely recognized by customers from all walks of life.

We will provide good communication and willing to establish a long-term cooperative relationship with you.

Our goal is to create a better future altogether. We sincerely welcome (you) people from all around the world to visit our factory.



泰州市同发汽车配件有限公司  
Taizhou Tongfa Automobile Fitting Co.,Ltd.

# 目录

## Contents

### 房车门系列/RV Door Series

SLD单点锁房车门	SLD Single point lock RV Door	01
ELD刷卡锁房车门	ELD electronic card lock RV Door	03
DLD房车门	DLD RV Door	05
TLD三联房车门	TLD Three point linkage lock RV Door	07
SLD水滴门	Teardrop RV Door	09
SLD拖挂式房车门	Trailer Door	11
ELD单点刷卡锁门	Single point electronic card lock RV Door	13
ELD单点密码锁门	Single point password lock RV Door	15

### 房车窗系列/RV Window Series

SW固定窗	SW Fixed window	17
SW推拉窗	SW Sliding window	19
SW双层推拉窗	SW Double Sliding window	21
HW双层外推窗 (圆角)	HW Double Tophung Hinged window (rounded corners)	23
HW双层外推窗 (方角)	HW Double Tophung Hinged window (right angle)	25
HW外推窗 (圆角单层钢化)	HW Tophung Hinged window (rounded corner single Toughened glass)	27
SW推拉窗 (单侧内置纱窗)	Sliding window (one side built-in screen window)	29
SW提升窗	RV Vertical Sliding window	31
VENT排气扇	VENT exhaust fan	33
HW弧形外推窗	RV Arc Tophung Hinged window	35
SK房车天窗	RV Skylight	37
SK房车天窗 (遥控灯光)	RV Skylight (remote control light)	39
SK前额天窗	RV Curved Skylight	41
SK星空窗	Starry sky window	43
SK帐篷天窗	Tent skylight	45

### 踏步系列/RV Step Series

MS-F手动 单层(S)折叠踏步	MS-F manual folding Single step	47
MS-F手动 双层(D)折叠踏步	MS-F manual folding Double step	49
MS-F电动 折叠踏步(E)	MS-F Electric folding RV step	51

### 储物门、舱储门系列/Storage door、warehousing door series

HD储物门	HD Storage door	53
BD房车舱储门	BD Rv warehousing door	55

# 目 录

## Contents

### 皮卡车窗系列/Pickup truck window series

SW皮卡前推拉窗	Pickup sliding window	57
SW皮卡后推拉窗	Pickup sliding window	59
HW皮卡大外推窗	Pickup Tophung Hinged window	61
HW皮卡侧外推窗	Pickup Tophung Hinged window	63

### 无框房车窗系列/Frameless RV window series

HW无框房车窗	Frameless RV window	65
---------	---------------------	----

### 配件系列/Accessories series

RV房车餐桌	RV Table	67
RV房车淋浴门	RV Shower Door	69
RV铝板 (RV车外身装饰铝板)	Aluminum plate (Aluminum body decoration)	71
RV导雨槽	Guide the rain trough	71
RV房车爬梯	RV ladder	73
RV铝封边条	Aluminum Article sealing side	73

### 特殊房车门系列/Arc RV door series

弧形房车RV门	Arc RV door	75
房车RV对开门	RV Double-doors	77

### 房车进水口舱盖系列/RV water inlet hatch cover series

RV进水口舱盖	RV water inlet hatch	79
---------	----------------------	----

### 特种车辆系列/Special vehicle series

军用方舱门窗WD	Military shelter doors and windows	81
运马车门窗WD	Horse trailer doors and windows	83
SV特种车辆车窗	Special vehicle windows	85



# SLD单点锁房门



高强度铝合金型材  
粉末喷涂




高强度铝网  
高强度玻璃纤维纱帘



安全认证单点锁



磨砂钢化玻璃  
抗紫外线亚克力板

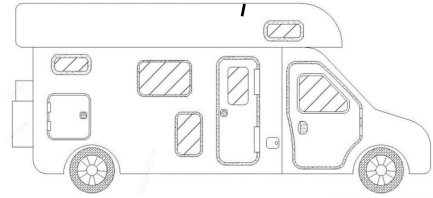

适用于拖挂式房车和自行式房车

## 产品特点及主要功能

**门框：**高强度铝合金型材，粉末喷涂。常规色为黑色、白色，也可以根据客户要求定制银灰色等。

**门板：**白色抗紫外线复合夹芯板（其他颜色可定制）。

**玻璃：**磨砂钢化玻璃或抗紫外线亚克力玻璃可供选择。

**铝网：**高强度铝网。

**纱帘：**高强度玻璃纤维纱帘。

**门锁：**安全认证单点锁。

**结构：**结构独特，外门和纱门既可合在一起，又可分开。该门具有开、关、锁、通风、透光、防蚊虫、隔音、隔热和良好的防水性能。结构轻巧，安装使用简便，牢固耐用，型号多样。

**可选项：**详见规格说明。


**可选项：**门吸。

（可选项须单独订购）

## 主要用途

拖挂式房车和自行式房车,适合墙厚30~60mm。

## 安装示意图

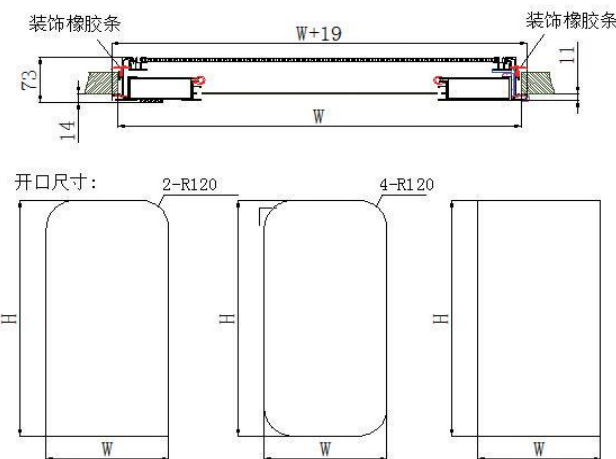

门吸（可选项）

## 规格参数

规格型号 W-H	外形尺寸/mm (W+19)-(H+19)	开口尺寸/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

规格可根据用户要求协商定制。

W：门安装面的宽，单位mm；

H：门安装面的高，单位mm。

## 规格说明

2R L 黑色

SLD-W-H-4R -- 白色

4S R 银灰色（定制）

SLD: 此款门代号

2R: 2圆角门

4R: 4圆角门

4S: 方角门

L: 合页在左侧的门

R: 合页在右侧的门

黑/白/银灰: 门框的颜色。

配件: 装饰橡胶条。

可选项: 门吸。（可选项须单独订购）



# SLD Single point lock RV Door



High-quality aluminum alloy profile powder coating




High-quality aluminum mesh  
High-quality Fiberglass sheer



safety certified single point lock



Frosted tempered glass  
UV - resistant acrylic

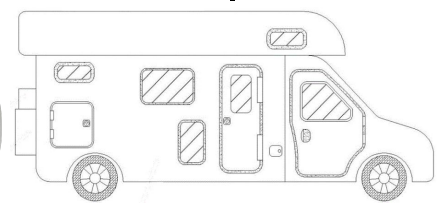

Trailer RV and self-propelled RV

## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Door panel:** white anti-ultraviolet composite sandwich panel (other colors can be customized).

**Glass:** Frosted tempered glass

UV - resistant acrylic glass. (Optional)

**Aluminum mesh:** High-quality aluminum mesh.

**Gauze curtain:** High-quality Fiberglass sheer.

**Door lock:** safety certified single point lock.

**Structure:** The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.


**Optional:** see specification for details.

**Optional parts:** Door Stop. (Optional items must be ordered separately)


## Main applications

Trailer RV and self-propelled RV, suitable for wall thickness of 30~60mm.

## Installation diagram

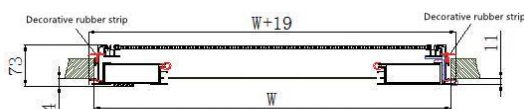

Opening size:

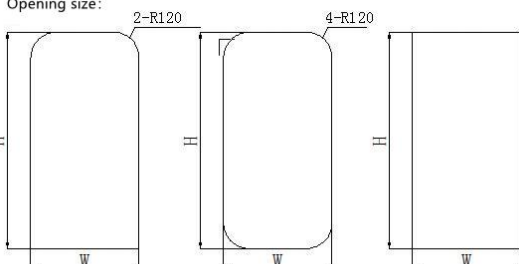

Door stop

## Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

## Specification

2R L Black

SLD-W-H- 4R - - White

4S R Silver gray ( custom )

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : Color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door stop

(Optional items must be ordered separately)



# ELD刷卡锁房车门



## 产品特点及主要功能

**门框：**高强度铝合金型材，粉末喷涂。  
常规色为 黑色、白色，也可以  
根据客户要求定制银灰色等。

**门板：**白色抗紫外线复合夹芯板  
(其他颜色 可定制)。

**玻璃：**磨砂钢化玻璃或抗紫外线亚克力玻璃可供选择。

**铝网：**高强度铝网。

**纱帘：**高强度玻璃纤维纱帘。

**门锁：**安全认证电子刷卡锁，可酒店式总台管理。

**结构：**结构独特，外门和纱门既可合在一起，又可分  
开。该门具有开、关、锁、通风、透光、防蚊  
虫、隔音、隔热和良好的防水性能。结构轻巧  
，安装使用简便，牢固耐用，型号多样。


**可选项：**详见规格说明。

**可选件：**门吸。(可选件须单独订购)

## 主要用途

营地型拖挂式房车专用，适合墙厚30-60mm。

## 安装示意图

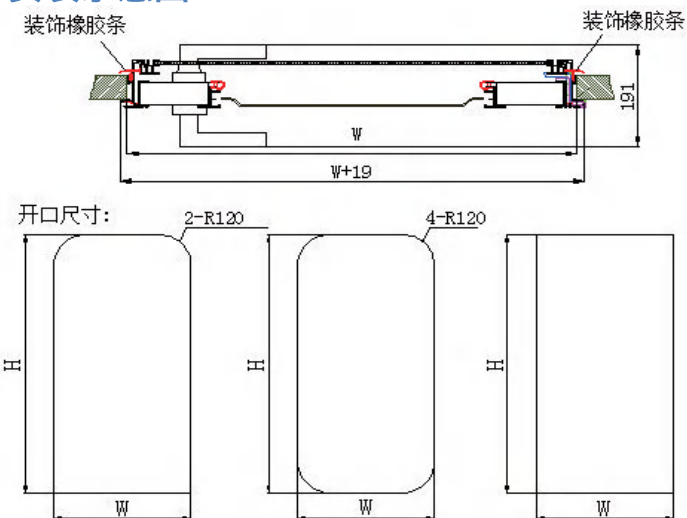

## 规格参数

规格型号 W-H	外形尺寸/mm (W+19)-(H+19)	开口尺寸/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

规格可根据用户要求协商定制。

W：门安装面的宽，单位mm；  
H：门安装面的高，单位mm。

## 规格说明

2R L 黑色  
ELD-W-H-4R - - 白色  
4S R 银灰色(定制)

ELD: 此款门代号

2R: 2圆角门

4R: 4圆角门

4S: 方角门

L: 合页在左侧的门

R: 合页在右侧的门

黑/白/银灰: 门框的颜色。

配件: 装饰橡胶条。

可选件: 门吸。(可选件须单独订购)



门吸




# ELD electronic card lock RV Door




High-quality aluminum alloy profile powder coating




High-quality aluminum mesh High-quality Fiberglass sheer

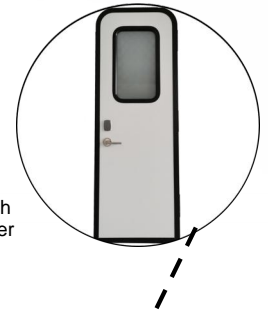

security certification electronic card lock



Frosted tempered glass UV - resistant acrylic



Camp type trailer RV special

## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Door panel:** White anti-ultraviolet composite sandwich panel (other colors can be customized).

**Glass:** Frosted tempered glass

UV - resistant acrylic glass. (Optional)

**Aluminum mesh:** High-quality aluminum mesh.

**Gauze curtain:** High-quality Fiberglass sheer.

**Door lock:** security certification electronic card lock, hotel type management.

**Structure:** The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

**Optional:** see specification for details.

**Optional parts:** Door Stop. (Optional items must be ordered separately)

## Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.



W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

## Main applications

Camp type trailer RV special, suitable for wall thickness of 30~60mm.

## Installation diagram

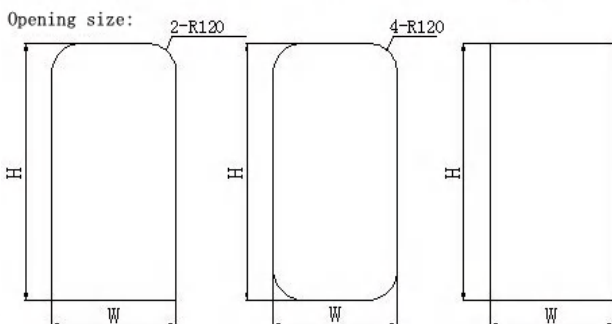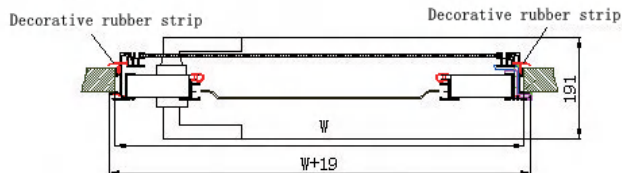

## Specification

2R L Black

ELD-W-H- 4R - - White

4S R Silver gray ( custom )

ELD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door


R : The hinge is on the right side of the door

Black/White/Silver gray : color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop.

(Optional items must be ordered separately)



Door stop





# DLD房车门

## 产品特点及主要功能

- 门框：**高强度铝合金型材，粉末喷涂。  
常规色为 黑色、白色，  
也可以根据客户要求定制银灰色等。
- 门板：**白色抗紫外线复合夹芯板  
(其他颜色 可定制)。
- 玻璃：**汽车级黑色隐私安全玻璃  
(通过3C安全认证)。
- 纱门：**黑色百褶纱门。
- 门锁：**进口双点锁。
- 结构：**该门带有垃圾桶、拉手，具有开、关、锁、通风、透光、防蚊虫、隔音、隔热和良好的防水性能。结构轻巧，安装使用简便，牢固耐用。

**可选项：**详见规格说明。

**可选件：**门吸。(可选件须单独订购)

## 主要用途

拖挂式房车和自行式房车,适合墙厚30-90mm。

## 规格说明

DLD-W-H-4R - R - 黑色  
白色  
银灰色(定制)

DLD: 此款门代号


4R: 4圆角门

R: 合页在右侧的门

黑/白/银灰: 门框的颜色。

配件: 装饰橡胶条。

可选件: 门吸。(可选件须单独订购)

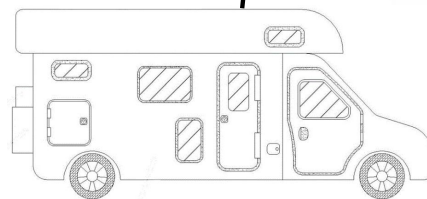

适用于拖挂式房车和自行式房车



高强度铝合金型材  
粉末喷涂



汽车级黑色隐私安全玻璃  
(通过3C安全证)



自带垃圾桶



进口双点锁



门吸

## 规格参数


规格型号 W-H	外形尺寸/mm (W+26)-(H+26)	开口尺寸/mm (W)-(H)
600-1810	626-1836	600-1810

规格可根据用户要求协商定制。

W: 门安装面的宽, 单位mm;


H: 门安装面的高, 单位mm。

## 安装示意图

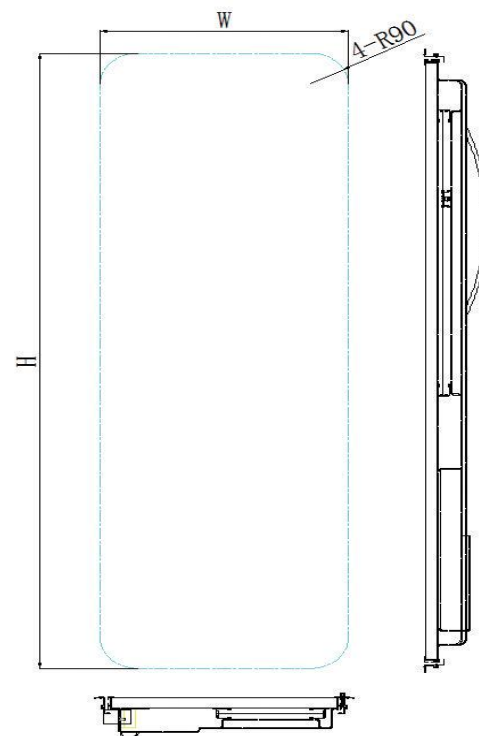



# DLD RV Door

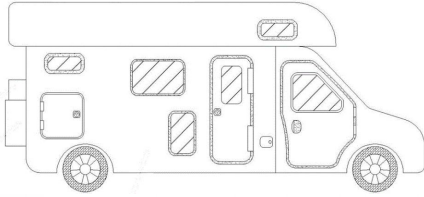

Trailer and self-propelled RV

## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Custom colors:** silver grey, etc.

**Door panel:** White anti-ultraviolet composite sandwich panel (other colors can be customized).

**Glass:** Automotive grade black privacy safety glass (3C certified).

**Screen door:** Black Folding screen door.

**Door lock:** Imported double point lock.

**Structure:** The door with garbage can, handle, with open, close, lock, ventilation, light, insect prevention, sound insulation, heat insulation and good waterproof performance. The structure is light, easy to install and use, firm and durable.

**Optional:** see specification for details.

**Optional parts:** Door Stop. (Optional items must be ordered separately)

## Main applications

Trailer and self-propelled RV, suitable for wall thickness of 30-90mm



High-quality aluminum alloy profile powder coating



Automotive grade black privacy safety glass (3C certified).



trash bin



Double point lock

## Specification parameters


Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
600-1810	626-1836	600-1810

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

## Installation diagram

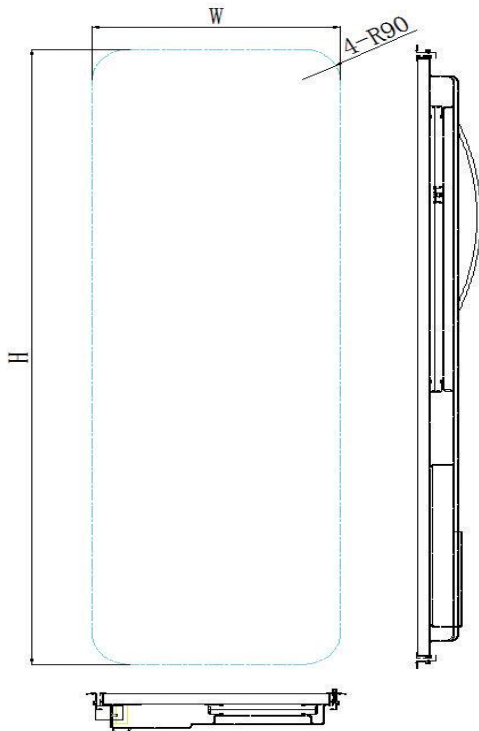

## Specification

**Black**

**DLD-W-H- 4R -R- White**

**Silver gray ( custom )**

**DLD:** Specifications and models of doors

**4R :** Door with four rounded corners

**R :** The hinge is on the right side of the door

**Black/White/Silver gray :** color of door frame

**Accessories :** Decorative rubber strip.

**Optional parts :** Door Stop.

(Optional items must be ordered separately)



Door stop







# TLD Three point linkage lock RV Door



Trailer and self-propelled RV

## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Door panel:** White anti-ultraviolet composite sandwich panel (other colors can be customized).

**Glass:** Uv - resistant acrylic glass.

**Aluminum mesh:** High-quality aluminum mesh  
304 stainless steel diamond mesh.  
(Optional)

**Gauze curtain:** High-quality Fiberglass sheer.

**Air vent:** Plastic labyrinth air vent is both ventilated and dustproof

**Door lock:** Unique three-point linkage lock.

**Structure:** The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

**Optional:** see specification for details.

**Optional parts:** Door Stop.

(Optional items must be ordered separately)

## Main applications

Trailer and self-propelled RV. Suitable for wall thickness of 30mm - 40mm



High-quality aluminum alloy profile powder coating



High-quality aluminum mesh  
304 stainless steel diamond mesh  
High-quality Fiberglass sheer



Three point linkage lock



UV - resistant acrylic

## Specification parameters



Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
625-1750	644-1769	625-1750
630-1630	649-1649	630-1630
630-1435	649-1454	630-1435

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

## Installation diagram

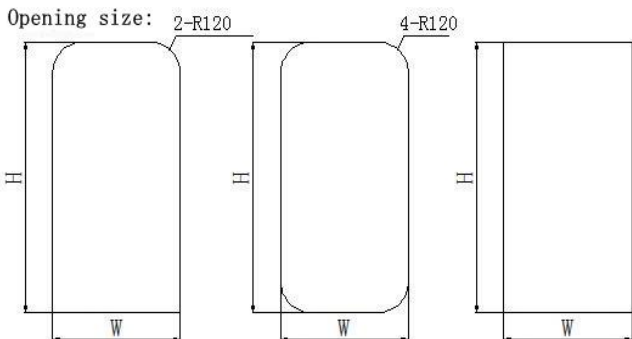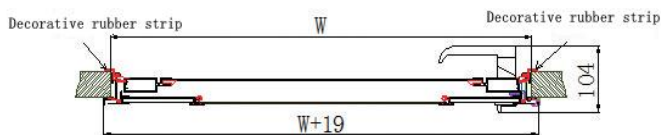

Door Stop:



## Specification

2R L Black

TLD-W-H- 4R - - White

4S R Silver gray ( custom )

TLD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : Color of door frame

Air vents should be specified

Accessories : Decorative rubber strip.

Optional parts : Door Stop.


(Optional items must be ordered separately)



# 水滴门



泰州市同发汽车配件有限公司  
Taizhou Tongfa Automobile Fitting Co., Ltd

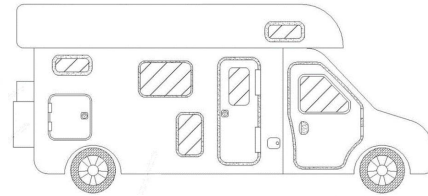

适用于拖挂式房车和自行式房车



高强度铝合金型材  
粉末喷涂



高强度铝网  
高强度玻璃纤维纱帘



安全认证单点锁



磨砂钢化玻璃  
抗紫外线亚克力板

## 产品特点及主要功能

**门框：**高强度铝合金型材，粉末喷涂。  
常规色为黑色、白色，

也可以根据客户要求定制银灰色等。

**门板：**白色抗紫外线复合夹芯板  
(其他颜色可定制)。

**玻璃：**磨砂钢化玻璃或抗紫外线亚克力玻璃  
可供选择。

**铝网：**高强度铝网。

**纱帘：**高强度玻璃纤维纱帘。

**门锁：**安全认证单点锁。

**结构：**结构独特，外门和纱门既可合在一起，  
又可分开。该门具有开、关、锁、通风、  
透光、防蚊虫、隔音、隔热和良好的防水性能。  
结构轻巧，安装使用简便，牢固耐用，型号多样。


**可选项：**详见规格说明。

**可选项：**门吸。(可选项须单独订购)


## 主要用途

拖挂式房车和自走式房车,适合墙厚30~60mm。

## 安装示意图

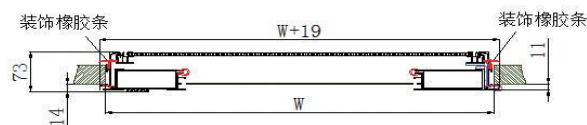

开口尺寸：

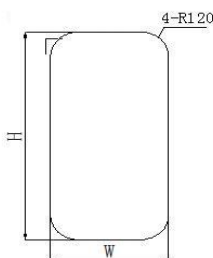

## 规格参数

规格型号 W-H	外形尺寸/mm (W+19)-(H+19)	开口尺寸/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

规格可根据用户要求协商定制。

W：门安装面的宽，单位mm；

H：门安装面的高，单位mm。

## 规格说明

门吸：

L 黑色  
SLD-W-H-4R -- 白色  
R 银灰色(定制)

SLD: 此款门代号

4R: 4圆角门

L: 合页在左侧的门

R: 合页在右侧的门

黑/白/银灰: 门框的颜色。


配件: 装饰橡胶条。

可选项: 门吸。(可选项须单独订购)





# Teardrop RV Door

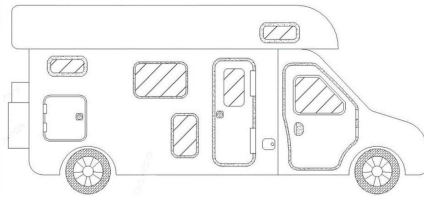

Trailer and self-propelled RV



High-quality aluminum alloy profile powder coating



High-quality aluminum mesh  
High-quality Fiberglass sheer



safety certified single point lock



Frosted tempered glass  
UV - resistant acrylic



## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Door panel:** White anti-ultraviolet composite sandwich panel (other colors can be customized).

**Glass:** Frosted tempered glass

UV - resistant acrylic glass. (Optional)

**Aluminum mesh:** High-quality aluminum mesh.

**Gauze curtain:** High-quality Fiberglass sheer.

**Door lock:** safety certified single point lock.

**Structure:** The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.


**Optional:** see specification for details.

**Optional parts:** Door Stop. (Optional items must be ordered separately)


## Main applications

Trailer RV and self-propelled RV, suitable for wall thickness of 30~60mm.

## Installation diagram

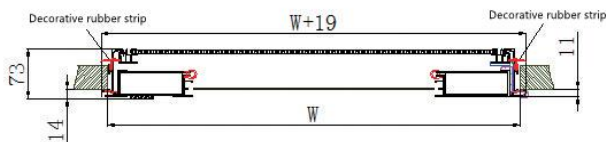

Opening size:

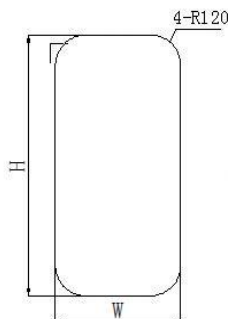

## Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

## Specification

L Black

SLD-W-H- 4R - - White

R Silver gray ( custom )

SLD: Specifications and models of doors

4R : A door with four rounded corners

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : Color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door stop



(Optional items must be ordered separately)

Door stop:





# 拖挂式房车门

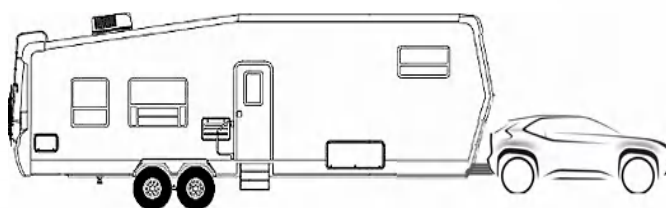

拖挂式房车



磨砂钢化玻璃  
抗紫外线亚克力板  
钢化玻璃提升窗



高强度铝网  
高强度玻璃纤维纱帘



高强度铝合金型材  
粉末喷涂



安全认证单点锁

## 产品特点及主要功能

**门框：**高强度铝合金型材，粉末喷涂。  
常规色为黑色、白色，

也可以根据客户要求定制银灰色等。

**门板：**白色抗紫外线复合夹芯板  
(其他颜色可定制)。

**玻璃：**磨砂钢化玻璃或抗紫外线亚克力玻璃(固定窗)  
钢化玻璃(提升窗)，可供选择。

**铝网：**高强度铝网。

**纱帘：**高强度玻璃纤维纱帘。

**门锁：**安全认证单点锁。

**结构：**结构独特，外门和纱门既可合在一起，  
又可分开。该门具有开、关、锁、通风、  
透光、防蚊虫、隔音、隔热和良好的防水性能。  
结构轻巧，安装使用简便，牢固耐用，型号多样。


**可选项：**详见规格说明。

**可选项：**门吸。(可选项须单独订购)

## 主要用途

拖挂式房车,适合墙厚30~60mm。

## 安装示意图

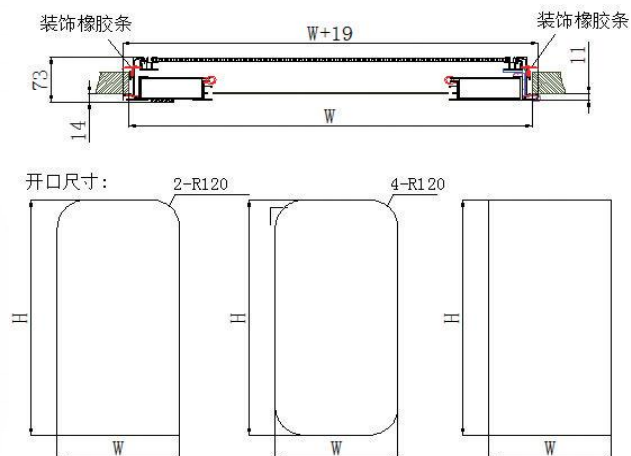

## 规格参数

规格型号 W-H	外形尺寸/mm (W+19)-(H+19)	开口尺寸/mm (W)-(H)
650-900	669-919	650-900

规格可根据用户要求协商定制。

W：门安装面的宽，单位mm；

H：门安装面的高，单位mm。

## 规格说明

2R L 黑色

SLD-W-H-4R -- 白色

4S R 银灰色(定制)

SLD: 此款门代号

2R: 2圆角门

4R: 4圆角门

4S: 方角门

L: 合页在左侧的门

R: 合页在右侧的门

黑/白/银灰: 门框的颜色。

配件: 装饰橡胶条。

可选项: 门吸。(可选项须单独订购)

钢化玻璃(提升窗): 门吸:





# Trailer Door



trailer RV special



High-quality aluminum alloy profile powder coating

High-quality aluminum mesh High-quality Fiberglass sheer

safety certified single point lock

Frosted tempered glass UV - resistant acrylic Toughened glass lifting window



## Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
650-900	669-919	650-900

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

## Specification

2R L Black

SLD-W-H- 4R - - White

4S R Silver gray ( custom )

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : Color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door stop

(Optional items must be ordered separately)

Toughened glass lifting window :

Door stop :



## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Door panel:** White anti-ultraviolet composite sandwich panel (other colors can be customized).

**Glass:** Frosted tempered glass

UV - resistant acrylic glass.

Toughened glass lifting window(Optional)

**Aluminum mesh:** High-quality aluminum mesh.

**Gauze curtain:** High-quality Fiberglass sheer.

**Door lock:** safety certified single point lock.

**Structure:** The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.


**Optional:** see specification for details.

**Optional parts:** Door Stop.(Optional items must be ordered separately)


## Main applications

Trailer, suitable for wall thickness of 30~60mm.

## Installation diagram

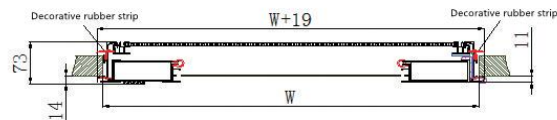

Opening size:

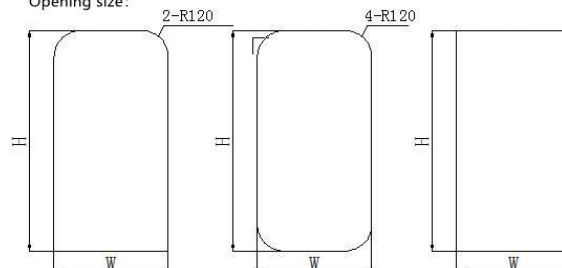





# 单点刷卡锁门

## 产品特点及主要功能

**门框：**高强度铝合金型材，粉末喷涂。

常规色为黑色、白色，  
也可以根据客户要求定制银灰色等。

**门板：**白色抗紫外线复合夹芯板  
(其他颜色可定制)。

**玻璃：**磨砂钢化玻璃或抗紫外线亚克力玻璃

**铝网：**高强度铝网。

**纱帘：**高强度玻璃纤维纱帘。

**门锁：**单点刷卡锁

**结构：**结构独特，外门和纱门既可合在一起，又可分开。该门具有开、关、锁、通风、透光、防蚊虫、隔音、隔热和良好的防水性能。结构轻巧，安装使用简便，牢固耐用，型号多样。


**可选项：**详见规格说明。

**可选项：**门吸。(可选项须单独订购)

## 主要用途

营地型拖挂式房车专用，适合墙厚30-60mm。

## 安装示意图

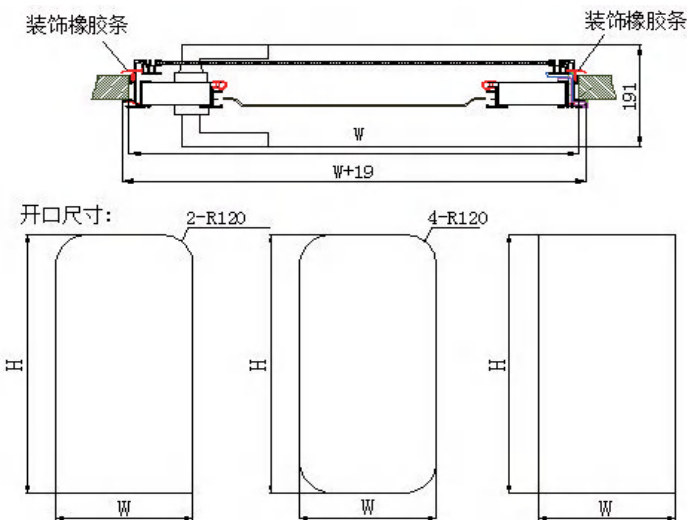

## 规格参数

规格型号 W-H	外形尺寸/mm (W+19)-(H+19)	开口尺寸/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

规格可根据用户要求协商定制。

W：门安装面的宽，单位mm；

H：门安装面的高，单位mm。

## 规格说明

2R L 黑色

ELD-W-H-4R - - 白色

4S R 银灰色(定制)

ELD: 此款门代号

2R: 2圆角门

4R: 4圆角门

4S: 方角门

L: 合页在左侧的门

R: 合页在右侧的门

黑/白/银灰: 门框的颜色。

配件: 装饰橡胶条。


可选项: 门吸。(可选项须单独订购)

门吸:





# Single point electronic card lock RV Door

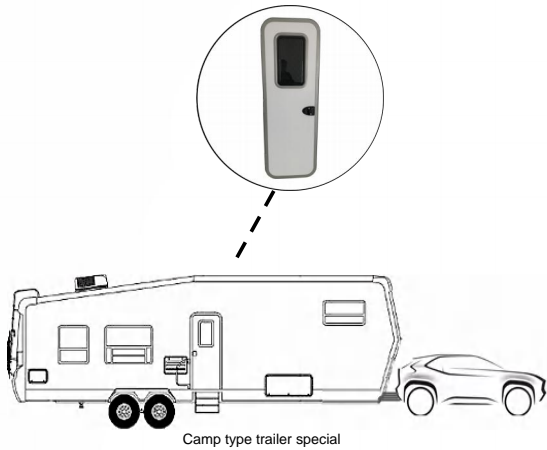

## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Door panel:** White anti-ultraviolet composite sandwich panel (other colors can be customized).

**Glass:** Frosted tempered glass

UV - resistant acrylic glass.

Toughened glass lifting window(**Optional**)

**Aluminum mesh:** High-quality aluminum mesh.

**Gauze curtain:** High-quality Fiberglass sheer.

**Door lock:** Single point electronic card lock.

**Structure:** The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

**Optional:** see specification for details.

**Optional parts:** Door Stop. (Optional items must be ordered separately)



High-quality aluminum alloy profile powder coating



High-quality aluminum mesh High-quality Fiberglass sheer



Frosted tempered glass UV - resistant acrylic



Single point electronic card lock

## Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

## Specification

2R L Black

ELD-W-H- 4R - - White

4S R Silver gray ( custom )

ELD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop.

(Optional items must be ordered separately)



Door Stop:



## Main applications

Camp type trailer special, suitable for wall thickness of 30~60mm.

## Installation diagram

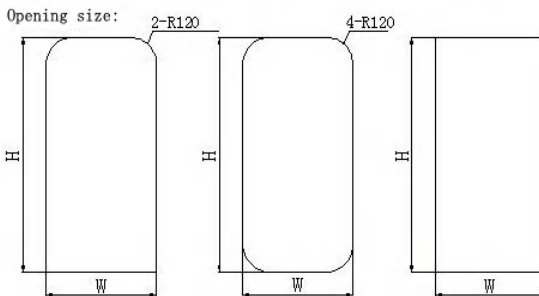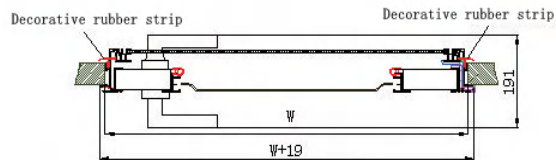



# 单点密码锁门

## 产品特点及主要功能

**门框：**高强度铝合金型材，粉末喷涂。  
常规色为黑色、白色，  
也可以根据客户要求定制银灰色等。

**门板：**白色抗紫外线复合夹芯板  
(其他颜色可定制)。

**玻璃：**丝印钢化玻璃

**铝网：**高强度铝网。

**纱帘：**折叠遮光帘。

**门锁：**单点密码锁

**结构：**结构独特，外门和纱门既可合在一起，又可分开。该门具有开、关、锁、通风、透光、防蚊虫、隔音、隔热和良好的防水性能。结构轻巧，安装使用简便，牢固耐用，型号多样。



**可选项：**详见规格说明。

**可选项：**门吸。(可选项须单独订购)


## 主要用途

营地型拖挂式房车专用，适合墙厚30-60mm。

## 安装示意图

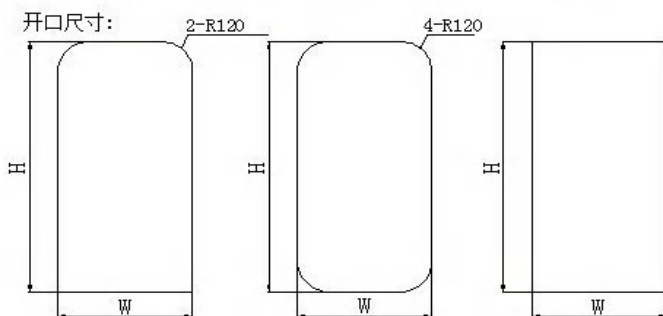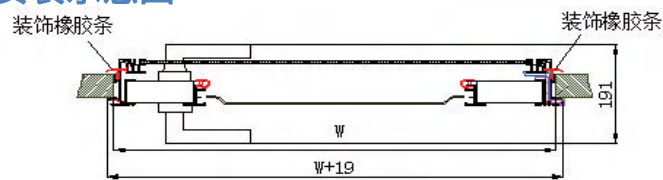

营地型拖挂式房车专用

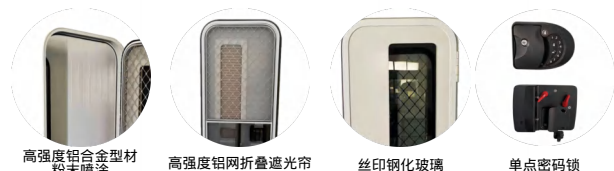

高强度铝合金型材  
粉末喷涂

高强度铝网折叠遮光帘

丝印钢化玻璃

单点密码锁

## 规格参数

规格型号 W-H	外形尺寸/mm (W+19)-(H+19)	开口尺寸/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

规格可根据用户要求协商定制。

W：门安装面的宽，单位mm；

H：门安装面的高，单位mm。

## 规格说明

2R L 黑色

ELD-W-H-4R - - 白色

4S R 银灰色(定制)

ELD: 此款门代号

2R: 2圆角门

4R: 4圆角门

4S: 方角门

L: 合页在左侧的门

R: 合页在右侧的门

黑/白/银灰: 门框的颜色。

配件: 装饰橡胶条。

可选项: 门吸。(可选项须单独订购)

门吸:





# Single point password lock RV Door

## Product Features and Main Functions




- Door frame:** High-quality aluminum alloy profile, powder coating.
- Normal colors:** black and white;
- Customized colors:** silver grey, etc.
- Door panel:** White anti-ultraviolet composite sandwich panel (other colors can be customized).
- Glass:** Screen printed tempered glass.
- Aluminum mesh:** High-quality aluminum mesh.
- Gauze curtain:** High-quality Fiberglass sheer.
- Door lock:** Single point password lock.
- Structure:** The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

**Optional:** see specification for details.


**Optional parts:** Door Stop.  
(Optional items must be ordered separately)

## Main applications

Camp type trailer special, suitable for wall thickness of 30~60mm.

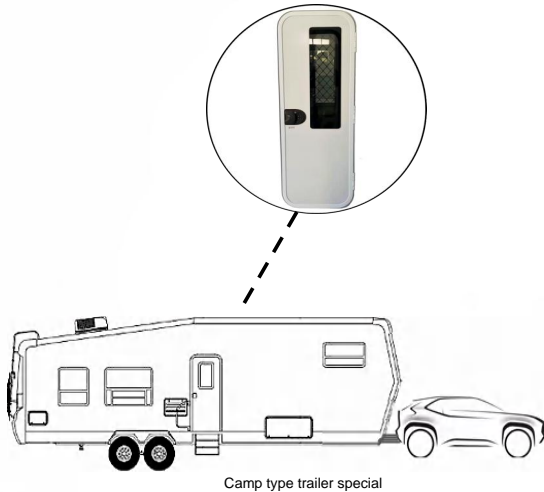

## Installation diagram

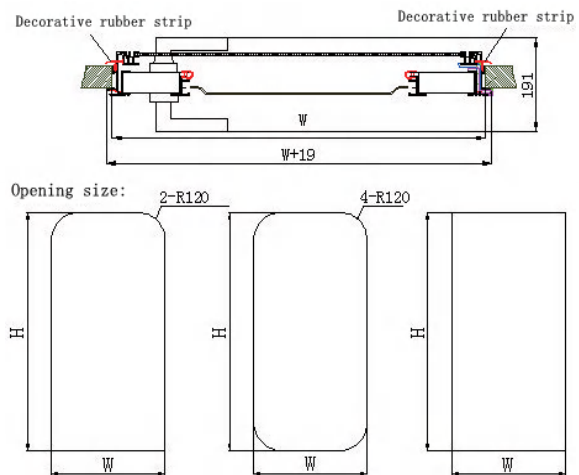

## Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

## Specification

- 2R L Black
- ELD-W-H- 4R - - White
- 4S R Silver gray ( custom )

ELD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door


Black/White/Silver gray : color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop.

(Optional items must be ordered separately)

Door Stop:





# SW固定窗



## 规格参数

规格型号 W-H	外形尺寸/mm (W+30)-(H+30)	开口尺寸/mm (W)-(H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。常规色为黑色、白色，也可以根据客户要求定制银灰色。

**玻璃：**4mm钢化玻璃（获得安全认证）或单层抗紫外线亚克力玻璃。

**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）

**开启：**固定窗，不可开启。

**主要功能：**该窗户具有透光、防蚊虫、隔音、隔热和 良好的防水性能。窗户采用自攻螺钉夹墙固定，安装使用简便，结构轻巧牢固耐用，型号多样。


**可选件：**高强度玻璃纤维纱帘和遮光帘一体化。




上推：打开高强度玻璃纤维纱帘

下拉：打开遮光帘

## 安装示意图

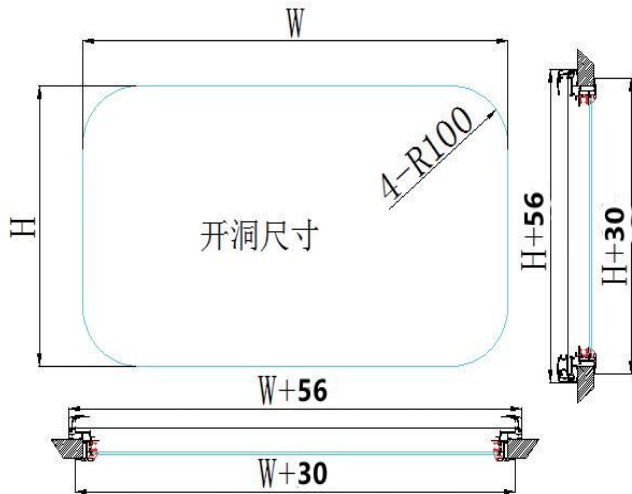

规格可根据用户要求协商定制。  
W：窗安装面的宽，单位mm；  
H：窗安装面的高，单位mm。

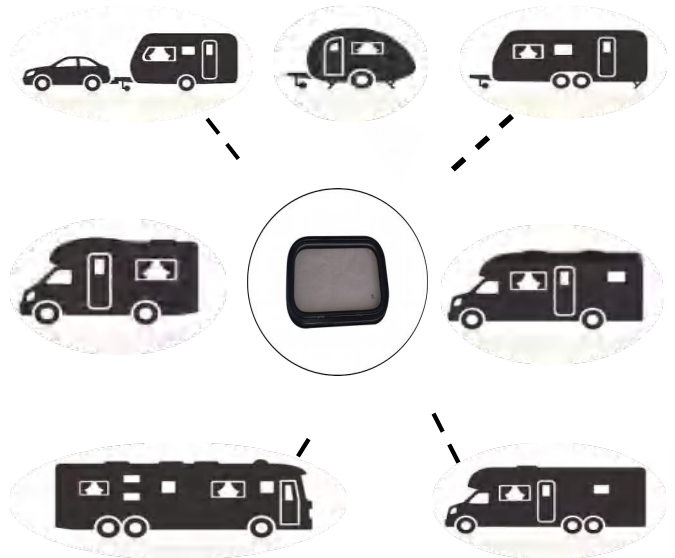

适用于各种类型的房车

## 主要用途

适用于各种类型的房车。 分别适合不同墙厚：30-90mm。



# SW Fixed window



## Specification parameters

Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W)-(H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Glass:** 4mm toughened glass (certified for safety) or single layer UV resistant acrylic glass.

**Gauze curtain:** High-quality glass fiber gauze curtain and shading curtain integration.(optional)

**Open:** Fixed window, not open.

**Main function:** The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

**Options:** Integration of high-strength glass fiber gauze curtain and shading curtain.

Specifications can be customized according to customer requirements.

**W:** Width of Window mounting surface, unit mm;



**H:** Height of the Window mounting surface, unit mm;



**Push up:** Open the high-strength glass fiber gauze curtain.

**Pull down:** Open the shade

## Installation diagram

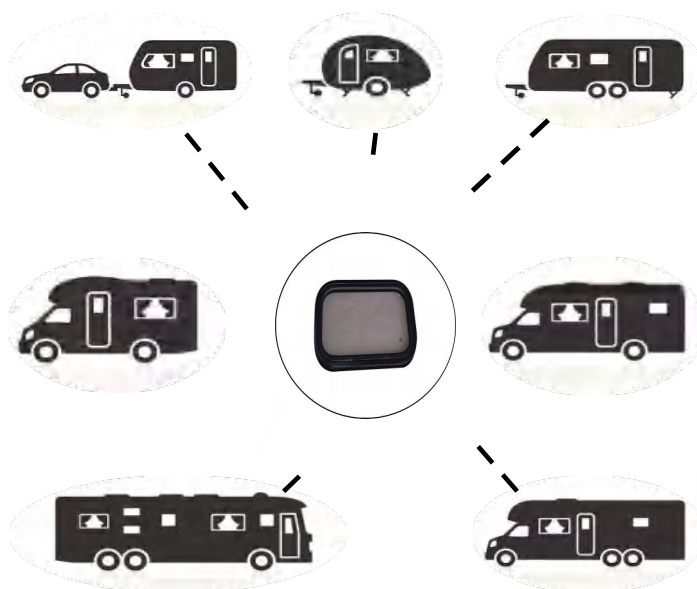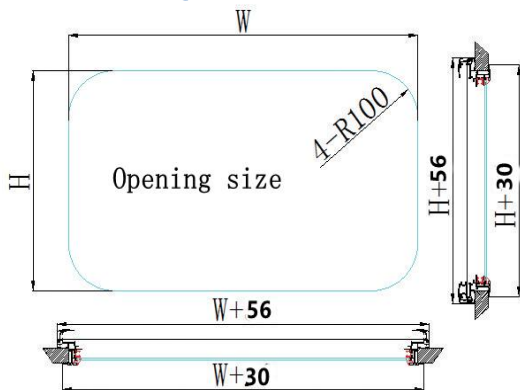

Applicable to all types of RV


## Main applications

Used in Rv .

Suitable for different wall thickness: 30-90mm



# SW推拉窗

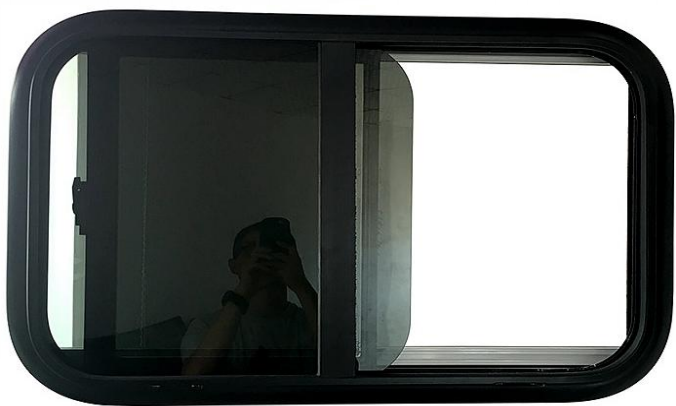

高强度铝合金型材  
粉末喷涂



4mm钢化玻璃  
单层抗紫外线亚克力玻璃



高强度玻璃纤维纱帘  
遮光帘

## 规格参数

规格型号 W-H	外形尺寸/mm (W+30)-(H+30)	开口尺寸/mm (W) - (H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

规格可根据用户要求协商定制。

W：窗安装面的宽，单位mm；

H：窗安装面的高，单位mm。

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。  
常规色为黑色、白色，  
也可以根据客户要求定制银灰色。


**玻璃：**4mm钢化玻璃（获得安全认证）  
或单层抗紫外线亚克力玻璃。

**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）

**开启：**推拉式开启，单侧玻璃可推拉。


**主要功能：**该窗户具有透光、防蚊虫、隔音、隔热和良好的防水性能。本推拉窗采用自攻螺钉夹墙固定，安装使用简便，结构轻巧牢固耐用，型号多样。

## 安装示意图

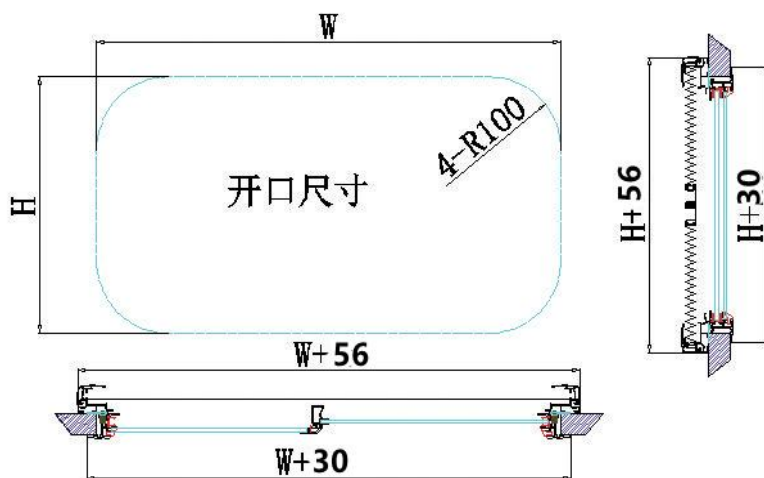

## 主要用途

适用于各种类型的房车。分别适合不同墙厚：30-90mm。

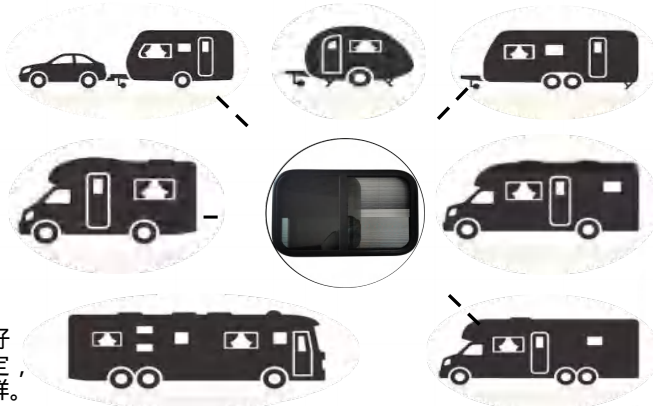

适用于各种类型的房车



# SW Sliding window



## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Glass:** 4mm toughened glass (certified for safety)

Single layer UV resistant acrylic glass. (optional)

**Gauze curtain:** High-quality glass fiber gauze curtain and Shading curtain integration. (optional)

**Open:** push-pull type open, one side glass can push pull.

**Main function:** The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.



4mm toughened glass (certified for safety)  
Single layer  
UV resistant acrylic glass

High-quality glass fiber  
Gauze curtain  
Shading curtain integration

High-quality  
Aluminum alloy profile,  
Powder coating

## Main applications

Used in Rv . Suitable for different wall thickness: 30-90mm

## Specification parameters



Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W)-(H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

## Installation diagram

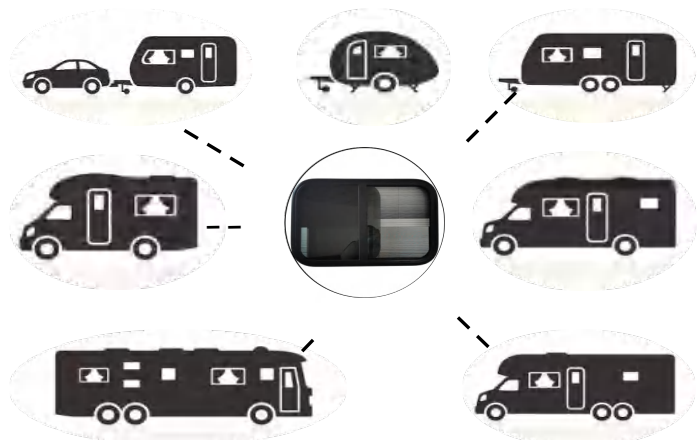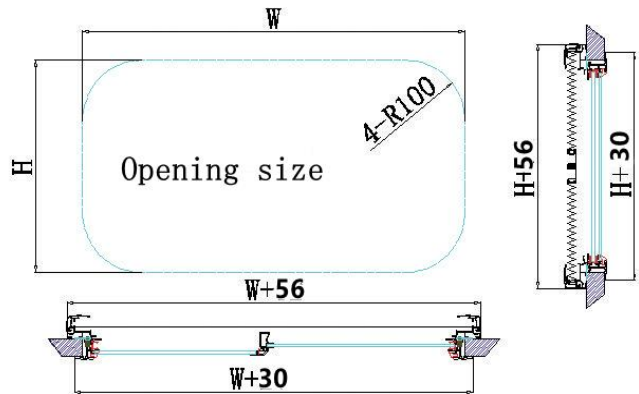

Applicable to all types of RV





# SW双层推拉窗



高强度铝合金型材  
粉末喷涂



双层抗紫外线亚克力



高强度玻璃纤维纱帘  
遮光帘

## 规格参数



规格型号 W-H	外形尺寸/mm (W+30)-(H+30)	开口尺寸/mm (W) - (H)
700-500	730-530	700-500
800-450	830-480	800-450
900-500	930-530	900-500

规格可根据用户要求协商定制。  
W：窗安装面的宽，单位mm；  
H：窗安装面的高，单位mm。

## 产品特点及主要功能


- 窗框：**高强度铝合金型材，粉末喷涂。常规色为黑色、白色，也可以根据客户要求定制银灰色。
- 玻璃：**双层抗紫外线亚克力玻璃
- 纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）
- 开启：**推拉式开启，单侧玻璃可推拉。
- 主要功能：**该窗户具有透光、防蚊虫、隔音、隔热和良好的防水性能。本推拉窗采用自攻螺钉夹墙固定，安装使用简便，结构轻巧牢固耐用，型号多样。

## 安装示意图

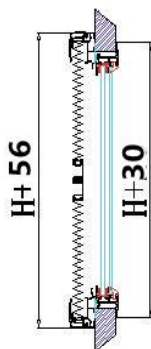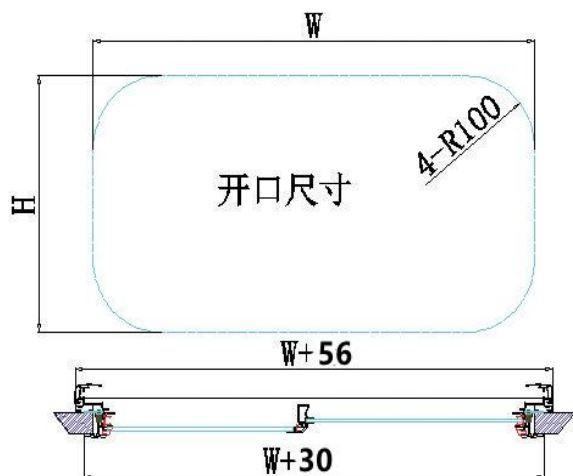

## 主要用途

适用于用于房车或建筑物，  
分别适合不同墙厚：30-80mm。

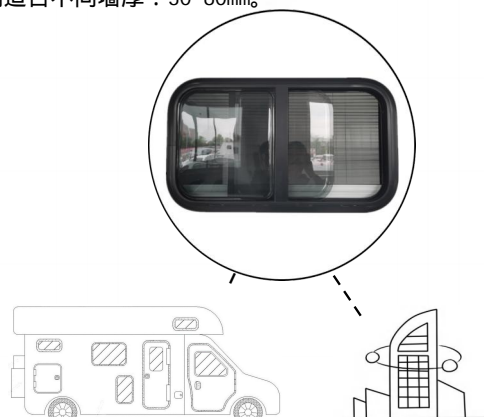

适用于用于房车或建筑物



# SW Double Sliding window



High-quality Aluminum alloy profile, Powder coating



Double layer UV resistant acrylic



High-quality glass fiber Gauze curtain Shading curtain integration

## Specification parameters


Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W)-(H)
700-500	730-530	700-500
800-450	830-480	800-450
900-500	930-530	900-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

## Installation diagram

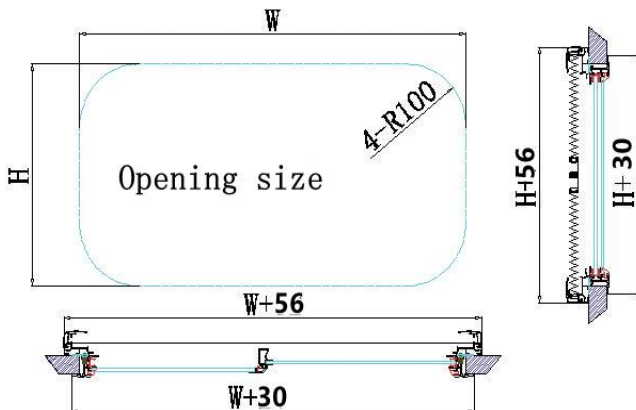

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Glass:** Double layer UV resistant acrylic glass.


**Gauze curtain:** High-quality glass fiber gauze curtain and Shading curtain integration.(optional)

**Open:** push-pull type open, one side glass can push pull..

**Main function:** The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

## Main applications

Used in RV or buildings, suitable for different wall thickness: 30-80mm.



Used in RV or buildings



# HW双层外推窗（圆角）



高强度铝合金型材  
粉末喷涂



支撑杆



双层抗紫外线  
亚克力



高强度玻璃纤维纱帘  
遮光帘

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

**窗框颜色：**常规色为黑色；

也可以根据客户要求定制银灰色。

**玻璃：**双层抗紫外线亚克力玻璃。

**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）

**开启：**窗户装有支撑杆，可以外推打开两个角度，

最大可开启65度。

**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊

虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口（小窗户除外）。结构轻巧，安装使用简便，牢固耐用，型号多样。

## 主要用途

适用于用于房车或建筑物，  
分别适合不同墙厚：30-80mm。


## 规格参数

规格型号 W-H	外形尺寸/mm (W+28)-(H+28)	开口尺寸/mm (W)-(H)
400-300	428-328	400-300
500-300	528-328	500-300
500-350	528-378	500-350
500-400	528-428	500-400
500-450	528-478	500-450
500-500	528-528	500-500
550-400	578-428	550-400
550-500	578-528	550-500
600-300	628-328	600-300
600-350	628-378	600-350
600-450	628-478	600-450
600-500	628-528	600-500
600-600	628-628	600-600
700-400	728-428	700-400
700-450	728-478	700-450
700-500	728-528	700-500
700-550	728-578	700-550
750-400	778-428	750-400
750-450	778-478	750-450
800-400	828-428	800-400
800-450	828-478	800-450
800-500	828-528	800-500
800-600	828-628	800-600
800-700	828-728	800-700
800-800	828-828	800-800
900-350	928-378	900-350
900-450	928-478	900-450
900-500	928-528	900-500
900-550	928-578	900-550
900-900	928-928	900-900
950-500	978-528	950-500
1000-450	1028-478	1000-450
1000-500	1028-528	1000-500
1000-600	1028-628	1000-600
1000-800	1028-828	1000-800
1100-450	1128-478	1100-450
1100-500	1128-528	1100-500
1100-550	1128-578	1100-550
1200-300	1228-328	1200-300
1200-350	1228-378	1200-350
1200-400	1228-428	1200-400
1200-500	1228-528	1200-500
1200-600	1228-628	1200-600
1220-705	1248-733	1220-705
1300-550	1328-578	1300-550
1450-500	1478-528	1450-500
1450-550	1478-578	1450-550


规格可根据用户要求协商定制。

W：窗安装面的宽，单位mm；

H：窗安装面的高，单位mm。

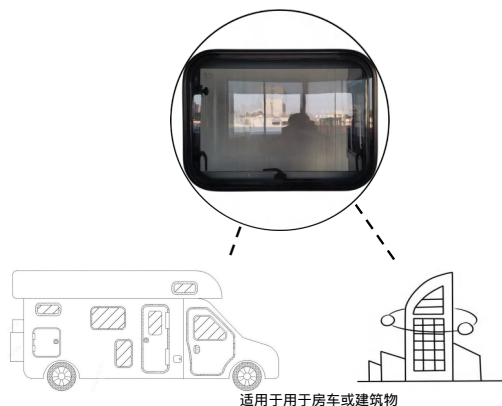

## 安装示意图

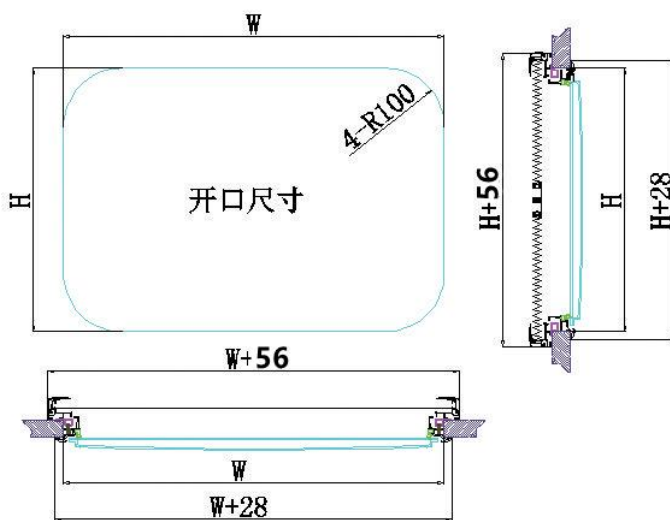



# HW double Tophung Hinged window (Rounded corners)




High-quality Aluminum alloy profile, Powder coating



Support bar



Double layer UV resistant acrylic



High-quality glass fiber Gauze curtain Shading curtain integration



## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.

**Normal colors :** black , **Customized colors:** silver grey, etc.

**Glass:** Double layer uv - resistant acrylic glass.

**Gauze curtain:** High-quality fiberglass curtain and shading curtain.

**Open:** The window is equipped with a support rod, which can be pushed to open two angles, and can open up to 65 degrees.


**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, shading, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

## Main applications


Used in RV or buildings, suitable for different wall thickness: 30-80mm.



Used in RV or buildings



## Installation diagram

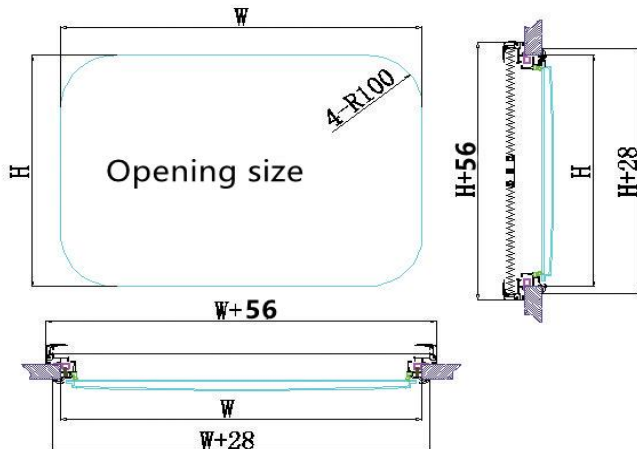

## Specification parameters

Regular Size W-H	Product Size/mm (W+28)-(H+28)	Cutout Size/mm (W)-(H)
400-300	428-328	400-300
500-300	528-328	500-300
500-350	528-378	500-350
500-400	528-428	500-400
500-450	528-478	500-450
500-500	528-528	500-500
550-400	578-428	550-400
550-500	578-528	550-500
600-300	628-328	600-300
600-350	628-378	600-350
600-450	628-478	600-450
600-500	628-528	600-500
600-600	628-628	600-600
700-400	728-428	700-400
700-450	728-478	700-450
700-500	728-528	700-500
700-550	728-578	700-550
750-400	778-428	750-400
750-450	778-478	750-450
800-400	828-428	800-400
800-450	828-478	800-450
800-500	828-528	800-500
800-600	828-628	800-600
800-700	828-728	800-700
800-800	828-828	800-800
900-350	928-378	900-350
900-450	928-478	900-450
900-500	928-528	900-500
900-550	928-578	900-550
900-900	928-928	900-900
950-500	978-528	950-500
1000-450	1028-478	1000-450
1000-500	1028-528	1000-500
1000-600	1028-628	1000-600
1000-800	1028-828	1000-800
1100-450	1128-478	1100-450
1100-500	1128-528	1100-500
1100-550	1128-578	1100-550
1200-300	1228-328	1200-300
1200-350	1228-378	1200-350
1200-400	1228-428	1200-400
1200-500	1228-528	1200-500
1200-600	1228-628	1200-600
1220-705	1248-733	1220-705
1300-550	1328-578	1300-550
1450-500	1478-528	1450-500
1450-550	1478-578	1450-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;



# HW双层外推窗（方角）



高强度铝合金型材  
粉末喷涂



高强度玻璃纤维纱帘  
遮光帘



支撑杆



双层抗紫外线  
亚克力

## 规格参数

规格型号 W-H	外形尺寸/mm (W+50)-(H+50)	开口尺寸/mm (W)-(H)
350-280	400-330	350-280
400-300	450-350	400-300
500-300	550-350	500-300
500-350	550-400	500-350
500-400	550-450	500-400
500-450	550-500	500-450
500-500	550-550	500-500
550-400	600-450	550-400
550-500	600-550	550-500
600-300	650-350	600-300
600-350	650-400	600-350
600-450	650-500	600-450
600-500	650-550	600-500
600-600	650-650	600-600
700-400	750-450	700-400
700-450	750-500	700-450
700-500	750-550	700-500
700-550	750-600	700-550
750-400	800-450	750-400
750-450	800-500	750-450
800-400	850-450	800-400
800-450	850-500	800-450
800-500	850-550	800-500
800-600	850-650	800-600
800-700	850-750	800-700
800-800	850-850	800-800
900-350	950-400	900-350
900-450	950-500	900-450
900-500	950-550	900-500
900-550	950-600	900-550
900-900	950-950	900-900
950-500	1000-550	950-500
1000-450	1050-500	1000-450
1000-500	1050-550	1000-500
1000-600	1050-650	1000-600
1000-800	1050-850	1000-800
1100-450	1150-500	1100-450
1100-500	1150-550	1100-500
1100-550	1150-600	1100-550
1200-300	1250-350	1200-300
1200-350	1250-400	1200-350
1200-400	1250-450	1200-400
1200-500	1250-550	1200-500
1200-600	1250-650	1200-600
1220-705	1270-755	1220-705
1300-550	1350-600	1300-550
1450-500	1500-550	1450-500
1450-550	1500-600	1450-550

规格可根据用户要求协商定制。  
W：窗安装面的宽，单位mm；  
H：窗安装面的高，单位mm。

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

**窗框颜色：**常规为黑色；  
也可以根据客户要求定制银灰色。


**玻璃：**双层抗紫外线亚克力玻璃。

**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）

**开启：**窗户装有支撑杆，可以外推打开两个角度，  
最大可开启65度。



**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口（小窗户除外）。结构轻巧，安装使用简便，牢固耐用，型号多样。

## 安装示意图

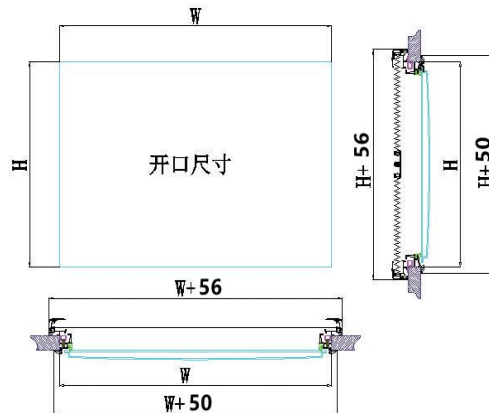

## 主要用途

适用于用于房车或建筑物，  
分别适合不同墙厚：30-80mm。



适用于用于房车或建筑物



# HW double Tophung Hinged window (Right Angle)




High-quality Aluminum alloy profile, Powder coating



High-quality glass fiber Gauze curtain Shading curtain integration



Support bar



Double layer UV resistant acrylic



## Specification parameters

Regular Size W-H	Product Size/mm (W+50)-(H+50)	Cutout Size/mm (W) - (H)
350-280	400-330	350-280
400-300	450-350	400-300
500-300	550-350	500-300
500-350	550-400	500-350
500-400	550-450	500-400
500-450	550-500	500-450
500-500	550-550	500-500
550-400	600-450	550-400
550-500	600-550	550-500
600-300	650-350	600-300
600-350	650-400	600-350
600-450	650-500	600-450
600-500	650-550	600-500
600-600	650-650	600-600
700-400	750-450	700-400
700-450	750-500	700-450
700-500	750-550	700-500
700-550	750-600	700-550
750-400	800-450	750-400
750-450	800-500	750-450
800-400	850-450	800-400
800-450	850-500	800-450
800-500	850-550	800-500
800-600	850-650	800-600
800-700	850-750	800-700
800-800	850-850	800-800
900-350	950-400	900-350
900-450	950-500	900-450
900-500	950-550	900-500
900-550	950-600	900-550
900-900	950-950	900-900
950-500	1000-550	950-500
1000-450	1050-500	1000-450
1000-500	1050-550	1000-500
1000-600	1050-650	1000-600
1000-800	1050-850	1000-800
1100-450	1150-500	1100-450
1100-500	1150-550	1100-500
1100-550	1150-600	1100-550
1200-300	1250-350	1200-300
1200-350	1250-400	1200-350
1200-400	1250-450	1200-400
1200-500	1250-550	1200-500
1200-600	1250-650	1200-600
1220-705	1270-755	1220-705
1300-550	1350-600	1300-550
1450-500	1500-550	1450-500
1450-550	1500-600	1450-550

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.

**Normal colors :** black , **Customized colors:** silver grey, etc.

**Glass:** Double layer uv - resistant acrylic glass.


**Gauze curtain:** High-quality fiberglass curtain and shading curtain.

**Open:** The window is equipped with a support rod, which can be pushed to open two angles, and can open up to 65 degrees.

**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, shading, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.


## Main applications

Used in RV or buildings, suitable for different wall thickness: 30-80mm.



Used in RV or buildings

## Installation diagram

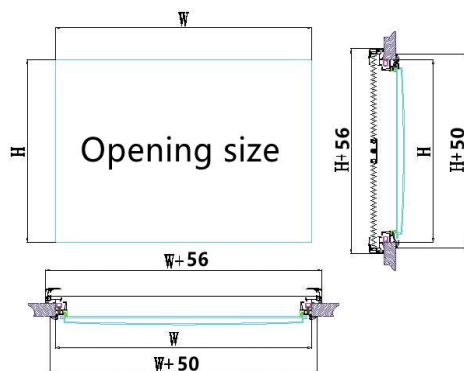

Specifications can be customized according to customer requirements.

**W:** Width of Window mounting surface, unit mm;


**H:** Height of the Window mounting surface, unit mm;



# HW外推窗（圆角单层钢化）



高强度铝合金型材  
粉末喷涂



高强度玻璃纤维纱帘  
遮光帘



单层钢化玻璃



支撑杆

## 规格参数

规格型号 W-H	外形尺寸/mm (W+28)-(H+28)	开口尺寸/mm (W)-(H)
400-300	428-328	400-300
500-300	528-328	500-300
500-350	528-378	500-350
500-400	528-428	500-400
500-450	528-478	500-450
500-500	528-528	500-500
550-400	578-428	550-400
550-500	578-528	550-500
600-300	628-328	600-300
600-350	628-378	600-350
600-450	628-478	600-450
600-500	628-528	600-500
600-600	628-628	600-600
700-400	728-428	700-400
700-450	728-478	700-450
700-500	728-528	700-500
700-550	728-578	700-550
750-400	778-428	750-400
750-450	778-478	750-450
800-400	828-428	800-400
800-450	828-478	800-450
800-500	828-528	800-500
800-600	828-628	800-600
800-700	828-728	800-700
800-800	828-828	800-800
900-350	928-378	900-350
900-450	928-478	900-450
900-500	928-528	900-500
900-550	928-578	900-550
900-900	928-928	900-900
950-500	978-528	950-500
1000-450	1028-478	1000-450
1000-500	1028-528	1000-500
1000-600	1028-628	1000-600
1000-800	1028-828	1000-800
1100-450	1128-478	1100-450
1100-500	1128-528	1100-500
1100-550	1128-578	1100-550
1200-300	1228-328	1200-300
1200-350	1228-378	1200-350
1200-400	1228-428	1200-400
1200-500	1228-528	1200-500
1200-600	1228-628	1200-600
1220-705	1248-733	1220-705
1300-550	1328-578	1300-550
1450-500	1478-528	1450-500
1450-550	1478-578	1450-550

规格可根据用户要求协商定制。  
W：窗安装面的宽，单位mm；  
H：窗安装面的高，单位mm。

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

**窗框颜色：**常规色为黑色。

**玻璃：**4mm钢化玻璃(获得安全认证)



**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。(可选)

**开启：**窗户装有支撑杆，可以外推打开两个角度，  
最大可开启65度。

**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口（小窗户除外）。结构轻巧，安装使用简便，牢固耐用，型号多样。


## 主要用途

适用于用于房车或建筑物，  
分别适合不同墙厚：30-80mm。



适用于用于房车或建筑物

## 安装示意图

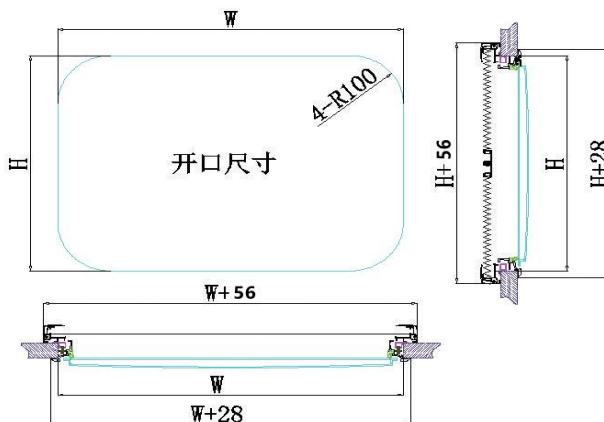



# HW Tophung Hinged window (rounded corner single Toughened glass)



High-quality  
Aluminum alloy profile,  
Powder coating



High-quality glass fiber  
Gauze curtain  
Shading curtain integration



single Toughened glass



Support bar



## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.

**Normal colors :** black , **Customized colors:** silver grey, etc.

**Glass:** 4mm toughened glass (certified for safety)


**Gauze curtain:** High-quality fiberglass curtain and shading curtain.

**Open:** The window is equipped with a support rod, which can be pushed to open two angles, and can open up to 65 degrees.

**Main function:** The window has the functions of opening, closing, ventilation, light transmission, shading, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models

## Main applications


Used in RV or buildings,  
suitable for different wall thickness: 30-80mm.



Used in RV or buildings



## Installation diagram

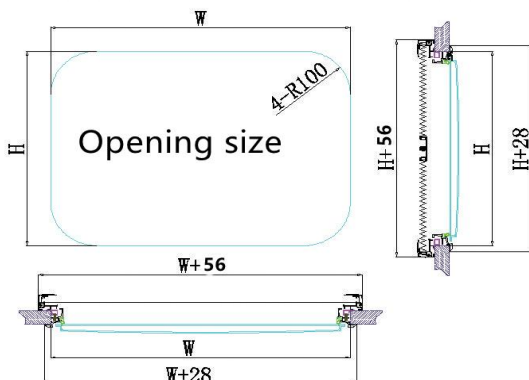

## Specification parameters

Regular Size W-H	Product Size/mm (W+28)-(H+28)	Cutout Size/mm (W) - (H)
400-300	428-328	400-300
500-300	528-328	500-300
500-350	528-378	500-350
500-400	528-428	500-400
500-450	528-478	500-450
500-500	528-528	500-500
550-400	578-428	550-400
550-500	578-528	550-500
600-300	628-328	600-300
600-350	628-378	600-350
600-450	628-478	600-450
600-500	628-528	600-500
600-600	628-628	600-600
700-400	728-428	700-400
700-450	728-478	700-450
700-500	728-528	700-500
700-550	728-578	700-550
750-400	778-428	750-400
750-450	778-478	750-450
800-400	828-428	800-400
800-450	828-478	800-450
800-500	828-528	800-500
800-600	828-628	800-600
800-700	828-728	800-700
800-800	828-828	800-800
900-350	928-378	900-350
900-450	928-478	900-450
900-500	928-528	900-500
900-550	928-578	900-550
900-900	928-928	900-900
950-500	978-528	950-500
1000-450	1028-478	1000-450
1000-500	1028-528	1000-500
1000-600	1028-628	1000-600
1000-800	1028-828	1000-800
1100-450	1128-478	1100-450
1100-500	1128-528	1100-500
1100-550	1128-578	1100-550
1200-300	1228-328	1200-300
1200-350	1228-378	1200-350
1200-400	1228-428	1200-400
1200-500	1228-528	1200-500
1200-600	1228-628	1200-600
1220-705	1248-733	1220-705
1300-550	1328-578	1300-550
1450-500	1478-528	1450-500
1450-550	1478-578	1450-550

Specifications can be customized according to customer requirements

.W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface,unit mm ;





# 推拉窗（单侧内置纱窗）



## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

常规色为黑色、白色，  
也可以根据客户要求定制银灰色。

**玻璃：**4mm钢化玻璃（获得安全认证）。

**纱窗：**单侧内置纱窗

**开启：**推拉式开启，单侧玻璃可推拉。

**主要功能：**该窗户具有透光、防蚊虫、隔音、隔热和良好的防水性能。本推拉窗采用自攻螺钉夹墙固定，安装使用简便，结构轻巧牢固耐用，型号多样。

## 主要用途


适用于用于房车或建筑物，  
分别适合不同墙厚：30-80mm。



适用于用于房车或建筑物



高强度铝合金型材  
粉末喷涂



单侧内置纱窗



4mm钢化玻璃

## 规格参数


规格型号 W-H	外形尺寸/mm (W+30)-(H+30)	开口尺寸/mm (W)-(H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

规格可根据用户要求协商定制。

W：窗安装面的宽，单位mm；

H：窗安装面的高，单位mm。

## 安装示意图

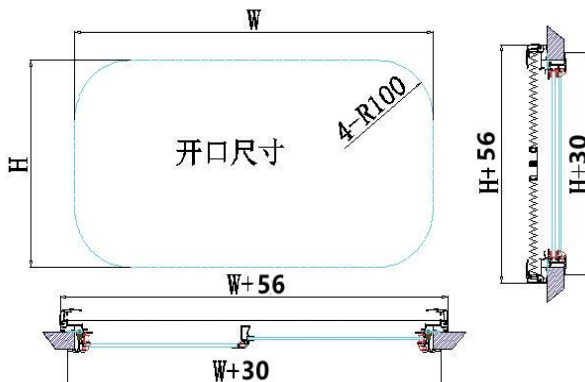



# Sliding window (one side built-in screen window)

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.

**Normal colors :** black and white;

**Customized colors:** silver grey, etc.

**Glass:** 4mm toughened glass (certified for safety) .


**Gauze curtain:** One side built-in screen window

**Open:** Push-pull type open, one side glass can push pull.

**Main function:** The window has light transmission prevention Insect, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.



High-quality Aluminum alloy profile, Powder coating




One side built-in screen window



4mm single Toughened glass

## Installation diagram

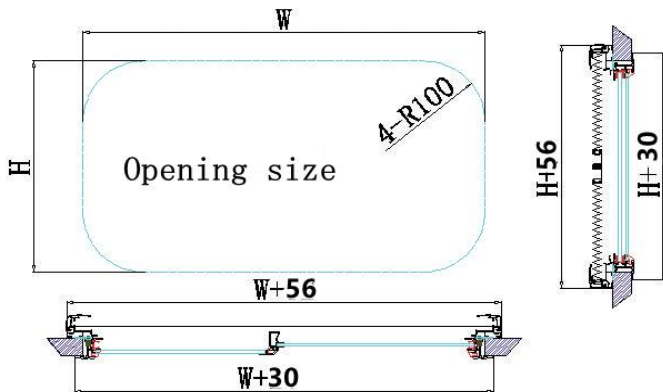


## Specification parameters

Regular Size W-H	Product Size/mm (W+30) - (H+30)	Cutout Size/mm ( W ) - ( H )
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

## Main applications

Used in RV or buildings,  
suitable for different wall thickness: 30-80mm.

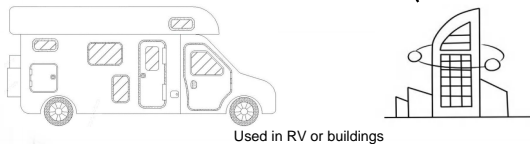

Used in RV or buildings

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;



# 提升窗



高强度铝合金型材  
粉末喷涂



高强度玻璃纤维纱帘  
遮光帘



4mm钢化玻璃

## 规格参数

规格型号 H-W	外形尺寸/mm (H+30)-(W+30)	开口尺寸/mm (H)-(W)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550


## 主要用途

适用于用于房车或建筑物，  
分别适合不同墙厚：30-80mm。



适用于用于房车或建筑物

## 安装示意图

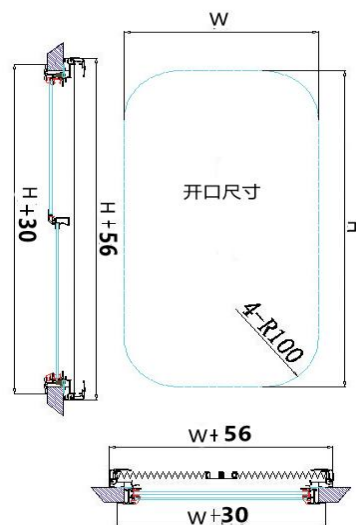

规格可根据用户要求协商定制。

W：窗安装面的宽，单位mm；

H：窗安装面的高，单位mm。

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

常规色为黑色、白色，

也可以根据客户要求定制银灰色。

**玻璃：**4mm钢化玻璃（获得安全认证）。

**纱窗：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）

**开启：**提升式开启，单侧玻璃可提升。

**主要功能：**该窗户具有透光、防蚊虫、隔音、隔热和良好的防水性能。本推拉窗采用自攻螺钉夹墙固定，安装使用简便，结构轻巧牢固耐用，型号多样。



# RV Vertical Sliding window



High-quality Aluminum alloy profile, Powder coating




High-quality glass fiber Gauze curtain Shading curtain integration



4mm single Toughened glass


## Main applications

Used in RV or buildings, suitable for different wall thickness: 30-80mm.



Used in RV or buildings

## Installation diagram

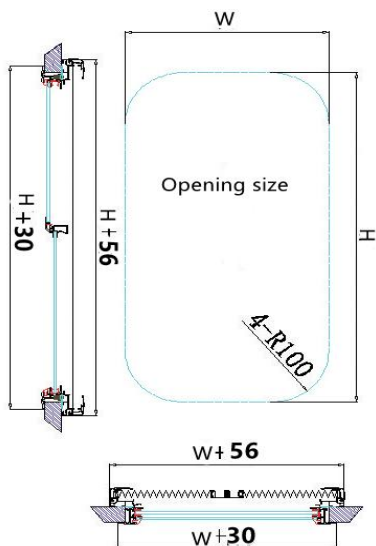

## Specification parameters

Regular Size H-W	Product Size/mm (H+30) - (W+30)	Cutout Size/mm (H) - (W)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.

**Normal colors :** black and white; ,

**Customized colors:** silver grey, etc.

**Glass:** 4mm toughened glass (certified for safety) .

**Gauze curtain:** High-quality fiberglass curtain and shading curtain.

**Open:** Lift open, one side glass can lift.

**Main function:** The window has light transmission, Insect prevention , sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.



# VENT排气扇



隐私透明采光材质



白色抗紫外线 ASA 材质



纱网

## 规格参数

规格型号 W-H	外形尺寸/mm (W+78)-(H+78)	开口尺寸/mm (W)-(H)
280-280	358-358	280-280

规格可根据用户要求协商定制。

W：排气扇安装面的宽，单位mm；

H：排气扇安装面的高，单位mm。

## 主要用途

拖挂式房车和自走式房车。

适用墙体厚度 25-65mm。

## 产品特点及主要功能

**扇体：**白色抗紫外线 ASA 材质，





**顶盖：**隐私透明采光材质。

**电机：**全新开发的12V、20W直流电机，自带温度感控系统，防止电机过热影响寿命。

**使用：**仅通过按动一个按钮，通风扇即可简便地选择向车内提供新鲜空气（进风）和通风换气（排风）。雨雪天气可在外盖关闭情况下，依然实现通风功能。

**主要功能：**该排气扇具有开、关、锁、通风、透光、防蚊虫和良好的防水性能。结构轻巧，安装使用简便，牢固耐用，型号多样。

## 安装示意图

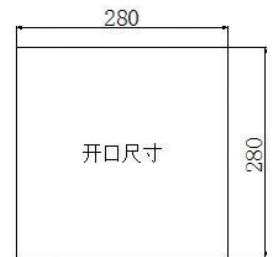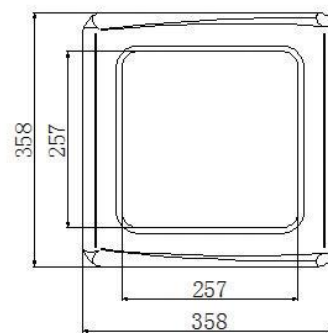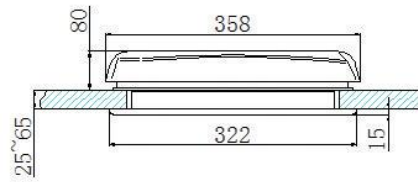

拖挂式房车和自走式房车



# VENT exhaust fan



Privacy transparent lighting material



White anti-ULTRAVIOLET ASA material



Gauze

## Specification parameters




Regular Size W-H	Product Size/mm (W+78) - (H+78)	Cutout Size/mm (W) - (H)
280-280	358-358	280-280

Specifications can be customized according to customer requirements.

W: Width of VENT exhaust fan mounting surface, unit mm;

H: Height of the VENT exhaust fan mounting surface, unit mm;

## Installation diagram

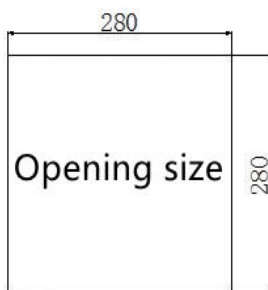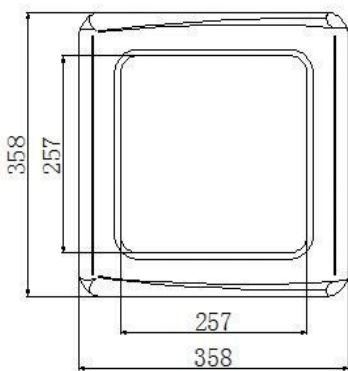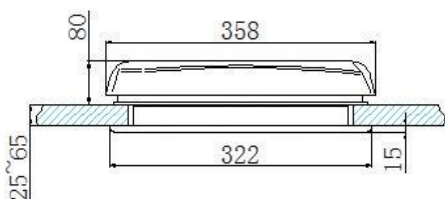

## Main applications

RV and self-propelled trailers.  
Suitable for wall thickness of 25-65mm.




## Product Features and Main Functions

**Fan body:** White anti-ULTRAVIOLET ASA material,  
**Top of the exhaust fan :** Private transparent lighting material

**Motor:** The newly developed 12V and 20W DC motor is equipped with temperature control system to prevent overheating of the motor from affecting its service life.

**Use:** Simply press a button and ventilator can provide fresh air (air intake) and ventilation (air exhaust) to the car. Rain and snow weather can be closed in the case of the cover, still achieve ventilation function.

**Main function:** The exhaust fan has the characteristics of opening, closing, locking, ventilation, light transmission, Insect prevention and good waterproof performance. Light structure, easy to install and use, firm and durable, various models.



RV and self-propelled trailers



# 弧形外推窗

## 产品图片



## 产品细节



双层抗紫外线  
亚克力



高强度铝合金型材  
粉末喷涂



支撑杆

## 规格参数

规格型号 W-H	外形尺寸/mm (W+56)-(H+54)	开口尺寸/mm (W)-(H)
280-380	336-434	280-380
490-500	546-554	490-500
600-450	656-504	600-450
750-455	806-504	750-455
818-315	874-365	818-315
900-400	956-454	900-400
900-450	956-504	900-450
985-465	1041-519	985-465
960-450	1016-504	960-450

规格可根据用户要求协商定制。  
W：窗安装面的宽，单位mm；  
H：窗安装面的弧长高，单位mm。

## 主要用途

本产品适用于房车，分别适合不同墙厚：30-80mm。



适用于房车

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。


**窗框颜色：**常规色为黑色。

**玻璃：**双层抗紫外线亚克力玻璃。

**开启：**窗户装有支撑杆，可以外推打开两个角度，最大可开启65度。

**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口（小窗户除外）。结构轻巧，安装使用简便，牢固耐用，型号多样。

## 安装示意图

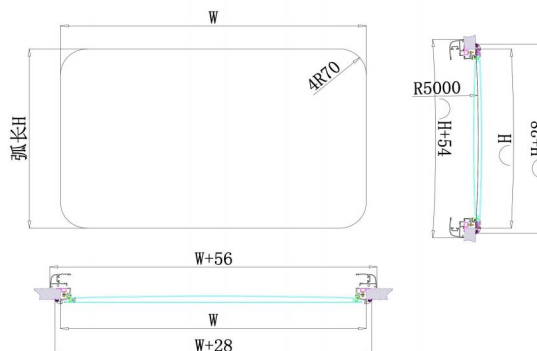



# RV Arc Tophung Hinged window

## Product pictures



## Product features



Double layer UV resistant acrylic



High-quality Aluminum alloy profile, Powder coating



support rod

## Specification parameters


Regular Size W-H	Product Size/mm (W+56)-(H+54)	Cutout Size/mm (W)-(H)
280-380	336-434	280-380
490-500	546-554	490-500
600-450	656-504	600-450
750-455	806-504	750-455
818-315	874-365	818-315
900-400	956-454	900-400
900-450	956-504	900-450
985-465	1041-519	985-465
960-450	1016-504	960-450

Specifications can be negotiated and customized according to user requirements.

W: Width of window mounting surface, unit: mm;  
 H: Arc length height of window mounting surface, unit: mm.

## Main applications

RV  
 Suitable for wall thickness of 30-80mm.

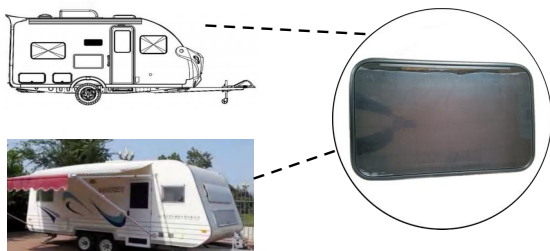

Windows are suitable for special requirements of RV

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.


**Normal colors :** black ,  
**Customized colors:** custom color.

**Glass:** Double layer uv - resistant acrylic glass.

**Open:** The window is equipped with support rods, which can be pushed to open two angles, and can open up to 65 degrees.

**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, shading, Insect prevention , sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.


## Installation diagram

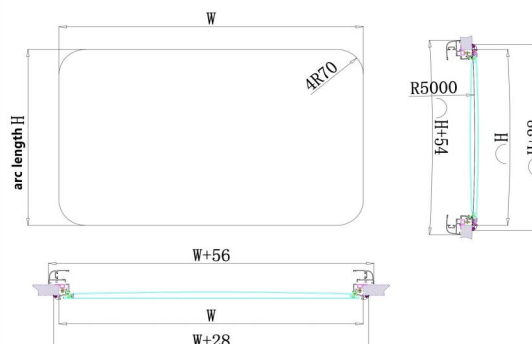





# 房车天窗




高强度铝合金型材  
粉末喷涂



高强度玻璃纤维纱帘  
遮光帘



双层抗紫外线亚克力



气撑杆

## 规格参数

规格型号 W-H	外形尺寸/mm (W+127)-(H+127)	开口尺寸/mm (W)-(H)
450-400	577-527	450-400
500-500	627-627	500-500
700-500	827-627	700-500

规格可根据用户要求协商定制。  
W：窗安装面的宽，单位mm；  
H：窗安装面的高，单位mm。

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

**窗框颜色：**常规色为黑色。



**玻璃：**双层抗紫外线亚克力玻璃。

**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）

**开启：**气撑杆，最大可开启65°。

**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。结构轻巧，安装使用简便，牢固耐用。

## 安装示意图

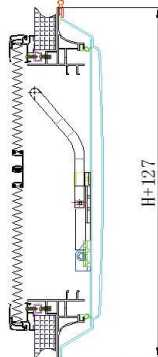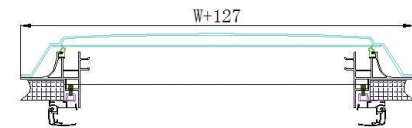

## 主要用途

适用于用于房车或建筑物，  
分别适合不同墙厚：30-80mm。



适用于用于房车或建筑物



# RV Skylight



High-quality Aluminum alloy profile, Powder coating



High-quality glass fiber Gauze curtain Shading curtain integration



Double layer UV resistant acrylic



Gas support rod



## Specification parameters




Regular Size W-H	Product Size/mm (W+127) - (H+127)	Cutout Size/mm (W) - (H)
450-400	577-527	450-400
500-500	627-627	500-500
700-500	827-627	700-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

## Installation diagram

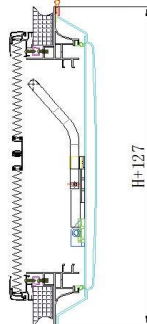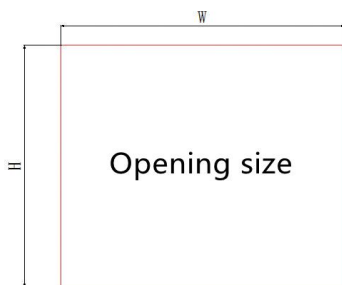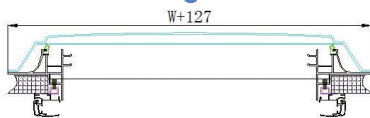

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.

**Normal colors :** black ,

**Customized colors:** custom color.

**Glass:** Double layer uv - resistant acrylic glass.


**Gauze curtain:** High-quality fiberglass curtain and shading curtain.

**Open:** The air brace can open up to 65°.

**Main function:** The window has the functions of opening, closing, ventilating, transmitting light, shading, prevention Insect , sound insulation, heat insulation, privacy and good waterproof performance. Light structure, easy to install and use, firm and durable.

## Main applications

Used in RV or buildings, suitable for different wall thickness: 30-80mm.



Used in RV or buildings



# 房车天窗（遥控灯光）



## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

**窗框颜色：**常规色为黑色。

**玻璃：**双层抗紫外线亚克力玻璃。

**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）

**开启：**气撑杆，最大可开启65°。

**灯光：**通过一把小巧的灯光控制钥匙控制灯光的开、关

**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。结构轻巧，安装使用简便，牢固耐用。




高强度铝合金型材  
粉末喷涂



高强度玻璃纤维纱帘  
遮光帘



双层抗紫外线亚克力



气撑杆

## 规格参数



规格型号 W-H	外形尺寸/mm (W+127)-(H+127)	开口尺寸/mm (W)-(H)
450-400	577-527	450-400
500-500	627-627	500-500
700-500	827-627	700-500

规格可根据用户要求协商定制。  
W：窗安装面的宽，单位mm；  
H：窗安装面的高，单位mm。

## 主要用途

适用于用于房车或建筑物，  
分别适合不同墙厚：30-80mm。

## 安装示意图

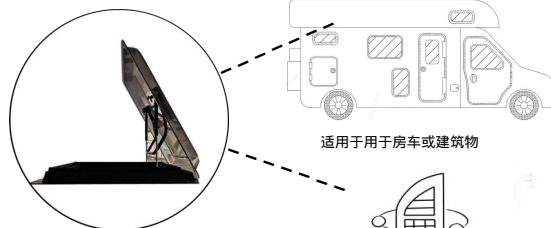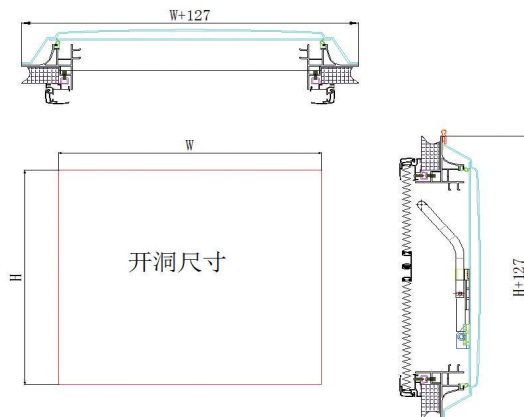



# RV Skylight ( Remote control lights )



## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.

**Normal colors :** black ,

**Customized colors:** custom color.

**Glass:** Double layer uv - resistant acrylic glass.

**Gauze curtain:** High-quality fiberglass curtain and shading curtain.

**Open:** The air brace can open up to 65°.

**Light:** A small light control key controls the opening and closing of the light

**Main function:** The window has the functions of opening, closing, ventilating, transmitting light, shading, prevention Insect, sound insulation, heat insulation, privacy and good waterproof performance. Light structure, easy to install and use, firm and durable.



High-quality Aluminum alloy profile, Powder coating



High-quality glass fiber Gauze curtain Shading curtain integration



Double layer UV resistant acrylic



Gas support rod

## Specification parameters

Regular Size W-H	Product Size/mm (W+127) - (H+127)	Cutout Size/mm (W) - (H)
450-400	577-527	450-400
500-500	627-627	500-500
700-500	827-627	700-500

Specifications can be customized according to customer requirements.





**W:** Width of Window mounting surface, unit mm;

**H:** Height of the Window mounting surface, unit mm ;

## Main applications

Used in RV or buildings, suitable for different wall thickness: 30-80mm.

## Installation diagram

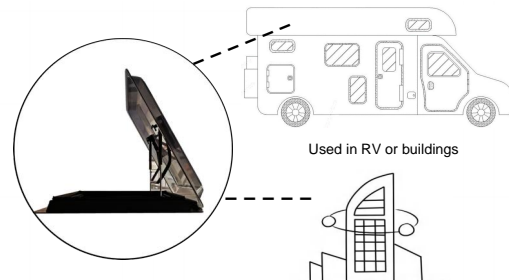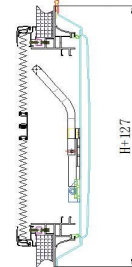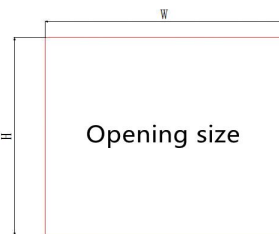

Used in RV or buildings




# 前额天窗

## 产品图片



## 产品细节



双层抗紫外线  
亚克力



高强度铝合金型材  
粉末喷涂



支撑杆



高强度玻璃纤维纱帘  
遮光帘

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

**窗框颜色：**常规色为黑色。

**玻璃：**双层抗紫外线亚克力玻璃。

**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）

**开启：**窗户装有支撑杆，可以外推打开两个角度，最大可开启65度。

**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口（小窗户除外）。结构轻巧，安装使用简便，牢固耐用，型号多样。

## 规格参数

规格型号 W-H	外形尺寸/mm (W+404)-(H+56)	开口尺寸/mm (W)-(H)
900-600	1304-656	900-600

规格可根据用户要求协商定制。



W：窗安装面的宽，单位mm；

H：窗安装面的弧长高，单位mm。


## 安装示意图

## 主要用途

本产品适用于房车，分别适合不同墙厚：30-80mm。




本产品适用于房车

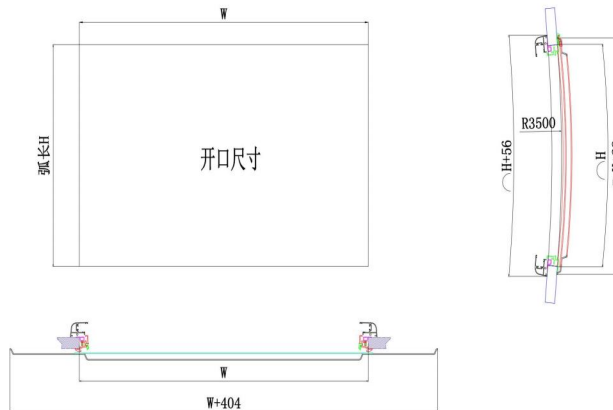



# RV Curved Skylight

## Product features



Double layer UV resistant acrylic



Support rod



High-quality Aluminum alloy profile, Powder coating



High-quality glass fiber Gauze curtain Shading curtain integration

## Product pictures



## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.  
**Normal colors :** black ,  
**Customized colors:** custom color.

**Glass:** Double layer uv - resistant acrylic glass.

**Gauze curtain:** High-quality fiberglass curtain and shading curtain.

**Open:** The window is equipped with a support rod, which can be pushed to open two angles, and can open up to 65 degrees.

**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, shading, Insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

## Specification parameters

Regular Size W-H	Product Size/mm (W+404)-(H+56)	Cutout Size/mm (W)-(H)
900-600	1304-656	900-600



Specifications can be negotiated and customized according to user requirements.

**W:** Width of window mounting surface, unit: mm;


**H:** Arc length height of window mounting surface, unit: mm.

## Main applications

Used in RV ,  
suitable for different wall thickness: 30-80mm.

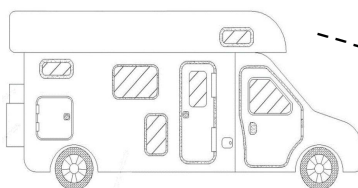

## Installation diagram

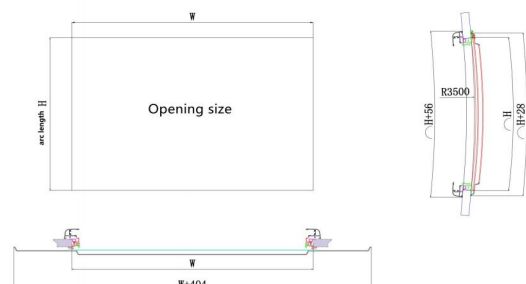



# 星空窗

## 产品图片

正面：



背面：



## 产品细节




单层钢化玻璃



高强度铝合金型材  
粉末喷涂

## 应用场景



## 规格参数

规格型号 W-H	外形尺寸/mm (W+26)-(H+26)	开口尺寸/mm (W)-(H)
-------------	--------------------------	--------------------

1200-1900    1226-1926    1200-1900

规格可根据用户要求协商定制。

W：窗安装面的宽，单位mm；

H：窗安装面的弧长高，单位mm。

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。  
常规色为黑色、白色，  
也可以根据客户要求定制银灰色。

**玻璃：**4mm钢化玻璃（获得安全认证）。



**开启：**固定窗，不可开启。

**主要功能：**该窗户具有透光、防蚊虫、  
隔音、隔热和良好的防水性能。  
窗户采用自攻螺钉夹墙固定，  
安装使用简便，结构轻巧牢固  
耐用，型号多样。

## 主要用途

用于房车。 分别适合不同墙厚：30-80mm。

## 安装示意图

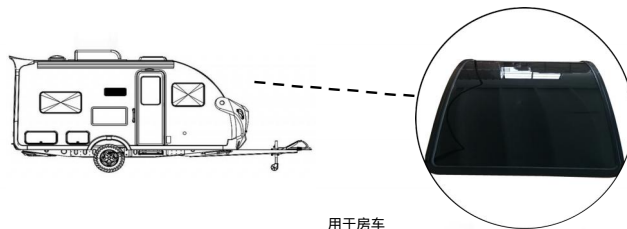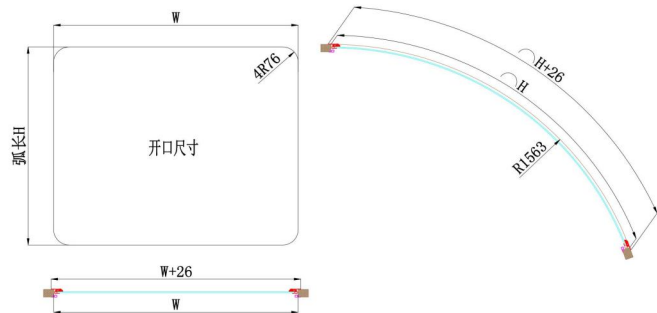

用于房车



# Starry sky window

## Product pictures



## Product features



Toughened glass



High-quality Aluminum alloy profile, Powder coating

## Application scenario



## Installation diagram

### Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
1200-1900	1226-1926	1200-1900

Specifications can be negotiated and customized according to user requirements.

W: Width of window mounting surface, unit: mm;

H: Arc length height of window mounting surface, unit: mm.

### Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profile, powder coating.


**Normal colors:** black and white;

**Customized colors:** silver grey, etc

**Glass:** 4mm toughened glass (certified for safety)

**Open:** Fixed window, not open.

**Main function:** The window has light transmission, Insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

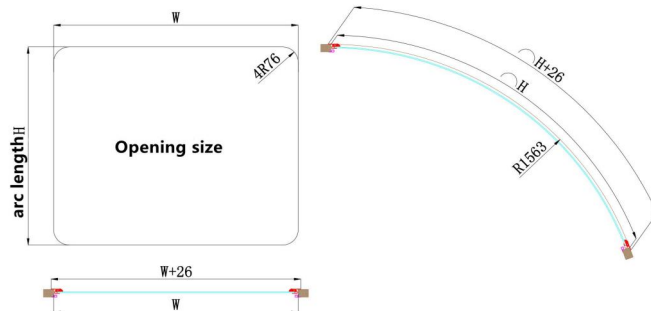

Used in RV

### Main applications

Used in RV , suitable for different wall thickness: 30-80mm.





# 帐篷天窗

## 产品图片



## 产品细节



## 产品特点及主要功能

**窗 框：**高强度铝合金型材，粉末喷涂。

**窗框颜色：**常规色为黑色。

**玻 璃：**单层抗紫外线亚克力玻璃  
双层抗紫外线亚克力玻璃（可选）。

**开 启：**档位支撑杆，最大可开启65°  
气撑杆（可选）

**主要功能：**该窗户具有开、关、通风、透光、隔音、隔热、私密性等功能和良好的防水性能。结构轻巧，安装使用简便，牢固耐用。

## 规格参数


规格型号 (W-H)	外形尺寸/mm (W+117)-(H+117)	开口尺寸/mm (W)-(H)
704-504	821-621	704-504

规格可根据用户要求协商定制。  
W: 窗户安装面的宽，单位mm；  
H: 窗户安装面的高，单位mm。

## 主要用途

用于房车或帐篷。适用墙厚4-6mm,特殊墙厚可定制。

## 安装示意图

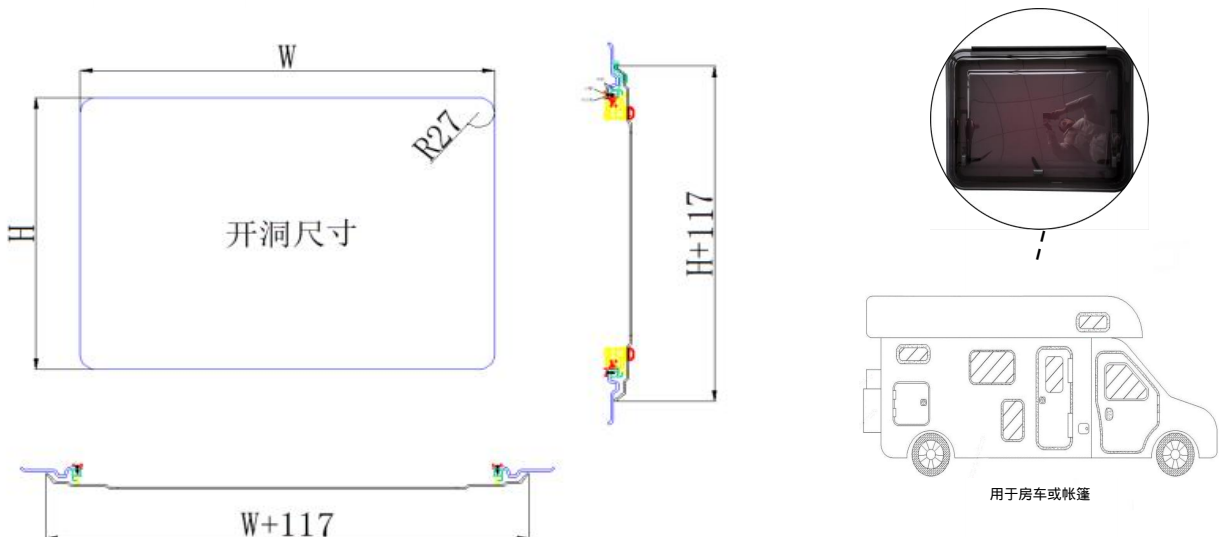



# Tent skylight

## Product pictures



## Product features



High-quality  
Aluminum alloy  
Powder coating



UV resistant acrylic glass



Support rod

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profiles, powder coating.

**Normal colors :** black ,

**Customized colors:** custom color.

**Glass:** Single-layer UV-resistant acrylic glass  
Double-layer UV resistant acrylic glass (optional).

**Open:** Gear support rod, Maximum opening 65 °  
Air strut (optional)

**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, sound insulation, heat insulation, privacy and good waterproof performance. Lightweight structure, easy installation and use, firm and durable.

## Specification parameters

Regular Size (W-H)	Product Size/mm (W+117)-(H+117)	Cutout Size/mm (W)-(H)
704-504	821-621	704-504

Specifications can be negotiated and customized according to user requirements.




W: Width of window mounting surface, unit: mm;

H: Arc length height of window mounting surface, unit: mm.


## Main applications

Used for caravans or tents. Applicable wall thickness is 4-6 mm, and special wall thickness can be customized.

## Installation diagram

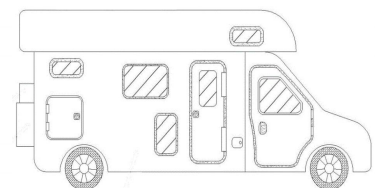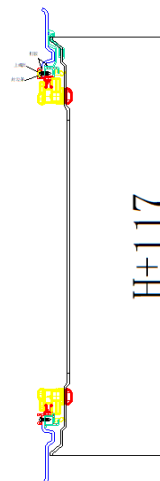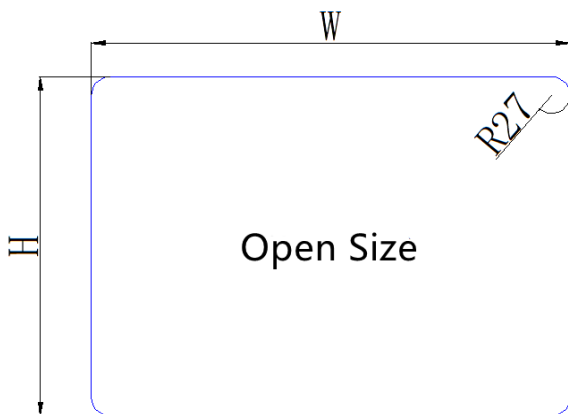

Used for caravans or tents.





# MS-F手动单层折叠踏步

## 产品特点及主要功能

**结构件：**高强度碳钢。

**踏板：**高强度铝合金型材，表面有防滑设计。

**五金件：**SUS304。

**外观：**结构件黑色喷涂，踏板表面阳极氧化处理，也可根据客户要求定制黑色。

**主要功能：**该产品设计巧妙，安装隐蔽，安全可靠，可轻松承重200KG。可安装在任何车辆门口的底盘 或可受力部件上，方便人员上下车。

## 产品图片



## 规格参数

规格型号 W	踏板净尺寸 (长-宽)	安装孔间距 (W-20)
MS-F-450-S	450-210	430
MS-F-500-S	500-210	480
MS-F-550-S	550-210	530

MS-F-600-S 600-210 580

规格可根据用户要求协商定制。

W：踏步踏板净尺寸长度。

三级及以上踏步可定制

## 产品细节

### 规格说明


MS-F-W- S

MS-F: 代表产品代号；

W：表示踏步净尺寸的长；

S：分别表示踏步的阶数，单层

### 安装示意图

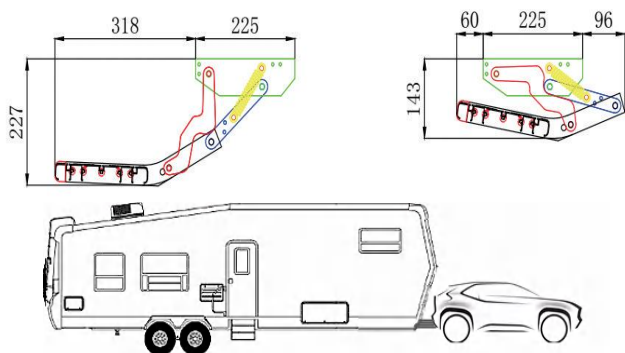

高强度碳钢



高强度铝合金型材  
表面有防滑设计



SUS304





# MS-F manual folding Single step

## Product pictures



## Product Features and Main Functions

**Structural member:** High-quality carbon steel.

**Pedals:** High-quality aluminum alloy profiles with anti-skid surface design.

**Hardware:** SUS304.

**Appearance:** Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

**Main function:** Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

## Specification

**MS-F-W- S**

**MS-F:** Represents product code;

**W:** Represents the length of the net size of the step;

**S:** Represents the number of steps, single

## Product features



High-quality carbon steel



High-quality aluminum alloy profiles with anti-skid surface design




SUS304

## Specification parameters



Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
MS-F-450-S	450-210	430
MS-F-500-S	500-210	480
MS-F-550-S	550-210	530
MS-F-600-S	600-210	580

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.

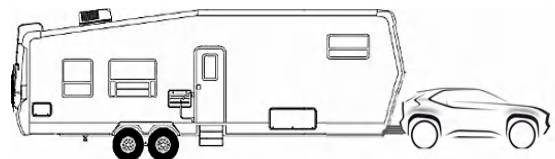

## Installation diagram

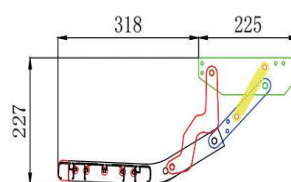

NOTE: Steps above three levels can be customized



# MS-F手动双层折叠踏步

## 产品特点及主要功能

**结构件**：高强度碳钢。

**踏板**：高强度铝合金型材，表面有防滑设计。

**五金件**：SUS304。

**外观**：结构件黑色喷涂，踏板表面阳极氧化处理，也可根据客户要求定制黑色。

**主要功能**：该产品设计巧妙，安装隐蔽，安全可靠，可轻松承重200KG。可安装在任何车辆门口的底盘 或可受力部件上，方便人员上下车。

## 产品图片



## 规格参数

规格型号 W	踏板净尺 (长-宽)	安装孔间距 (W-20)
MS-F-450-D	450-210	430
MS-F-500-D	500-210	480
MS-F-550-D	550-210	530
MS-F-600-D	600-210	580

规格可根据用户要求协商定制。

W：踏步踏板净尺寸长度。

三级及以上踏步可定制

## 产品细节

## 规格说明



MS-F-W- D

MS-F：代表产品代号；

W：表示踏步净尺寸的长；

D：分别表示踏步的阶数，双层

## 安装示意图

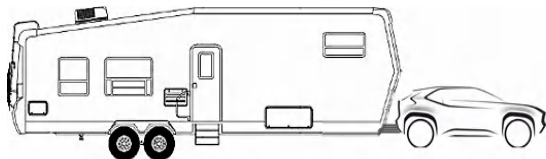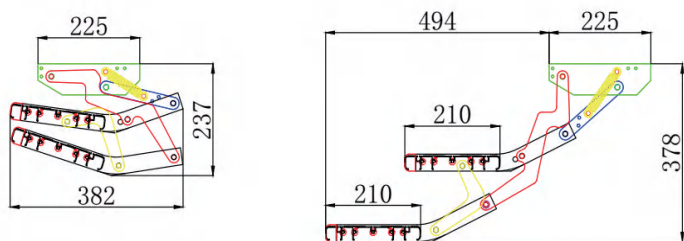

高强度碳钢



高强度铝合金型材  
表面有防滑设计



SUS304



# MS-F manual folding Double step

## Product pictures



## Product Features and Main Functions

**Structural member:** High-quality carbon steel.

**Pedals:** High-quality aluminum alloy profiles with anti-skid surface design.

**Hardware:** SUS304.

**Appearance:** Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

**Main function:** Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

## Specification

**MS-F-W- S**

**MS-F:** Represents product code;

**W:** Represents the length of the net size of the step;

**S:** Represents the number of steps, single

## Product features



High-quality carbon steel



High-quality aluminum alloy profiles with anti-skid surface design



SUS304

## Specification parameters




Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
MS-F-450-D	450-210	430
MS-F-500-D	500-210	480
MS-F-550-D	550-210	530
MS-F-600-D	600-210	580

Specifications can be customized according to customer requirements.W:

The net size and length of the step pedal.

NOTE:Steps above three levels can be customized

## Installation diagram

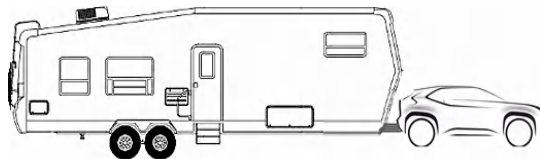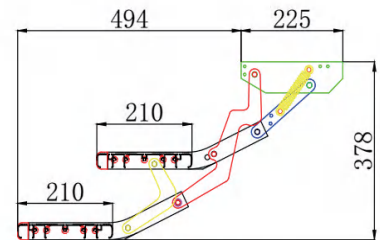



# E-F电动折叠踏步

## 产品图片



双层踏步



单层踏步

## 产品细节



高强度碳钢



SUS304



高强度铝合金型材  
表面有防滑设计



电机

## 产品特点及主要功能

**结构件：**高强度碳钢。

**踏板：**高强度铝合金型材，表面有防滑设计。

**五金件：**SUS304。

**开启：**当门打开时，踏步会自动打开，当门关闭时，踏步会自动收缩。

**外观：**结构件黑色喷涂，踏板表面阳极氧化处理，也可根据客户要求定制黑色。

**主要功能：**该产品设计巧妙，安装隐蔽，安全可靠，可轻松承重200KG。可安装在任何车辆门口的底盘 或可受力部件上，方便人员上下车。当门打开时，踏步会自动打开，当门关闭时，踏步会自动收缩。

## 规格参数

规格型号	踏板净尺 (长-宽)	安装孔间距 (W-20)
E-F-450-S	450-210	430
E-F-500-S	500-210	480
E-F-550-S	550-210	530
E-F-600-S	600-210	580
E-F-450-D	450-210	430
E-F-500-D	500-210	480
E-F-550-D	550-210	530
E-F-600-D	600-210	580

规格可根据用户要求协商定制。

W：踏步踏板净尺寸长度。

## 规格说明

S






E-F-W-D

E-F: 代表产品代号；

W: 表示踏步净尺寸的长；

S、D: 分别表示踏步的阶数，单层、双层

## 安装示意图

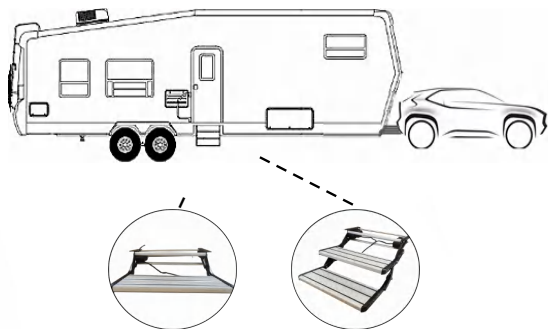



# MS-F Electric folding RV step

## Product pictures



Double step



Single step


## Product features



High-quality carbon steel



SUS304




Motor




High-quality aluminum alloy profiles with anti-skid surface design

## Installation diagram

Single step:



Double step:

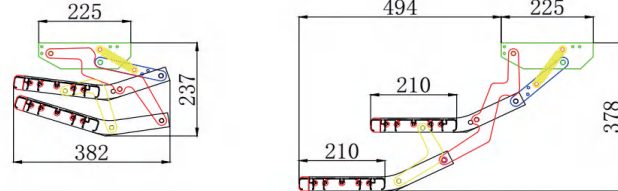

## Product Features and Main Functions

**Structural member:** High-quality carbon steel.

**Pedals:** High-quality aluminum alloy profiles with anti-skid surface design.

**Hardware:** SUS304.

**Open:** When the door is opened, the step will open automatically, and when the door is closed, the step will shrink automatically.

**Appearance:** Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.



**Main function:** Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

## Specification parameters

Regular Size W	Net size of pedal length-width	Spacing of mounting holes (W-20)
E-F-450-S	450-210	430
E-F-500-S	500-210	480
E-F-550-S	550-210	530
E-F-600-S	600-210	580
E-F-450-D	450-210	430
E-F-500-D	500-210	480
E-F-550-D	550-210	530
E-F-600-D	600-210	580

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.

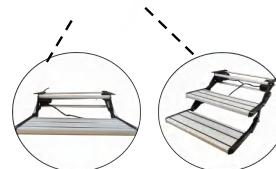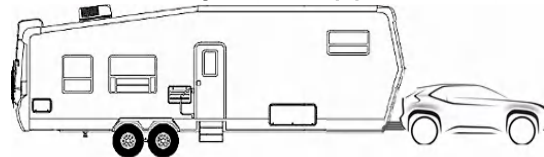

## Specification

S  
E-F-W-D

E-F: Represents product code;

W : Represents the length of the net size of the step;

S, D : Represents the number of steps, single, Double






# HD储物门

## 产品图片



## 产品细节

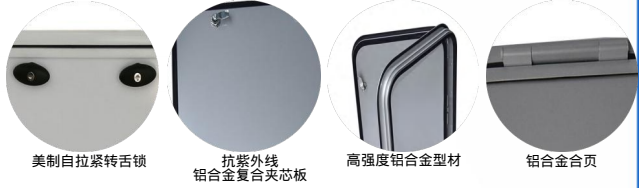

## 应用场景



## 产品特点及主要功能

**边框**：高强度铝合金型材。  
**面板**：抗紫外线或铝合金复合夹芯板。  
**门锁**：美制自拉紧转舌锁。  
**合页**：铝合金合页。  
**外观**：粉末喷涂，常规色为白色，  
也可根据客户要求定制黑色或银灰色。  
**主要功能**：该储物门安装简便，牢固耐用，  
对开口尺寸精度要求低，外表美观，  
能180°开启，  
也可根据客户要求协商定制。

## 规格说明

T  
B WH  
HD-W-H- BL(定制)  
L GR(定制)  
R

HD: 代表产品代号;  
W\*H: 表示产品安装面的宽\*高;  
T/B/L/R: 分别表示合页位置在储物门的上/下/左/右;  
WH/BL/GR: 分别表示颜色为白色/黑色/银灰色。

## 主要用途



营地型拖挂式房车专用, 适合墙厚30-60mm。

## 规格参数

规格型号 W-H	外形尺寸/mm (W+26)-(H+26)	开口尺寸/mm (W)-(H)
400-300	426-326	400-300
450-350	476-376	450-350
500-300	526-326	500-300
500-350	526-376	500-350
500-400	526-426	500-400
600-300	626-326	600-300
600-450	626-476	600-450
650-350	676-376	650-350
650-480	676-506	650-480
700-200	726-226	700-200
700-300	726-326	700-300
700-500	726-526	700-500
700-600	726-626	700-600
800-500	826-526	800-500
800-600	826-626	800-600
900-300	926-326	900-300
900-500	926-526	900-500
1100-500	1126-526	1100-500

规格可根据用户要求协商定制。

## 安装示意图

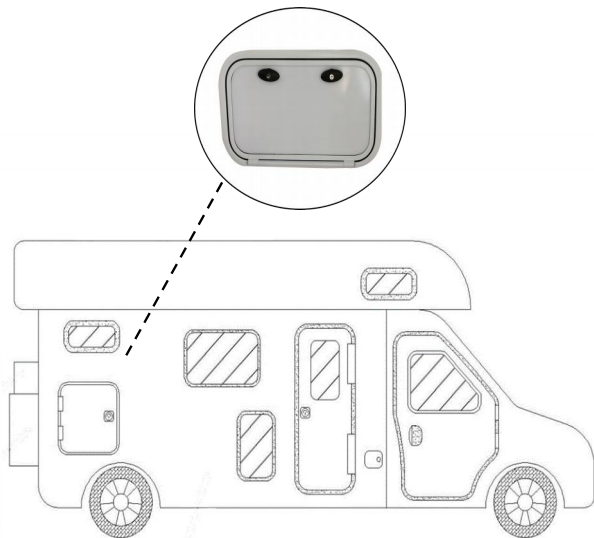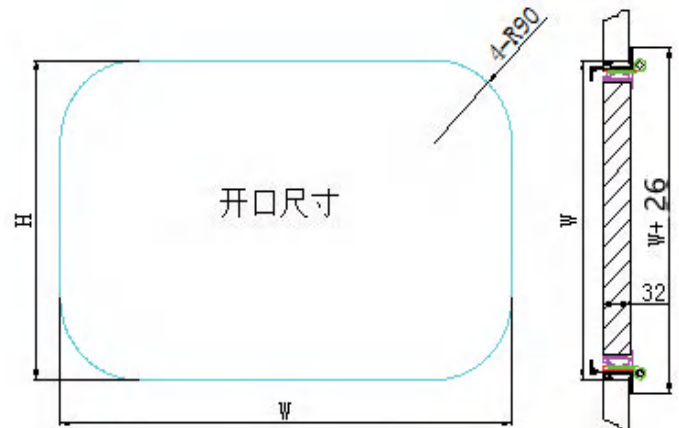



# HD Storage door

## Product features



## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profiles.

**Panel:** Anti-ULTRAVIOLET or Aluminum alloy composite sandwich panel.

**Door lock:** American self - tensioning tongue lock.


**Hinge:** Aluminum alloy hinge.

**Appearance:** Powder coating, white color as usual, black or silver grey as required.

**Main functions:** The storage door is easy to install, firm and durable, has low requirements on the accuracy of opening size, beautiful appearance, can be opened at 180°, and can be customized according to customer requirements.

## Main applications

Camp type trailer special, suitable for wall thickness of 30-60mm.

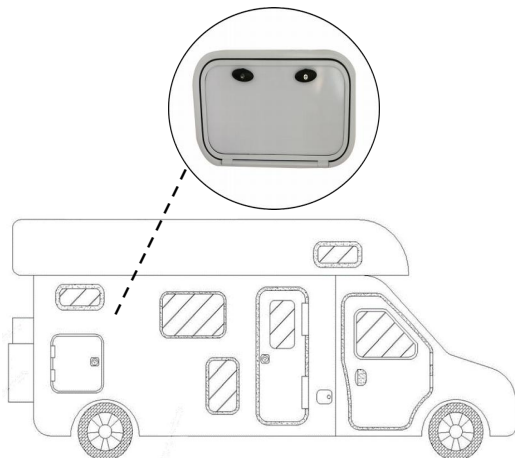

## Product pictures



## Application scenario



## Specification

T  
B WH

HD-W-H- BL(custom)

L  
R GR(custom)

**HD:** Represents product code;

**W\*H :** Represents the width \* height of the product mounting surface;

**T/B/L/R:** The position of hinge is above/below/left/right of the storage door;


**WH/BL/GR :** The colors are white/black/silver gray.

## Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
400-300	426-326	400-300
450-350	476-376	450-350
500-300	526-326	500-300
500-350	526-376	500-350
500-400	526-426	500-400
600-300	626-326	600-300
600-450	626-476	600-450
650-350	676-376	650-350
650-480	676-506	650-480
700-200	726-226	700-200
700-300	726-326	700-300
700-500	726-526	700-500
700-600	726-626	700-600
800-500	826-526	800-500
800-600	826-626	800-600
900-300	926-326	900-300
900-500	926-526	900-500
1100-500	1126-526	1100-500

Specifications can be customized according to customer requirements.

## Installation diagram

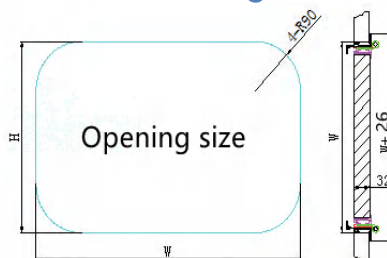



# BD房车舱储门

## 产品特点及主要功能

**边框：**高强度铝合金型材，粉末喷涂。  
 常规色为黑色、白色，  
 也可以根据客户要求定制银灰色。  
**面板：**粉末喷涂高强度铝合金面板/防滑铝板，  
 喷涂色为黑色、白色、银灰色或铝合金本色，  
 也可以根据客户要求定制。  
**支撑杆：**汽车用气弹簧支撑杆。  
**开启：**掀起式开启，开启角度大于90°。  
**门锁：**机械式联动三点锁。  
**主要功能：**该储藏室门实现开、关和锁的功能，  
 结构轻巧，安装使用简便，牢固耐用，  
 型号多样。

**可选项：**  
 1、面板为喷塑铝板；  
 2、面板为防滑铝板。

## 产品图片



## 规格参数

规格型号 W-H	外形尺寸/mm (W+50)-(H+56)	开口尺寸/mm (W)-(H)
1524-450	1574-506	1524-450
1524-380	1574-436	1524-380
1524-385	1574-441	1524-385

规格可根据用户要求协商定制。  
 W：门安装面的宽，单位mm；  
 H：门安装面的高，单位mm。

## 应用场景



## 主要用途

用于房车的储藏室。

## 产品细节



高强度铝合金型材  
粉末喷涂



粉末喷涂  
高强度铝合金面板/防滑铝板




机械式联动三点锁



汽车用气弹簧支撑杆

## 安装示意图

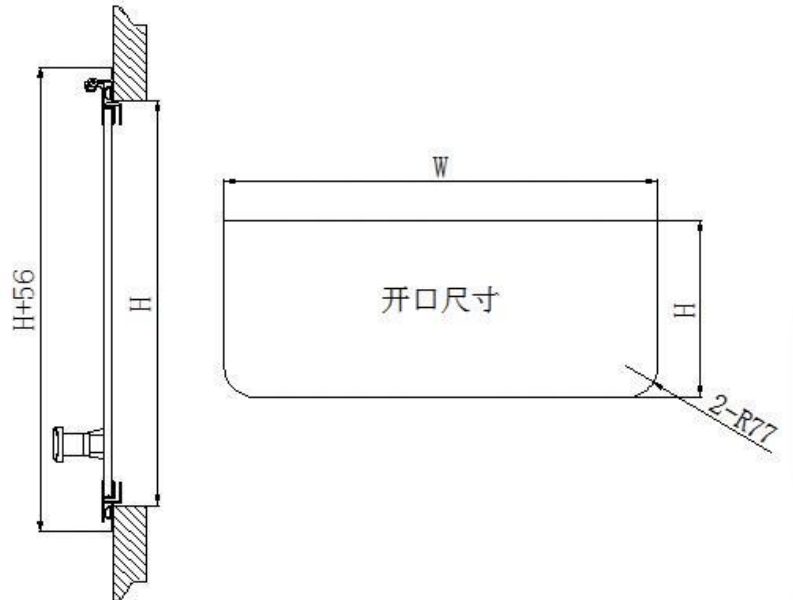



# BD Rv warehousing door

## Product features



High-quality aluminum alloy profile powder spraying



Powder coated High-strength aluminum alloy



mechanical linkage Three point lock



Air spring support rod For automobiles

## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Panel:** Powder coated high-strength aluminum alloy panel/non-slip aluminum plate, painted in black, white, silver gray or aluminum alloy color, can also be customized according to customer requirements.

**Support rod:** Air spring support rod for automobiles.

**Open:** lift open with an opening Angle greater than 90°

**Door lock:** mechanical linkage three point lock.

**Main functions:**The door of The storeroom realizes The function of opening, closing and locking. Light structure, easy to install and use, firm and durable, various models.

### Options:

1. The panel is Sprayed aluminum sheet;
2. Non-slip aluminum panel.

## Main applications

Used in the storage room of RV.

## Specification parameters

Regular Size W-H	Product Size/mm (W+50)-(H+56)	Cutout Size/mm (W)-(H)
1524-450	1574-506	1524-450
1524-380	1574-436	1524-380
1524-385	1574-441	1524-385

Specifications can be customized according to customer requirements.


W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface,unit mm;

## Application scenario



## Installation diagram

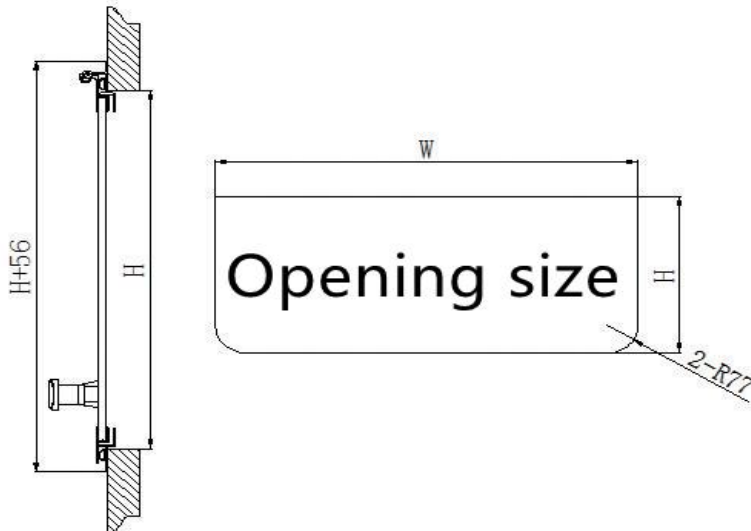


## Product pictures





# 皮卡前推拉窗

## 产品图片

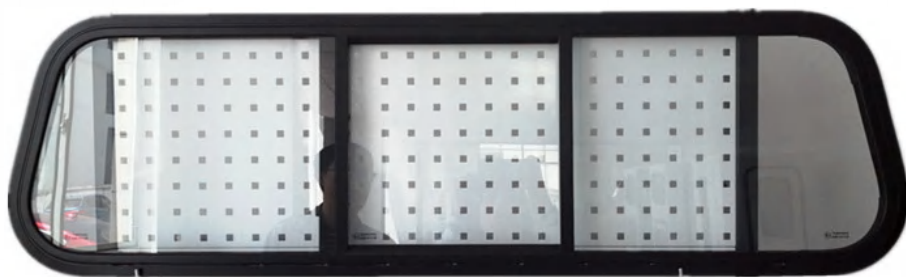

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

常规色为黑色、白色，

也可以根据客户要求定制银灰色。

**玻璃：**3mm钢化玻璃（获得安全认证）。

**开启：**推拉式开启，中间玻璃可推拉。

**主要功能：**该窗户具有透光、防蚊虫、隔音、隔热和  
良好的防水性能。本推拉窗采用自攻螺钉  
夹墙固定，安装使用简便，结构轻巧牢固  
耐用，型号多样。


## 主要用途

本产品适用于各类型的皮卡车

## 规格参数

规格可根据用户要求协商定制。

## 安装示意图

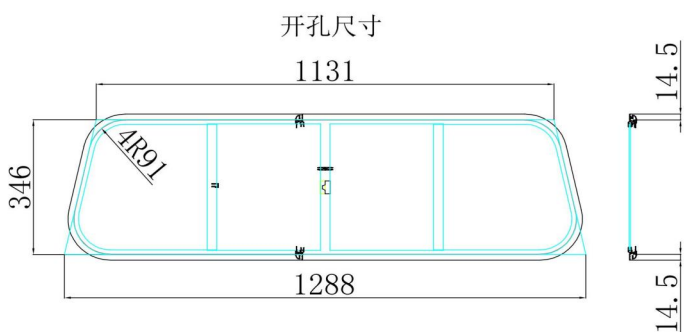

## 产品细节



高强度铝合金型材  
粉末喷涂



3mm钢化玻璃  
(获得安全认证)




推拉式开启  
中间玻璃可推拉





# Pickup sliding window

## Product pictures

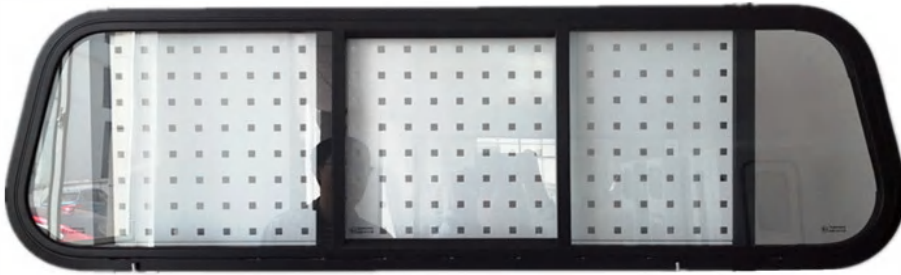

## Product features



High-quality aluminum alloy  
Powder spraying



Push-pull opening



3mm tempered glass

## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Glass:** 3mm tempered glass (with safety certification).

**Opening:** Push-pull opening,

The middle glass can be pushed and pulled.

**Main functions:** The window has good functions of light transmission, sound insulation and insect prevention. The sliding window adopts self tapping screws to fix the wall, which has the advantages of simple installation and use, light structure, firmness and durability, and various models.


## Main applications

This product is applicable to all types of pickup trucks

## Specification parameters

Specifications can be negotiated and customized according to user requirements.

## Installation diagram

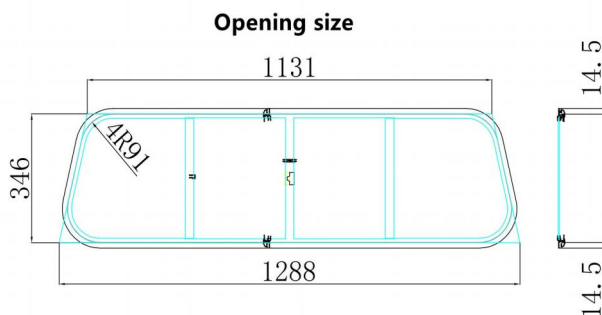



# 皮卡后推拉窗

## 产品图片



## 产品细节



3mm钢化玻璃  
(获得安全认证)



单侧可拆卸纱窗



推拉式开启  
单侧玻璃可推拉



高强度铝合金型材  
粉末喷涂

## 产品特点及主要功能

- 窗框：**高强度铝合金型材，粉末喷涂。常规色为黑色、白色，也可以根据客户要求定制银灰色。
- 玻璃：**3mm钢化玻璃（获得安全认证）。
- 开启：**推拉式开启，单侧玻璃可推拉。
- 纱窗：**单侧内置可拆卸纱窗
- 主要功能：**该窗户具有透光、防蚊虫、隔音、隔热和良好的防水性能。本推拉窗采用自攻螺钉夹墙固定，安装使用简便，结构轻巧牢固耐用，型号多样。


## 规格参数

规格可根据用户要求协商定制。

## 主要用途

本产品适用于各类型的皮卡车

## 安装示意图

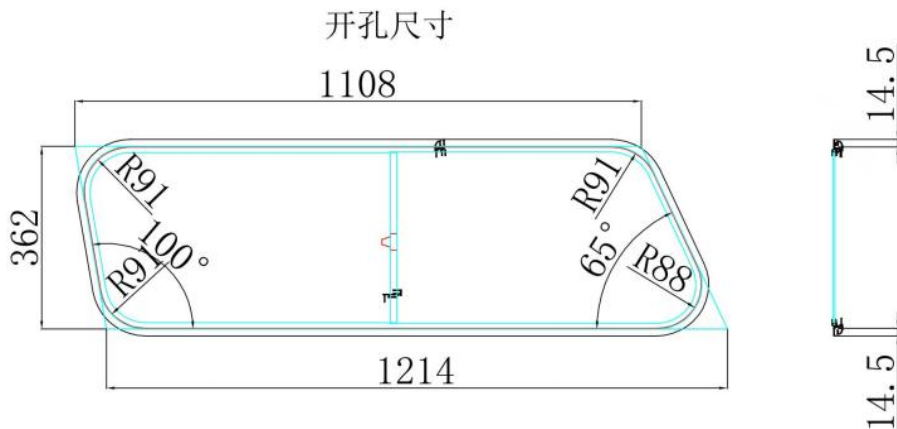



# Pickup sliding window

## Product features



3mm tempered glass



Push-pull opening



One sided screen window



High-quality aluminum alloy  
Powder spraying

## Product pictures



## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Glass:** 3mm tempered glass (with safety certification).

**Opening:** push-pull type open, one side glass can push pull.

**Window screen:** One side built-in removable screen window

**Main functions:** The window has good functions of light transmission, sound insulation and mosquito prevention. The sliding window adopts self tapping screws to fix the wall, which has the advantages of simple installation and use, light structure, firmness and durability, and various models.

## Specification parameters


Specifications can be negotiated and customized according to user requirements.

## Main applications

This product is applicable to all types of pickup trucks

## Installation diagram

### Opening size

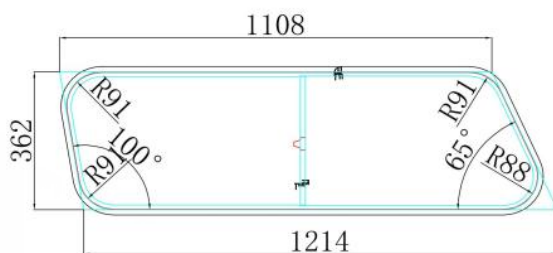





# 皮卡大外推窗

## 产品图片



## 产品细节



3mm钢化玻璃  
 (获得安全认证)



高强度铝合金型材  
 粉末喷涂



气撑杆

## 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。

**窗框颜色：**常规色为黑色。

**玻璃：**3mm钢化玻璃（获得安全认证）。

**开启：**窗户装有气体支撑杆，可以外推。


**主要功能：**：该窗户具有开、关、通风、

透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口（小窗户除外）。结构轻巧，安装使用简便，牢固耐用，型号多样。

## 规格参数

规格可根据用户要求协商定制。

## 安装示意图

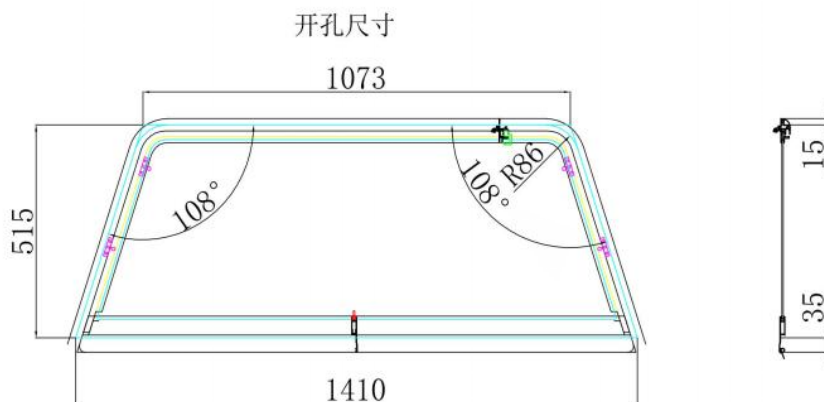

## 主要用途

本产品适用于各类型的皮卡车





# Pickup Tophung Hinged window

## Product pictures



## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black;

**Customized colors:** Custom colors.

**Glass:** 3mm tempered glass (with safety certification).

**Opening:** The window is equipped with a gas support rod, which can be pushed out.

**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, sun shading, Anti mosquito, sound insulation, heat insulation, privacy and other functions and Good waterproof performance. Available when screens and windows are open As an emergency exit (except for small windows). Lightweight structure, It is easy to install and use, firm and durable, and has various models.

## Product features



3mm tempered glass (with safety certification)



High-quality aluminum alloy Powder spraying



Air support rod

## Specification parameters


Specifications can be negotiated and customized according to user requirements.

## Main applications

This product is applicable to all types of pickup trucks

## Installation diagram

### Opening size

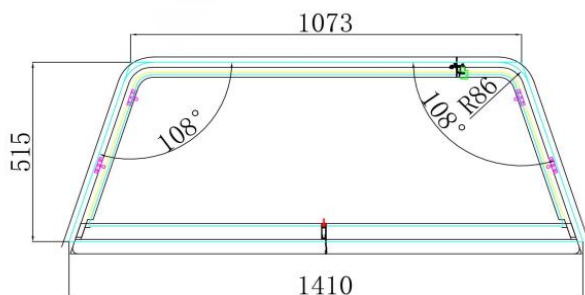




# 皮卡侧外推窗

## 产品图片



## 产品细节



高强度铝合金型材  
粉末喷涂



3mm钢化玻璃  
(获得安全认证)



自拉紧转舌锁



气撑杆

## 产品特点及主要功能

- 窗框:** 高强度铝合金型材, 粉末喷涂。
- 窗框颜色:** 常规色为黑色。
- 玻璃:** 3mm钢化玻璃 (获得安全认证)。
- 窗锁:** 自拉紧转舌锁
- 开启:** 窗户装有气体支撑杆, 可以外推。
- 主要功能:** 该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口(小窗户除外)。结构轻巧, 安装使用简便, 牢固耐用, 型号多样。


## 规格参数

规格可根据用户要求协商定制。

## 主要用途

本产品适用于各类型的皮卡车


## 安装示意图

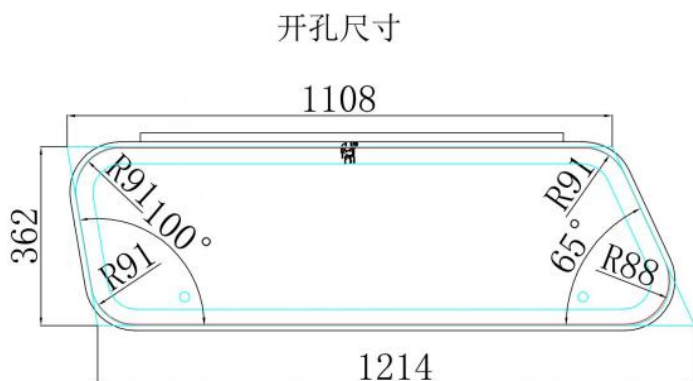



# Pickup Tophung Hinged window

## Product features



High-quality aluminum alloy  
Powder spraying



3mm tempered glass  
(with safety certification)



Self tensioning tongue lock



Air support rod

## Product pictures



## Product Features and Main Functions

**Window frame:** High-quality aluminum alloy profile, powder coating.  
Normal colors: black;

Customized colors: Custom colors.

**Glass:** 3mm tempered glass (with safety certification).

**Window lock:** Self tensioning tongue lock

**Opening:** The window is equipped with a gas support rod, which can be pushed out.

**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, sun shading Anti mosquito, sound insulation, heat insulation, privacy and other functions and Good waterproof performance. Available when screens and windows are open As an emergency exit (except for small windows). Lightweight structure, It is easy to install and use, firm and durable, and has various models.

## Specification parameters


Specifications can be negotiated and customized according to user requirements.

## Main applications

This product is applicable to all types of pickup trucks

## Installation diagram

## Opening size

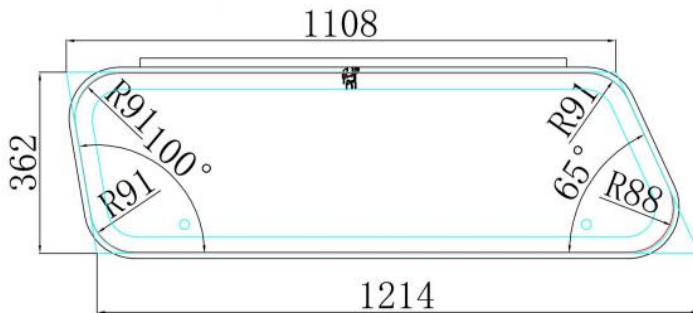



# 无框房车窗

## 产品图片



## 产品细节



双层抗紫外线亚克力



高强度铝合金合页



气撑杆



高强度玻璃纤维纱帘  
遮光帘

## 产品特点及主要功能

**合页：**高强度铝合金合页，粉末喷涂。

**合页颜色：**常规色为黑色。

**玻璃：**双层抗紫外线亚克力玻璃。

**开启：**窗户装有气体支撑杆，可以外推。

打开两个角度，最大可开启65度。

**纱帘：**高强度玻璃纤维纱帘和遮光帘一体化。（可选）


**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口（小窗户除外）。结构轻巧，安装使用简便，牢固耐用，型号多样。

## 规格参数

规格型号	外形尺寸/mm	开口尺寸/mm
W-H	(W+90)-(H+90)	(W)-(H)
700-500	790-590	700-500


规格可根据用户要求协商定制。  
W：窗安装面的宽，单位mm；  
H：窗安装面的高，单位mm。

## 安装示意图

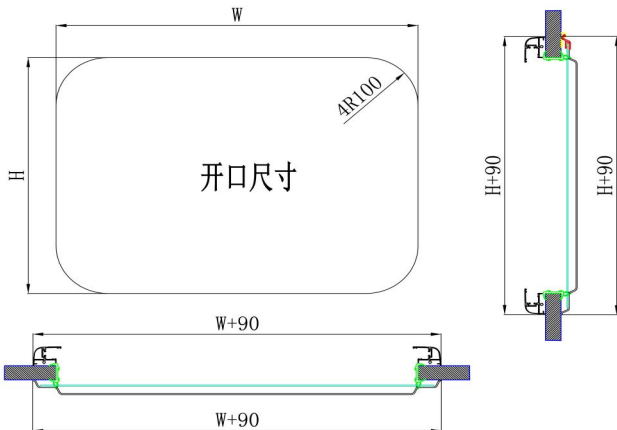

## 主要用途

本产品适用于房车，分别适合不同墙厚：30-80mm。

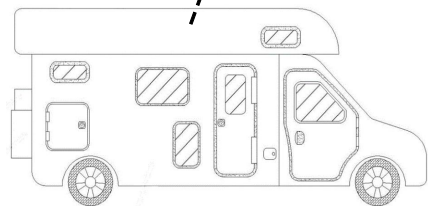



# Frameless RV window

## Product features



Double layer uv - resistant acrylic



High-quality aluminum alloy hinges



Air support rod



High-quality glass fiber Gauze curtain  
Shading curtain integration

## Product pictures



## Product Features and Main Functions

**Window hinges:** High-quality aluminum alloy profiles, powder coating.

**Window hinges color:** Normal color is black.

**Glass:** Double layer uv - resistant acrylic glass.

**Gauze curtain:** High-quality fiberglass curtain and shading curtain.

**Open:** The window is equipped with support rods, which can be pushed to open two angles, and can open up to 65 degrees.

**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, shading, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

## Specification parameters


Specifications W-H	Dimensions/mm (W+90)-(H+90)	Opening size/mm (W)-(H)
700-500	790-590	700-500

Specifications can be customized according to customer requirements.

W: Width of window mounting surface, unit mm;


H: Height of the window mounting surface, unit mm;

## Installation diagram

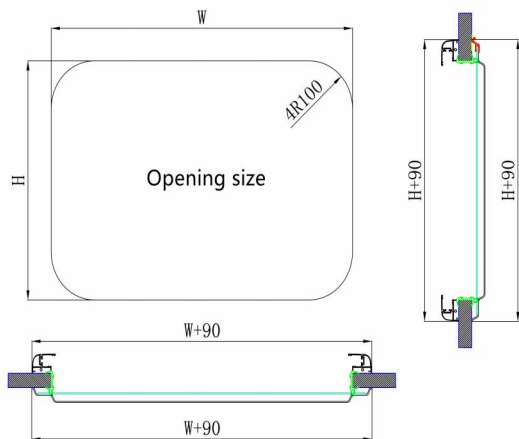

## Main applications

For RV; suitable for different wall thickness: 30-80mm.

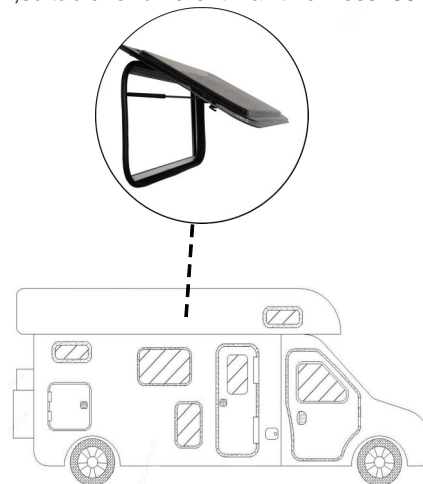



# 房车餐桌

## 产品图片



## 产品细节



高强度铝合金面板



转舌锁



高强度铝合金边框



铝合金合页

## 产品特点及主要功能

**边框：**高强度铝合金型材。

**面板：**高强度铝合金板。

**门锁：**转舌锁。

**合页：**铝合金合页。

**外观：**粉末喷涂，常规色为白色，也可根据客户要求定制黑色或银灰色。

**主要功能：**该小餐桌安装简便，牢固耐用，安装在车体外侧，安装方便，美观大方。

## 规格参数

规格型号 W-H	外形尺寸/mm (W)-(H)	开口尺寸/mm (W)-(H)
800-450	800-450	800-450

规格可根据用户要求协商定制。

## 规格说明

**尺寸：**800mm X 450mm X 20mm


**重量：**5KG

**承重：**30KG

## 主要用途

拖挂式房车和自走式房车。

## 安装示意图

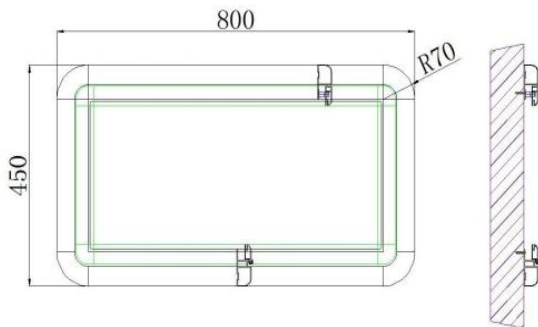



## Product features



High-quality aluminum alloy panel



High-quality aluminum alloy frame



Rotary tongue lock



Aluminium alloy hinge

## Product pictures



## Product Features and Main Functions

**Table frame:** High-quality aluminum alloy profile.

**Table panel :** High-quality aluminum alloy plate.

**Lock:** Rotary tongue lock.

**Hinge:** Aluminum alloy hinge.

**Main function:** The small table is easy to install, firm and durable, installed on the outside of the car body, easy to install, beautiful and generous

## Specification parameters


Regular Size W-H	Product Size/mm (W)-(H)	Cutout Size/mm (W)-(H)
800-450	800-450	800-450

Specifications can be customized according to customer requirements.

## Description


Size: 800mm X 450mm X 20mm  
Product Weight: 5KG  
Load carrying capacity: 30KG

## Installation diagram

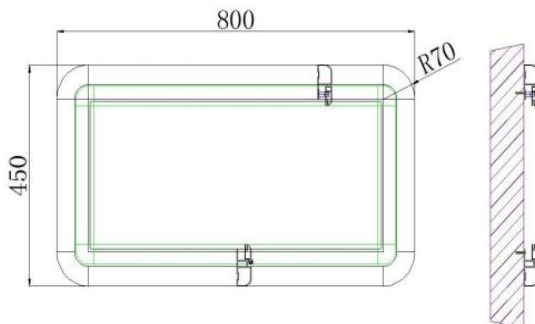

## Main applications

Trailer and self-propelled RV.

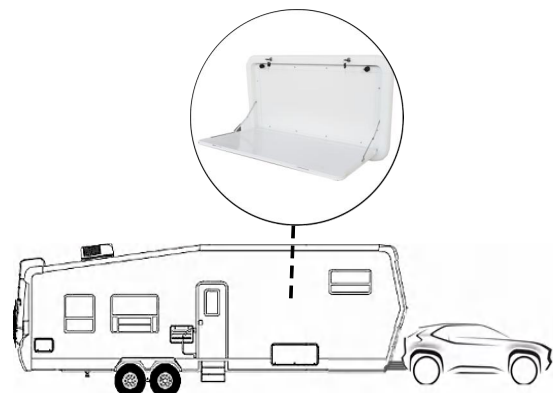








# 房车淋浴门

## 产品图片

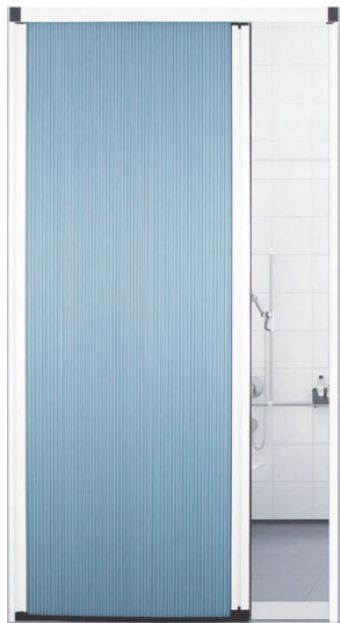

## 产品细节



蜂巢式无纺布



高强度铝合金边框

## 产品特点及主要功能

**边框：**高强度铝合金型材。

**浴帘：**蜂巢式无纺布。

**外观：**常规为天蓝色、米黄色  
也可根据客户要求定制

**主要功能：**本产品采用仿蜂巢结构防水防霉无纺布面料，隔热、降噪、保暖、降温。推拉式开启最大程度节约淋浴空间，展开后，干湿分离无死角，放心淋浴。折叠后，不占用空间，美观大方


## 规格参数

规格可根据用户要求协商定制。  
全铝合金款也可定制。

## 主要用途

房车和建筑物。


## 产品结构

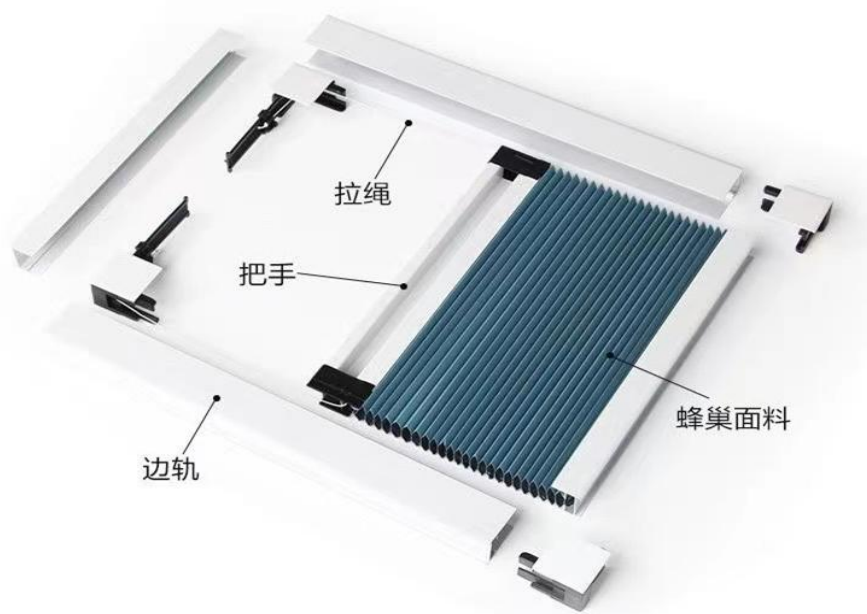




# RV Shower Door

## Product features



Honeycomb structure  
Non-woven fabric



High-quality  
Aluminum alloy frame

## Product pictures



## Product Features and Main Functions

**Frame:** High-quality aluminum alloy profile.

**Shower Curtain:** Honeycomb non-woven fabric.

**Appearance:** The conventional colors are sky blue and beige; it can also be customized according to customer requirements.

**Main functions:** This product adopts honeycomb like structure, waterproof and mildew proof non-woven cloth surface Material, heat insulation, noise reduction, heat preservation and cooling. Push-pull opening maximum Save shower space, after unfolding, dry and wet separation, no dead corner, rest assured to shower, After folding, it does not occupy space and is beautiful


## Specification parameters

Specifications can be customized according to customer requirements.  
Aluminum alloy shower door can also be customized.

## Main applications

RV and buildings.

## Product structure

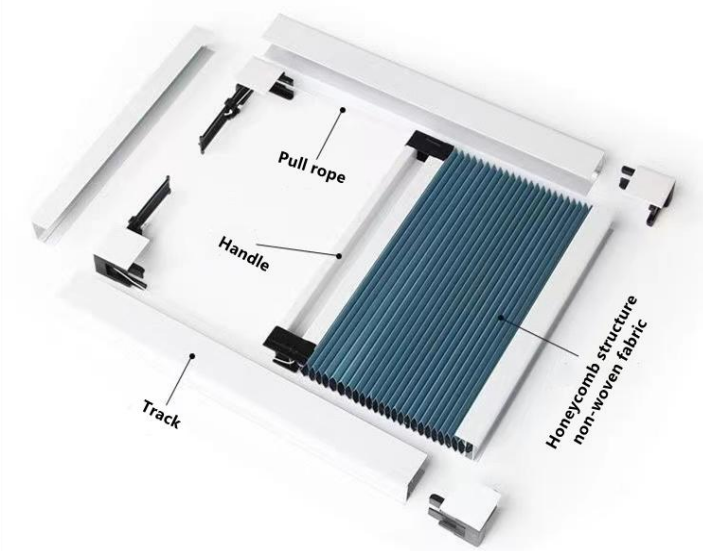



# 铝板（车外身装饰铝板）&导雨槽

## 铝板（车外身装饰铝板）

### 产品图片



### 应用场景



### 规格参数

规格可根据用户要求协商定制。

### 产品特点及主要功能

**铝板**：高强度铝合金表面防紫外线辊涂。

**铝板颜色**：常规颜色为白色。

**安装**：铝板插接方式固定在车身骨架上。


**主要功能**：此件作为房车外观面装饰用，安装方便，可有效降低车身自重，高端、美观、大气。

## 导雨槽

### 产品图片



### 规格说明

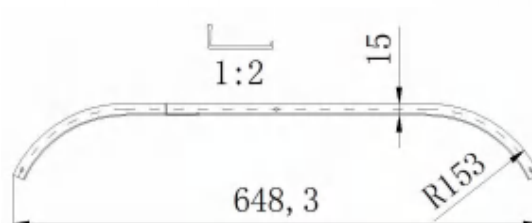

### 规格参数

规格可根据用户要求协商定制。

### 产品特点及主要功能

**导雨槽**：高强度铝合金型材，粉末喷涂。

**颜色**：常规颜色为白色。

**安装**：将导雨槽安装在房车门上方。

**主要功能**：房车门上沿雨水导流作用，提高房车门密封稳定性。该导雨槽安装使用简便。



# Aluminum plate (Aluminum body decoration) & Guide the rain trough

## Aluminum plate (Aluminum body decoration)

### Product pictures



### Application scenarios



### Specification parameters

Specifications can be customized according to customer requirements.

### Product Features and Main Functions

**Aluminum plate:** High-quality aluminum alloy surface anti ultraviolet roller coating.

**Color of aluminum plate:** The conventional color is white.

**Installation:** The aluminum plate is fixed on the body frame by inserting.


**Main functions:** This piece is used as the exterior decoration of the RV. It is easy to install and can effectively reduce the body weight. It is high-end, beautiful and atmospheric.

## Guide the rain trough

### Product pictures



### Description

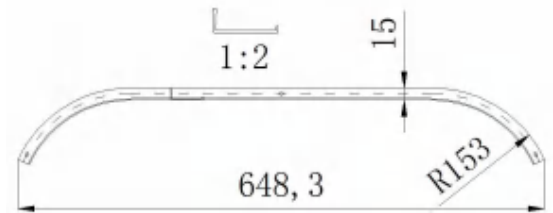

### Specification parameters

Specifications can be customized according to customer requirements.

### Product Features and Main Functions

**Rain chute:** High-quality aluminum alloy profile, powder spraying.

**Color:** The general color is white.

**Installation:** Install the rain chute above the door of the RV.

**Main functions:** The upper edge of the RV door guides the rainwater to improve the sealing stability of the RV door. The rain guide groove is easy to install.



# 房车爬梯&铝封边条

## 房车爬梯

### 产品图片



### 规格参数

规格可根据用户要求协商定制。

W: 爬梯的宽, 单位mm;

H: 爬梯的高, 单位mm。

### 产品特点及主要功能

**梯架:** 高强度铝合金型材, 粉末喷涂。

**爬梯颜色:** 常规颜色为白色、黑色。

**安装:** 用螺钉固定安装在车身恰当位置。

**主要功能:** 方便人员上下车顶, 承重可达 200KG, 经久耐用, 长时间使用不会变形。该爬梯结构轻巧, 安装使用简便。

## 铝封边条

### 产品图片



### 规格参数

规格可根据客户要求协商定制。封边条的长度、弯角等

### 产品特点及主要功能

**铝封边条:** 高强度铝合金型材, 粉末喷涂。

**铝条颜色:** 常规颜色为白色、黑色。

**安装:** 将封边条安装于房车顶面与侧面拼接处。

**主要功能:** 此件用作房车顶面与侧面拼接处收边用, 同时具备密封与美观功能, 安装方便。



# RV ladder&aluminum Article sealing side

## RV ladder

### Product pictures



### Specification parameters

Specifications can be negotiated and customized according to user requirements.

**W:** The width of the RV ladder, unit mm;

**H:** The height of the RV ladder, unit mm.

### Product Features and Main Functions

**RV Ladder:** High-quality aluminum alloy profiles, powder spraying.

**RV Ladder color:** The normal color is white and black.

**Mounting:** Screw mounted in proper position.

**Main functions:** It is convenient for people to get on and off the rv roof. The load bearing can reach 200KG. It is durable and will not be deformed for a long time. The ladder structure is light and easy to install and use.

## aluminum Article sealing side

### Product pictures



### Specification parameters

Specifications can be negotiated and customized according to customer requirements.

**The length, Angle, etc of the Article sealing side**

### Product Features and Main Functions

**Aluminum Article sealing side:** High-quality aluminum alloy profiles, powder coating.

**Color of aluminum strip:** White and black are the normal colors.

**Installation:** Install Article sealing side at the joint of the top and side of the RV.

**Main functions:** This piece is used as the top and side splicing part of the rV to draw the edge, and has the sealing and aesthetic function, easy to install.



# 弧形门


## 产品图片



## 产品细节



抗紫外线亚克力



高强度铝合金型材



安全认证单点锁

## 产品特点及主要功能

**门框：**高强度铝合金型材，颜色可以根据客户要求定制。

**门板：**白色抗紫外线复合夹芯板（其他颜色可定制）。

**门锁：**安全认证单点锁。

**玻璃：**抗紫外线亚克力玻璃。

**结构：**结构独特，该门具有开、关、锁、通风、透光、隔音、隔热和良好的防水性能。结构轻巧，安装使用简便，牢固耐用，型号多样

## 规格参数

规格可根据用户要求协商定制。

## 主要用途

适用于房车




## Product pictures



## Product features



UV - resistant acrylic



High-quality aluminum alloy



safety certified single point lock

## Specification parameters

Specifications can be customized according to user requirements.

## Main applications

RV

## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** custom color.

**Door panel:** White UV resistant composite sandwich panel (other colors can be customized).

**Glass:** UV resistant acrylic glass.

**Door lock:** safety certified single point lock.

**Structure:** Unique structure. The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Light structure, easy installation and use, firm and durable, and various models





# 房车对开门

## 产品图片



## 产品细节



安全认证单点锁



磨砂钢化玻璃  
抗紫外线亚克力



高强度铝合金型材  
粉末喷涂

## 产品特点及主要功能

**门框：**高强度铝合金型材，粉末喷涂；  
常规色为黑色、白色；  
也可以根据客户要求定制银灰色等。

**门板：**白色抗紫外线复合夹芯板(其他颜色可定制)。

**玻璃：**磨砂钢化玻璃或抗紫外线亚克力玻璃可供选择。

**门锁：**安全认证单点锁。

**结构：**结构独特，可以单独打开其中一扇门，也可以两扇门都打开；该门具有开、关、锁、通风、透光、隔音、隔热和良好的防水性能。结构轻巧，安装使用简便，牢固耐用，型号多样。

**可选项：**详见规格说明。

**可选件：**门吸。(可选件须单独订购)



## 主要用途

适合墙厚30-60mm的各类房车。

## 规格参数

规格可根据用户要求协商定制。

## 安装示意图

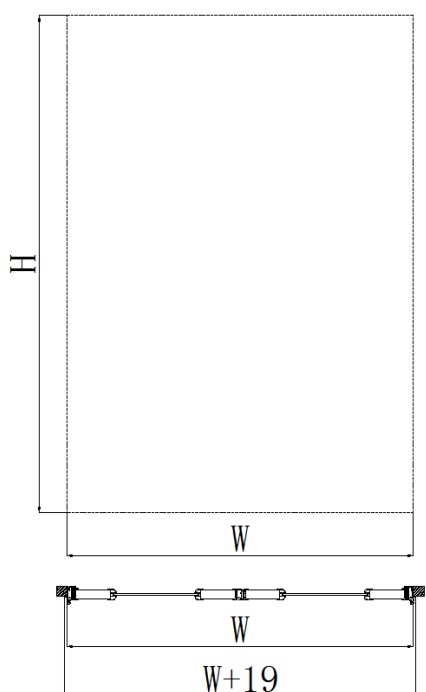



# RV Double-doors

## Product features



Frosted tempered glass  
UV - resistant acrylic



safety certified  
single point lock



High-quality  
aluminum alloy profile  
powder coating


## Product pictures



## Specification parameters

Specifications can be customized according to user requirements.

## Installation diagram

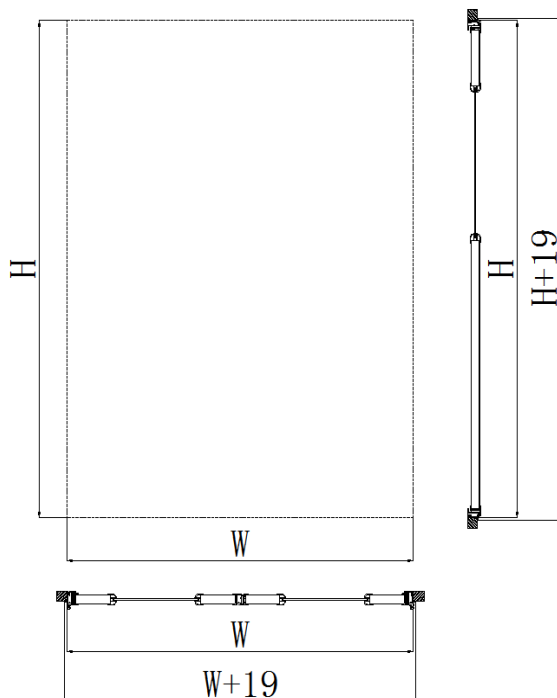

## Product Features and Main Functions

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Door panel:** White anti-ultraviolet composite sandwich panel (other colors can be customized);

**Glass:** Frosted tempered glass or UV - resistant acrylic sheet is available.

**Door lock:** Safety certified single point lock.

**Structure:** Unique structure, one door can be opened separately, or both doors can open; The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, and various models.

**Optional:** see specification for details.

**Optional parts:** Door Stop.  
(Optional items must be ordered separately)

## Main applications

Suitable for RV with wall thickness of 30-60mm.




# 房车进水口舱盖

## 产品图片



## 规格参数

### FEATURES & BENEFITS 特征和优点


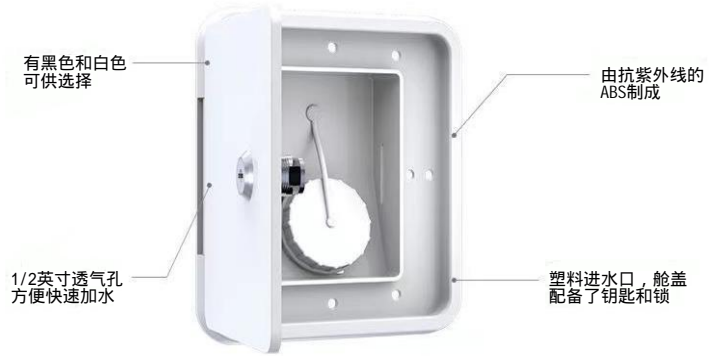


型号	L1 (mm)	W1 (mm)	L2 (mm)	W2 (mm)	颜色
SFWH1-151-166-01	151mm	166mm	108.5mm	76.5mm	白色
SFWH2-151-166-01	151mm	166mm	108.5mm	76.5mm	黑色
SFWH1-193-164-02	193mm	164.5mm	148mm	119mm	白色
SFWH2-193-164-02	193mm	164.5mm	148mm	119mm	黑色

## 产品特点及主要功能

1. 进水口舱盖同时配备了两把钥匙及安装螺丝和胶垫
2. 进水口舱盖采用优质的抗老化ABS塑料，特别添加抗紫外线成分延长使用寿命
3. 本产品是重力塑料加水口舱盖，1/2英寸出气孔可以保证快速加水
- 4：不锈钢护链安全锁，安全且放心

## 安装示意图

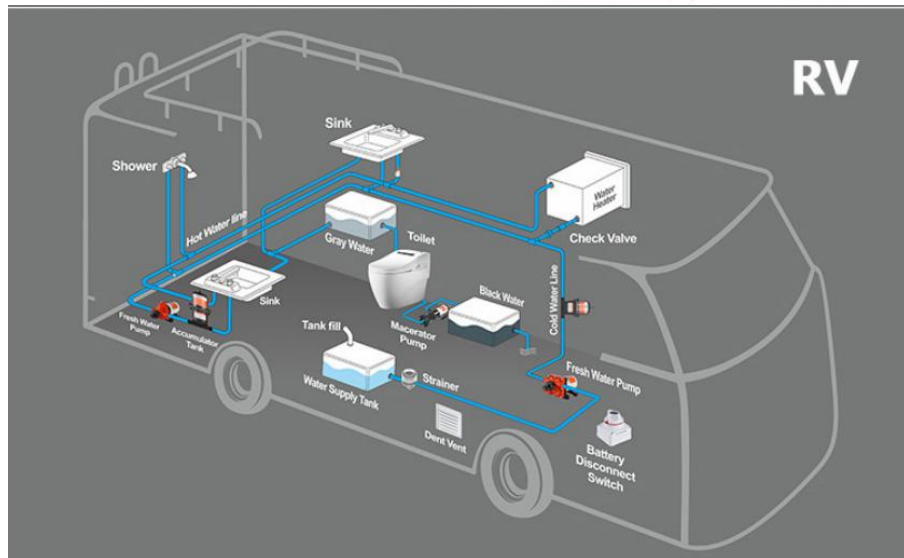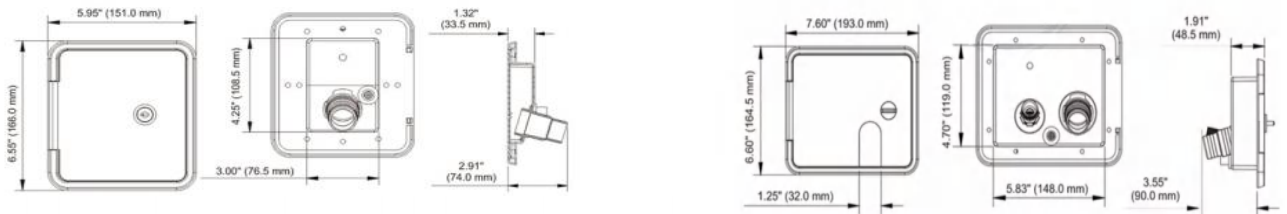

# RV Water Inlet Hatch



Taizhou Tongfa Automobile Fitting Co., Ltd.  
 泰州市同发汽车配件有限公司

## Product pictures



## Specification parameters




Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-151-166-01	5.94"(151mm)	6.54"(166mm)	4.27"(108.5mm)	3.01"(76.5mm)	white
SFWH1-151-166-01	5.94"(151mm)	6.54"(166mm)	4.27"(108.5mm)	3.01"(76.5mm)	black
SFWH1-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	white
SFWH2-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	black

## Product Features and Main Functions

1. Quick and easy to install, keep it beautiful.
2. Using UV resistant materials.
3. Tighten the screw with a screwdriver.

## Installation diagram

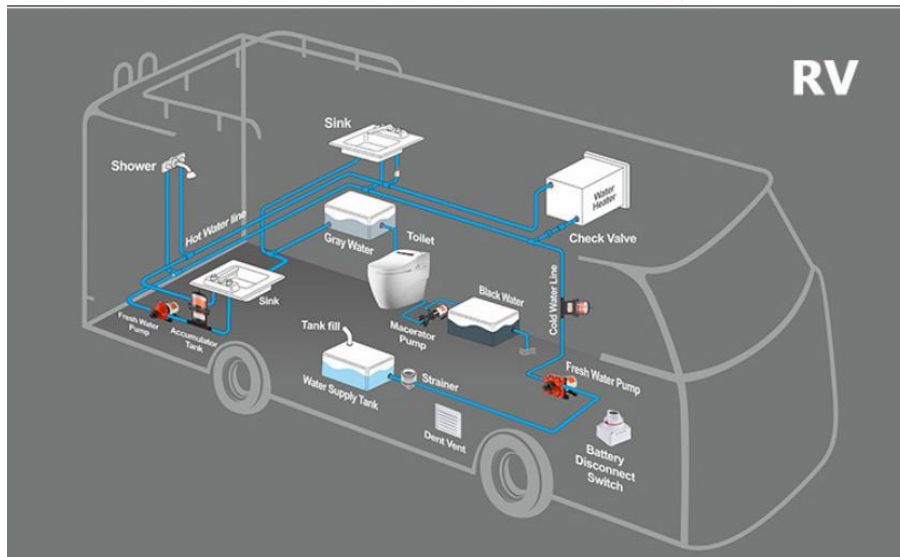



# 军用方舱门窗

## 军用方舱窗

产品图片



### 产品特点及主要功能

**窗框：**高强度铝合金型材；

**窗框颜色：**铝合金本色

**玻璃：**双层中空钢化玻璃；

**纱帘：**高强度玻璃纤维纱帘和遮光布帘。

**开启：**窗户装有支撑杆，可以外推，最大可开启65度。

**主要功能：**该窗户具有开、关、通风、透光、遮阳、防蚊虫、隔音、隔热、私密性等功能和良好的防水性能。当纱帘和窗户打开后可用作紧急出口（小窗户除外）。结构轻巧，安装使用简便，牢固耐用，型号多样；更适合越野等需求。

### 规格参数

规格可根据用户要求协商定制。

### 主要用途

适用于墙厚50mm的房车，其他墙厚尺寸也可定制



## 军用方舱门

### 产品特点及主要功能

**门框：**高强度铝合金型材；

**门板：**高强度铝板；

**玻璃：**双层中空钢化玻璃固定窗；

**门锁：**安全认证双点锁。  
可升级定制中控锁，密码锁，人脸识别功能

**结构：**该门具有开、关、锁、通风、透光、隔音、隔热和良好的防水性能。  
结构轻巧，安装使用简便，牢固耐用，型号多样。

**可选项：**详见规格说明。

**可选件：**门吸。（可选件须单独订购）

**规格参数** 规格可根据用户要求协商定制。

**主要用途** 适用于墙厚50mm的房车，其他墙厚尺寸也可定制

产品图片





# Military shelter doors and windows

## Military shelter windows

### Product pictures



**Window frame:** High-quality aluminum alloy profile;

**Window frame color:** Aluminum alloy natural color;

**Glass:** Double hollow tempered glass;

**Gauze curtain:** High-quality glass fiber gauze curtain and blackout cloth curtain.

**Opening:** The window is equipped with a support rod, which can be pushed outward, and can be opened up to 65 degrees.

**Main functions:** The window has the functions of opening, closing, ventilation, light transmission, sunshade, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When the screen curtain and window are opened, they can be used as emergency exits (except for small windows). Lightweight structure, easy installation and use, firm and durable, and various models. More suitable for off-road and other needs

### Specification parameters

Specifications can be customized according to user requirements.

### Main applications

Applicable to RV with wall thickness of 50mm, other wall thickness sizes can also be customized



## Military shelter Doors

**Door frame:** High-quality aluminum alloy profile;

**Door plate:** High-quality aluminum plate;

**Glass:** Double hollow tempered glass fixed window;

**Door lock:** safety certification two-point lock. Upgradeable customized central lock, password lock, face recognition function

**Structure:** The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, and various models.

**Optional:** See the specification for details.

**Optional:** Door stopper. (Optional parts must be ordered separately)

### Product pictures



### Specification parameters

Specifications can be customized according to user requirements.

### Main applications

Applicable to RV with wall thickness of 50mm, other wall thickness sizes can also be customized



# 运马车车门车窗

## 运马车车窗

### 产品特点及主要功能

**窗框：**高强度铝合金型材，粉末喷涂。  
常规色为黑色、白色，  
也可以根据客户要求定制银灰色。

**玻璃：**茶色PC板。

**窗锁：**月牙锁，安装于外侧。

**纱窗：**单侧内置纱窗。

**开启：**推拉式开启，单侧玻璃可推拉。

**主要功能：**该窗户具有透光、防蚊虫、隔音、隔热和良好的防水性能。本推拉窗采用自攻螺钉夹墙固定，安装使用简便，结构轻巧牢固耐用，型号多样。

### 规格参数


规格可根据用户要求协商定制。

### 主要用途

适用于运马车和房车



## 产品图片



运马车车窗

## 运马车车门

### 产品特点及主要功能

**门框：**高强度铝合金型材，粉末喷涂；  
常规色为黑色、白色；  
也可以根据客户要求定制银灰色等。

**门板：**白色抗紫外线复合夹芯板（其他颜色可定制）。

**玻璃：**磨砂钢化玻璃或抗紫外线亚克力玻璃可供选择；  
也可无玻璃。

**门锁：**安全认证单点锁；  
可定制门锁。

**结构：**结构独特，该门具有开、关、锁、通风、透光、隔音、隔热和良好的防水性能。结构轻巧，安装使用简便，牢固耐用，型号多样。

**可选项：**详见规格说明。

**可选件：**门吸。（可选件须单独订购）

### 规格参数

规格可根据用户要求协商定制。

### 主要用途

适用于运马车和房车

## 产品图片



运马车车门





# Horse trailer doors and windows

## Horse trailer window

**Window frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Glass:** Tawny PC board.

**Gauze curtain:** One side built-in screen window.

**Window lock:** crescent lock, installed on the outside.

**Open:** Push-pull type open, one side glass can push pull.

**Main function:** The window has light transmission, mosquito proof, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

## Product pictures



## Specification parameters

Specifications can be customized according to user requirements.

## Main applications

Applicable to RV and Horse trailer



Horse trailer window



## Horse trailer door

**Door frame:** High-quality aluminum alloy profile, powder coating.

**Normal colors:** black and white;

**Customized colors:** silver grey, etc.

**Door panel:** white anti-ultraviolet composite sandwich panel (other colors can be customized).

**Glass:** Frosted tempered glass or UV - resistant acrylic sheet is available.

**Aluminum mesh:** high strength aluminum mesh.

**Gauze curtain:** high strength glass fiber curtain.

**Door lock:** safety certified single point lock.

Other locks can also be customized

**Optional:** see specification for details.

**Optional parts:** Door Stop.(Optional items must be ordered separately)

**Main function:** The door has opening, closing, locking, ventilation, light transmission, mosquito proof, sound insulation, heat insulation and good waterproof performance. Light structure, easy to install and use, firm and durable, various models.

## Product pictures



Horse trailer door



## Specification parameters

Specifications can be customized according to user requirements.

## Main applications

Applicable to RV and Horse trailer





# 特种车辆车窗

## 产品图片


大巴车窗



高速收费亭窗



中巴车窗

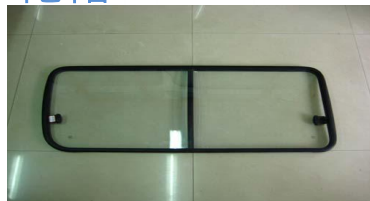

特种机械



观光车立柱



新型考拉警车封闭



电动车车门车窗



规格参数：按需定制



# Special vehicle windows

## Product pictures

Large Bus window



Expressway toll booth window



Medium-sized Bus window



Special machinery



Sightseeing bus column



Small police car frame




Electric vehicle Door, window



## Specification parameters

Customize products according to your needs

# 企业资质 Enterprise qualification



## 企业质量方针 Enterprise quality policy

客户至上，奋斗为基  
Customer first, strive for the base  
质量为本，开心共赢  
Quality-oriented, win-win cooperation.

## 企业愿景 Enterprise vision

匠心成就您的美好生活  
Focus on achieving your better life

## 企业使命 Corporate mission

至诚至信，合作共赢  
Sincerity to letter, win-win cooperation

## 企业核心价值观 Company Core Values

务实奋进，以人为本  
Pragmatic forge ahead, people-oriented  
开拓创新，客户为先  
pioneering and innovative, customer first.

# TONGFA

泰州市同发汽车配件有限公司

Taizhou Tongfa Automobile Fitting Co.,Ltd

地址：江苏省泰州市海陵区鲍徐路2号

Address: No. 2, Baoxu Road, Hailing District, Taizhou, Jiangsu Province

电话：0523-86847149


Tel：0523-86847149

手机：18052677777

Phone：18052677777

网址：www.tz-tongfa.com

Web：www.tz-tongfa.com



关注抖音，了解更多

Pay attention to Tiktok and learn more



扫一扫，添加微信  
Scan to add WeChat