

TONGFA

泰州市同发汽车配件有限公司

Taizhou Tongfa Automobile Fitting Co.,Ltd



>> 2023.03

JIANGSU TAIZHOU



公司简介

Company Introduction

泰州市同发汽车配件有限公司成立于2009年，公司位于有着“水陆要津，咽喉据郡”之称的苏中门户-泰州；公司位置水陆交通便捷，环境优雅。“专业”源自于“坚持”，‘同发’作为国内第一批从事房车配件研发与生产的企业，多年如一日的专注让我们深耕于房车行业。

公司现有260余名员工，拥有较强的生产制造能力；专业技术研发人员达20余名，不断推陈出新，把更好的产品带给我们的客户；专业的质检部门严格把关，保证产品质量。多年来，公司创建了完善的质量控制服务体系；不光通过ISO9001质量管理体系认证，还通过了E-MARK欧盟认证等多项认证。

我们秉承“客户至上，奋斗为基；质量为本，齐心共赢”的企业方针；树立“务实奋进，以人为本；开拓创新，客户为先”的企业核心价值观；将“至诚至信，合作共赢”的企业使命贯彻到底；“匠心成就您的美好生活”是我们一直以来的企业愿景。

公司目前拥有国内较为先进的完整生产线，专业从事房车配件的设计、研发和生产制造；公司产品涵盖房车门、房车窗、房车储物门、房车舱储物门、房车天窗、房车踏步、房车小餐桌、房车通风换气扇、房车淋浴门、皮卡车窗、特种车辆车窗等；公司目前与国内外多家公司达成友好合作关系，其中包括澳大利亚、韩国、日本、美国、法国、德国、英国、土耳其等多个国家和地区。公司目前拥有多项相关行业专利，专业和服务赢得了很多国内外客户的认可与支持。

我司丰富的经验以及良好的产品质量收到了各界客户的广泛认可。

我公司愿与国内外各界同仁竭诚合作，共创未来！

我们竭诚欢迎各界人士来厂参观洽谈！

Taizhou Tongfa Automobile Fitting Co.,Ltd. was established in 2009, the company is located in Taizhou, the gateway of central Jiangsu Province, which is known as "the key to land and water, the throat of the county"; the location of the company has convenient land and water transportation and elegant environment.

The company has more than 260 employees, with strong manufacturing capacity; Technical Product developer & Engineer of more than 20, constantly pushing out new ideas to bring better products to our customers; professional quality control department strictly to ensure product quality.

We are adhering to the enterprise policy of "customer first, struggle-based; quality-oriented, win-win"; establishing the enterprise core values of "pragmatic and progressive, people-oriented; pioneering and innovative, customer first"; the enterprise mission of "sincerity and trust, win-win cooperation". The mission of "Sincerity, Cooperation and Win-win" is carried out to the end; "Craftsmanship to achieve your high quality life" is our corporate vision all along.

The company currently has a more advanced and complete production line, specializing in the design, development and manufacture of RV accessories; our products include RV doors, RV windows, RV storage doors, RV cabin storage doors, RV skylights, RV steps, RV small dining tables, RV ventilation fans, RV shower doors, pickup truck windows, special vehicle windows, etc.; We have established good business relationships with many partners, including Australia, Korea, Japan, the United States, France, Germany, the United Kingdom, Turkey and other countries and regions. etc. Our rich experience and good quality of products have been widely recognized by customers from all walks of life.

We will provide good communication and willing to establish a long-term cooperative relationship with you.

Our goal is to create a better future altogether. We sincerely welcome (you) people from all around the world to visit our factory.



泰州市同发汽车配件有限公司
Taizhou Tongfa Automobile Fitting Co.,Ltd.

目 录

Contents

房车门系列/RV Door Series

SLD单点锁房车门	SLD Single point lock RV Door	01
ELD刷卡锁房车门	ELD electronic card lock RV Door	02
DLD房车门	DLD RV Door	03
TLD三联房车门	TLD Three point linkage lock RV Door	04
SLD水滴门	Teardrop RV Door	05
SLD拖挂式房车门	Trailer Door	06
ELD单点刷卡锁门	Single point electronic card lock RV Door	07
ELD单点密码锁门	Single point password lock RV Door	08

房车窗系列/RV Window Series

SW固定窗	SW Fixed window	09
SW推拉窗	SW Sliding window	10
SW双层推拉窗	SW Double Sliding window	11
HW双层外推窗 (圆角)	HW Double Tophung Hinged window (rounded corners)	12
HW双层外推窗 (方角)	HW Double Tophung Hinged window (right angle)	13
HW外推窗 (圆角单层钢化)	HW Tophung Hinged window (rounded corner single Toughened glass)	14
SW推拉窗 (单侧内置纱窗)	Sliding window (one side built-in screen window)	15
SW提升窗	RV Vertical Sliding window	16
VENT通风排气扇	VENT exhaust fan	17
VENT换气扇	VENT Ventilator	18
HW弧形外推窗	RV Arc Tophung Hinged window	19
SK房车天窗	RV Skylight	20
SK房车天窗 (遥控灯光)	RV Skylight (remote control light)	21
SK前额天窗	RV Curved Skylight	22
SK星空窗	Starry sky window	23
SK帐篷天窗	Tent skylight	24

踏步系列/RV Step Series

MS-F手动 单层(S)折叠踏步	MS-F manual folding Single step	25
MS-F手动 双层(D)折叠踏步	MS-F manual folding Double step	26
MS-F电动 折叠踏步(E)	MS-F Electric folding RV step	27

储物门、仓储门系列/Storage door、warehousing door series

HD储物门	HD Storage door	28
BD房车仓储门	BD RV warehousing door	29

目 录

Contents

皮卡车窗系列/Pickup truck window series

SW皮卡前推拉窗	Pickup sliding window	30
SW皮卡后推拉窗	Pickup sliding window	31
HW皮卡大外推窗	Pickup Tophung Hinged window	32
HW皮卡侧外推窗	Pickup Tophung Hinged window	33

无框房车窗系列/Frameless RV window series

HW无框房车窗	Frameless RV window	34
---------	---------------------	----

配件系列/Accessories series

RV房车餐桌	RV Table	35
RV房车淋浴门	RV Shower Door	36
RV 浴室卷帘门	Bathroom sliding door	37
RV铝板 (RV车外身装饰铝板)	Aluminum plate (Aluminum body decoration)	38
RV导雨槽	Guide the rain trough	38
RV房车爬梯	RV ladder	39
RV铝封边条	Aluminum Article sealing side	39

特殊房车门系列/Arc RV door series

弧形房车RV门	Arc RV door	40
房车RV对开门	RV Double-doors	41

房车进水口舱盖系列/RV water inlet hatch cover series

RV进水口舱盖	RV water inlet hatch	42
RV 加油口	RV refueling port	43

特种车辆系列/Special vehicle series

越野房车门窗WD	OR-RV doors and windows	44
越野房车储物门	OR-RV Storage door	45
运马车门窗WD	Horse trailer doors and windows	46
SV特种车辆车窗	Special vehicle windows	47



SLD Single point lock RV Door



High-quality aluminum alloy profile powder coating




High-quality aluminum mesh
High-quality Fiberglass sheer



safety certified single point lock



Frosted tempered glass
UV - resistant acrylic

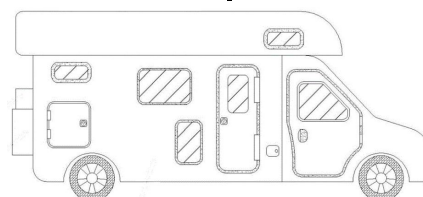

Trailer RV and self-propelled RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: white anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass

UV - resistant acrylic glass. (Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: safety certified single point lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.


Optional: see specification for details.

Optional parts: Door Stop. (Optional items must be ordered separately)


Main applications

Trailer RV and self-propelled RV, suitable for wall thickness of 30~60mm.

Installation diagram



Opening size:

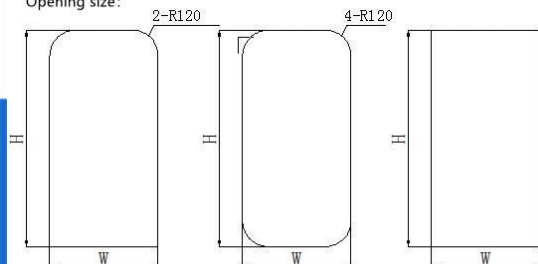

Door stop

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

2R L Black

SLD-W-H- 4R - - White

4S R Silver gray (custom)

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : Color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door stop

(Optional items must be ordered separately)





ELD electronic card lock RV Door




High-quality aluminum alloy profile powder coating




High-quality aluminum mesh High-quality Fiberglass sheer



security certification electronic card lock



Frosted tempered glass UV - resistant acrylic



Camp type trailer RV special

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass

UV - resistant acrylic glass. (Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: security certification electronic card lock, hotel type management.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Optional parts: Door Stop. (Optional items must be ordered separately)

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.



W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Main applications

Camp type trailer RV special, suitable for wall thickness of 30~60mm.

Installation diagram

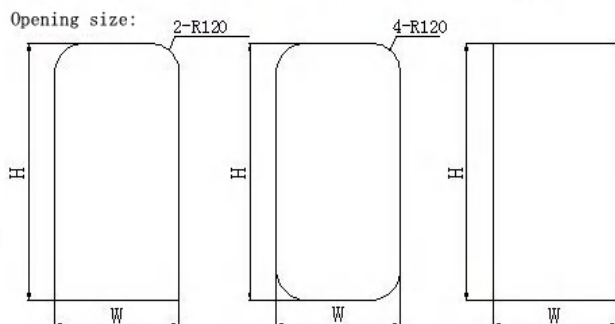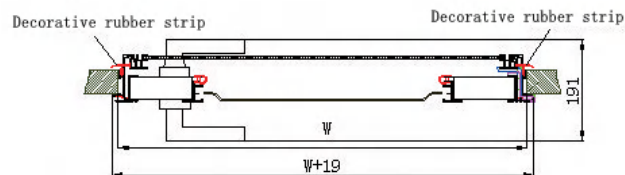

Specification

2R L Black

ELD-W-H- 4R - - White

4S R Silver gray (custom)

ELD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop.


(Optional items must be ordered separately)



Door stop



DLD RV Door

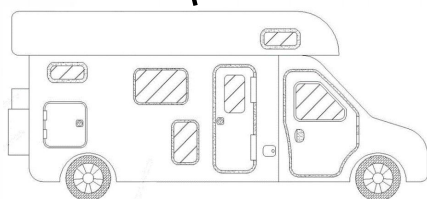

Trailer and self-propelled RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Custom colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Automotive grade black privacy safety glass (3C certified).

Screen door: Black Folding screen door.

Door lock: Imported double point lock.

Structure: The door with garbage can, handle, with open, close, lock, ventilation, light, insect prevention, sound insulation, heat insulation and good waterproof performance. The structure is light, easy to install and use, firm and durable.

Optional: see specification for details.

Optional parts: Door Stop. (Optional items must be ordered separately)

Main applications

Trailer and self-propelled RV, suitable for wall thickness of 30-90mm



High-quality aluminum alloy profile powder coating



Automotive grade black privacy safety glass (3C certified).



trash bin



Double point lock

Specification

Black

DLD-W-H- 4R -R- White

Silver gray (custom)

DLD: Specifications and models of doors

4R : Door with four rounded corners

R : The hinge is on the right side of the door

Black/White/Silver gray : color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop.

(Optional items must be ordered separately)

Specification parameters


Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
600-1810	626-1836	600-1810

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Installation diagram

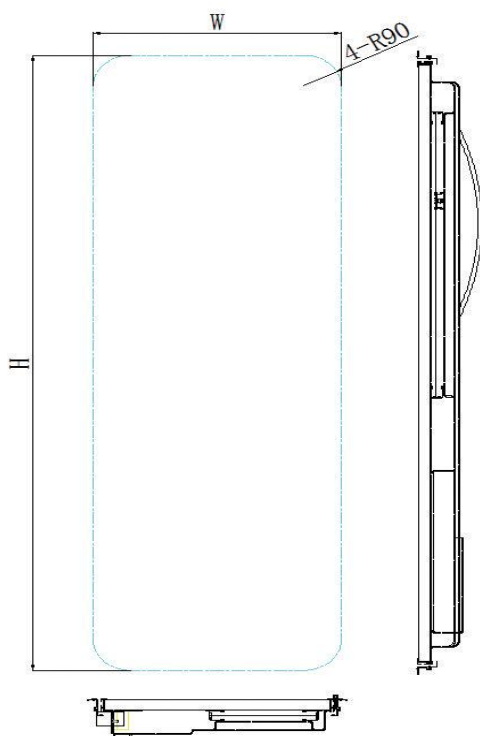

Door stop :



Stainless steel trash can :





TLD Three point linkage lock RV Door



Trailer and self-propelled RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Uv - resistant acrylic glass.

Aluminum mesh: High-quality aluminum mesh
304 stainless steel diamond mesh.
(Optional)

Gauze curtain: High-quality Fiberglass sheer.

Air vent: Plastic labyrinth air vent is both ventilated and dustproof

Door lock: Unique three-point linkage lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Optional parts: Door Stop.

(Optional items must be ordered separately)

Main applications

Trailer and self-propelled RV. Suitable for wall thickness of 30mm - 40mm

Specification

2R L Black

TLD-W-H- 4R - - White

4S R Silver gray (custom)

TLD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : Color of door frame

Air vents should be specified

Accessories : Decorative rubber strip.

Optional parts : Door Stop.

(Optional items must be ordered separately)

Specification parameters



Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
625-1750	644-1769	625-1750
630-1630	649-1649	630-1630
630-1435	649-1454	630-1435

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Installation diagram

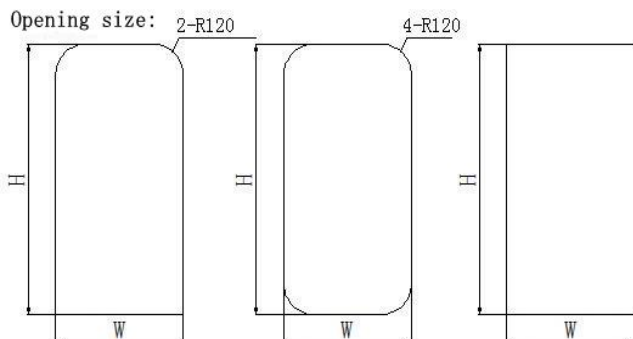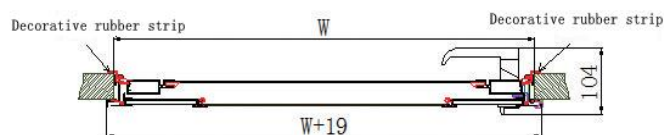


Door Stop:





Teardrop RV Door

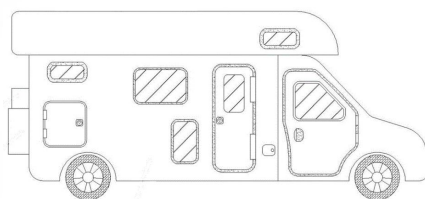

Trailer and self-propelled RV



High-quality aluminum alloy profile powder coating



High-quality aluminum mesh
High-quality Fiberglass sheer



safety certified
single point lock



Frosted tempered glass
UV - resistant acrylic



Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass

UV - resistant acrylic glass. (Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: safety certified single point lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Optional parts: Door Stop. (Optional items must be ordered separately)

Main applications

Trailer RV and self-propelled RV, suitable for wall thickness of 30~60mm.

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

L Black

SLD-W-H- 4R - - White

R Silver gray (custom)

SLD: Specifications and models of doors

4R : A door with four rounded corners

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door


Black/White/Silver gray : Color of door frame

Accessories : Decorative rubber strip.


Optional parts : Door stop

(Optional items must be ordered separately)

Door stop:

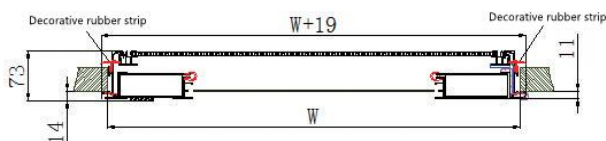

Opening size:





Trailer Door



Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
650-900	669-919	650-900

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

2R L Black
SLD-W-H- 4R - - White
4S R Silver gray (custom)

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : Color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door stop

(Optional items must be ordered separately)

Toughened glass lifting window : Door stop :



Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass

UV - resistant acrylic glass.

Toughened glass lifting window(Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: safety certified single point lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.


Optional: see specification for details.

Optional parts: Door Stop.(Optional items must be ordered separately)

Main applications

Trailer, suitable for wall thickness of 30~60mm.

Installation diagram

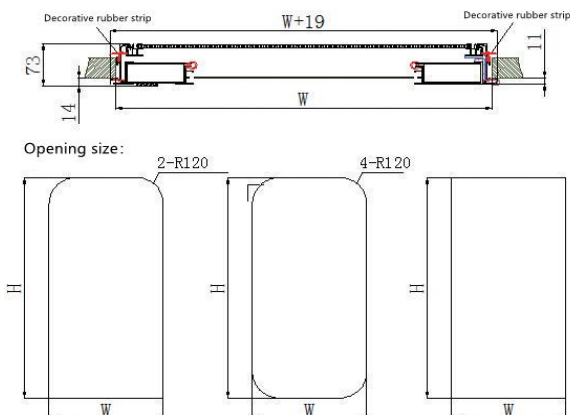



Single point electronic card lock RV Door



Camp type trailer special



High-quality aluminum alloy profile powder coating



High-quality aluminum mesh High-quality Fiberglass sheer



Frosted tempered glass UV - resistant acrylic



Single point electronic card lock

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

2R L Black

ELD-W-H- 4R - - White

4S R Silver gray (custom)

ELD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door

Black/White/Silver gray : color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop.

(Optional items must be ordered separately)

Door Stop:



Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass

UV - resistant acrylic glass.

Toughened glass lifting window(**Optional**)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: Single point electronic card lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.



Optional: see specification for details.

Optional parts: Door Stop. (Optional items must be ordered separately)

Main applications

Camp type trailer special, suitable for wall thickness of 30~60mm.

Installation diagram

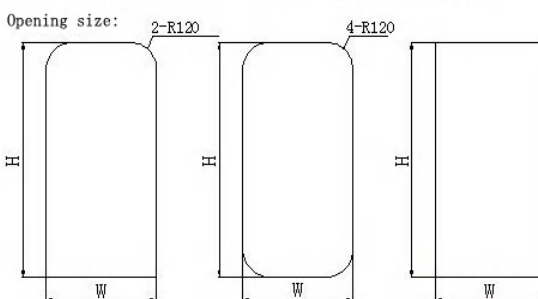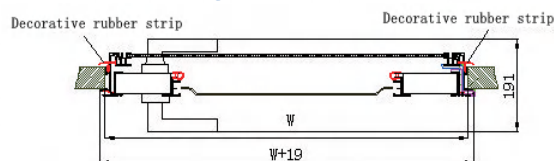



Single point password lock RV Door

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Screen printed tempered glass.

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: Single point password lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.



Optional parts: Door Stop.

(Optional items must be ordered separately)

Main applications

Camp type trailer special, suitable for wall thickness of 30~60mm.

Installation diagram

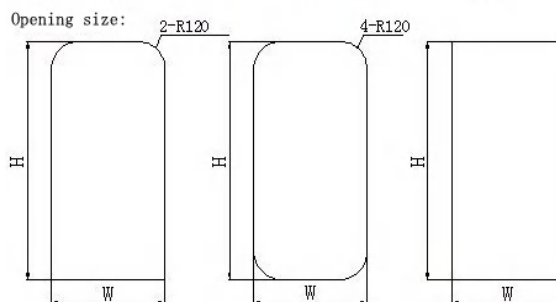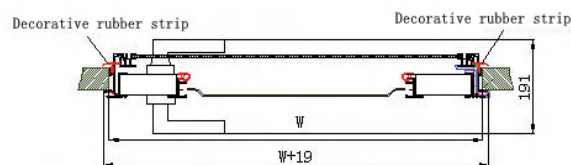

Camp type trailer special



High strength aluminum alloy profile powder coating



High strength aluminum mesh High strength glass fiber curtain



Frosted tempered glass UV-resistant acrylic



Single point password lock

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

2R L Black

ELD-W-H- 4R - - White

4S R Silver gray (custom)

ELD: Specifications and models of doors

2R: A door with two rounded corners

4R : A door with four rounded corners

4S : A door with four right Angle

L: The hinges are on the left side of the door

R : The hinge is on the right side of the door


Black/White/Silver gray : color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop.

(Optional items must be ordered separately)

Door Stop:





SW Fixed window



Specification parameters

Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W)-(H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Glass: 4mm toughened glass (certified for safety) or single layer UV resistant acrylic glass.

Gauze curtain: High-quality glass fiber gauze curtain and shading curtain integration.(optional)

Open: Fixed window, not open.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.


Options: Integration of high-strength glass fiber gauze curtain and shading curtain.



Push up: Open the high-strength glass fiber gauze curtain.

Pull down: Open the shade

Installation diagram

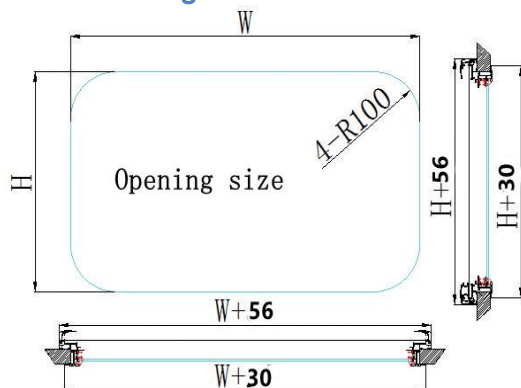

Main applications

Used in Rv .


Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness:30-90mm.

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

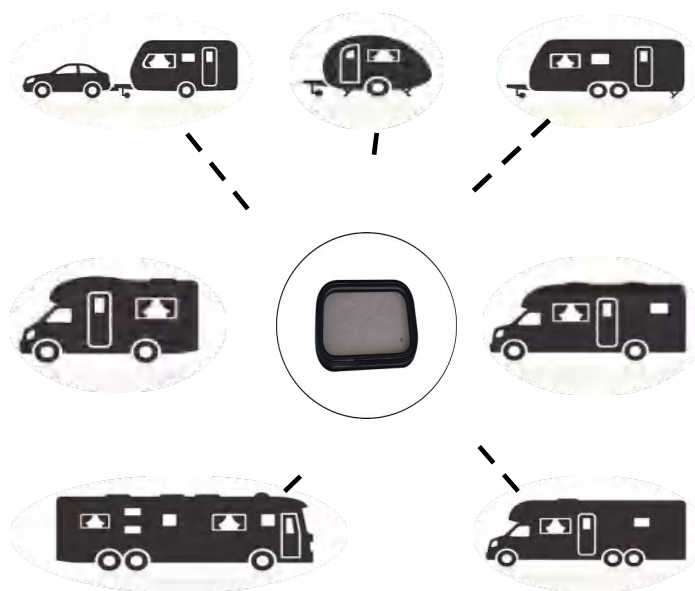

Applicable to all types of RV



SW Sliding window



Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Glass: 4mm toughened glass (certified for safety)

Single layer UV resistant acrylic glass. (optional)

Gauze curtain: High-quality glass fiber gauze curtain and Shading curtain integration. (optional)

Open: push-pull type open, one side glass can push pull.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.



4mm toughened glass
(certified for safety)
Single layer
UV resistant acrylic glass



High-quality glass fiber
Gauze curtain
Shading curtain integration



High-quality
Aluminum alloy profile,
Powder coating

Main applications

Used in Rv .

Different installation frames are suitable for different wall thicknesses;
Total applicable range of wall thickness: 30-90mm.

Specification parameters



Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W)-(H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

Installation diagram

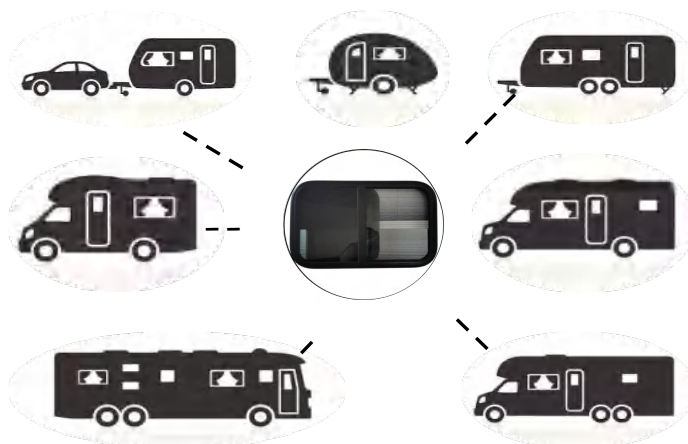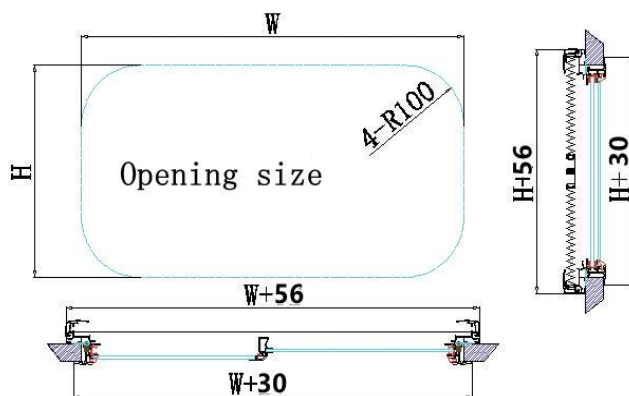

Applicable to all types of RV



SW Double Sliding window



High-quality
Aluminum alloy profile,
Powder coating



Double layer UV
resistant acrylic



High-quality glass fiber
Gauze curtain
Shading curtain integration

Specification parameters


Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W)-(H)
700-500	730-530	700-500
800-450	830-480	800-450
900-500	930-530	900-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

Installation diagram

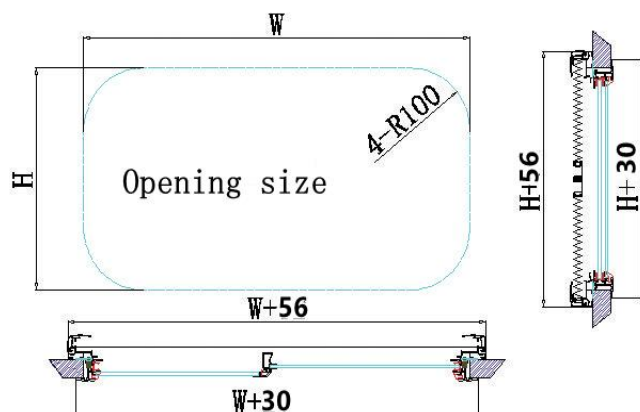

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Glass: Double layer UV resistant acrylic glass.

Gauze curtain: High-quality glass fiber gauze curtain and Shading curtain integration.(optional)

Open: push-pull type open, one side glass can push pull..



Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



Used in RV or buildings



HW double Tophung Hinged window (Rounded corners)



High-quality
Aluminum alloy profile,
Powder coating



Support bar



Double layer UV
resistant acrylic



High-quality glass fiber
Gauze curtain
Shading curtain integration



Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** silver grey, etc.

Glass: Double layer uv - resistant acrylic glass.

Gauze curtain: High-quality fiberglass curtain and shading curtain.

Open: The window is equipped with a support rod, which can be pushed to open two angles, and can open up to 65 degrees.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, shading, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

Main applications


Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;


Total applicable range of wall thickness: 30-80mm.



Used in RV or buildings



Installation diagram

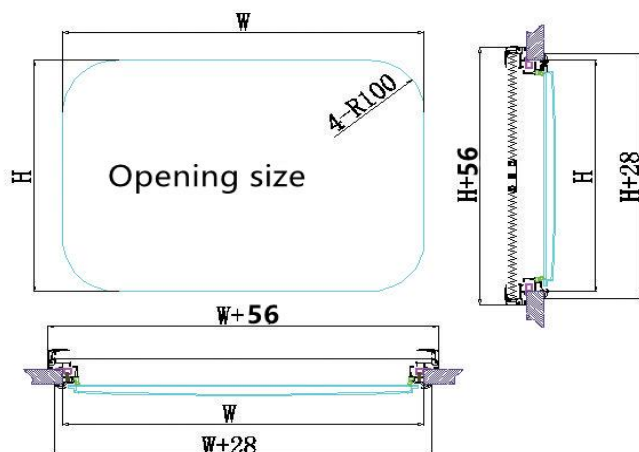

Specification parameters

Regular Size W-H	Product Size/mm (W+28)-(H+28)	Cutout Size/mm (W)-(H)
400-300	428-328	400-300
500-300	528-328	500-300
500-350	528-378	500-350
500-400	528-428	500-400
500-450	528-478	500-450
500-500	528-528	500-500
550-400	578-428	550-400
550-500	578-528	550-500
600-300	628-328	600-300
600-350	628-378	600-350
600-450	628-478	600-450
600-500	628-528	600-500
600-600	628-628	600-600
700-400	728-428	700-400
700-450	728-478	700-450
700-500	728-528	700-500
700-550	728-578	700-550
750-400	778-428	750-400
750-450	778-478	750-450
800-400	828-428	800-400
800-450	828-478	800-450
800-500	828-528	800-500
800-600	828-628	800-600
800-700	828-728	800-700
800-800	828-828	800-800
900-350	928-378	900-350
900-450	928-478	900-450
900-500	928-528	900-500
900-550	928-578	900-550
900-900	928-928	900-900
950-500	978-528	950-500
1000-450	1028-478	1000-450
1000-500	1028-528	1000-500
1000-600	1028-628	1000-600
1000-800	1028-828	1000-800
1100-450	1128-478	1100-450
1100-500	1128-528	1100-500
1100-550	1128-578	1100-550
1200-300	1228-328	1200-300
1200-350	1228-378	1200-350
1200-400	1228-428	1200-400
1200-500	1228-528	1200-500
1200-600	1228-628	1200-600
1220-705	1248-733	1220-705
1300-550	1328-578	1300-550
1450-500	1478-528	1450-500
1450-550	1478-578	1450-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;



HW double Tophung Hinged window (Right Angle)



High-quality
Aluminum alloy profile,
Powder coating



High-quality glass fiber
Gauze curtain
Shading curtain integration



Support bar



Double layer UV
resistant acrylic



Specification parameters

Regular Size W-H	Product Size/mm (W+50)-(H+50)	Cutout Size/mm (W) - (H)
350-280	400-330	350-280
400-300	450-350	400-300
500-300	550-350	500-300
500-350	550-400	500-350
500-400	550-450	500-400
500-450	550-500	500-450
500-500	550-550	500-500
550-400	600-450	550-400
550-500	600-550	550-500
600-300	650-350	600-300
600-350	650-400	600-350
600-450	650-500	600-450
600-500	650-550	600-500
600-600	650-650	600-600
700-400	750-450	700-400
700-450	750-500	700-450
700-500	750-550	700-500
700-550	750-600	700-550
750-400	800-450	750-400
750-450	800-500	750-450
800-400	850-450	800-400
800-450	850-500	800-450
800-500	850-550	800-500
800-600	850-650	800-600
800-700	850-750	800-700
800-800	850-850	800-800
900-350	950-400	900-350
900-450	950-500	900-450
900-500	950-550	900-500
900-550	950-600	900-550
900-900	950-950	900-900
950-500	1000-550	950-500
1000-450	1050-500	1000-450
1000-500	1050-550	1000-500
1000-600	1050-650	1000-600
1000-800	1050-850	1000-800
1100-450	1150-500	1100-450
1100-500	1150-550	1100-500
1100-550	1150-600	1100-550
1200-300	1250-350	1200-300
1200-350	1250-400	1200-350
1200-400	1250-450	1200-400
1200-500	1250-550	1200-500
1200-600	1250-650	1200-600
1220-705	1270-755	1220-705
1300-550	1350-600	1300-550
1450-500	1500-550	1450-500
1450-550	1500-600	1450-550

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** silver grey, etc.

Glass: Double layer uv - resistant acrylic glass.

Gauze curtain: High-quality fiberglass curtain and shading curtain.

Open: The window is equipped with a support rod, which can be pushed to open two angles, and can open up to 65 degrees.


Main functions: The window has the functions of opening, closing, ventilation, light transmission, shading, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

Main applications

Used in RV or buildings,


Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



Used in RV or buildings

Installation diagram

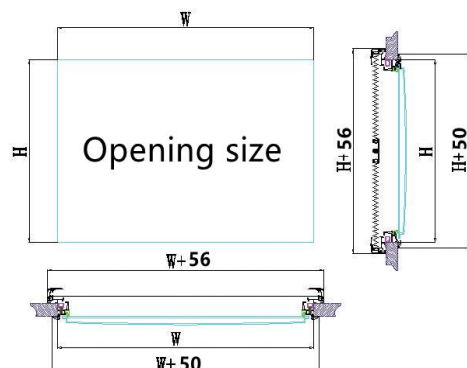

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;



HW Tophung Hinged window (rounded corner single Toughened glass)



High-quality
Aluminum alloy profile,
Powder coating



High-quality glass fiber
Gauze curtain
Shading curtain integration



single Toughened glass



Support bar



Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** silver grey, etc.

Glass: 4mm toughened glass (certified for safety)

Gauze curtain: High-quality fiberglass curtain and shading curtain.

Open: The window is equipped with a support rod, which can be pushed to open two angles, and can open up to 65 degrees.


Main function: The window has the functions of opening, closing, ventilation, light transmission, shading, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows).Light structure, easy to install and use, firm and durable, various models

Main applications

Used in RV or buildings,


Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



Used in RV or buildings

Installation diagram

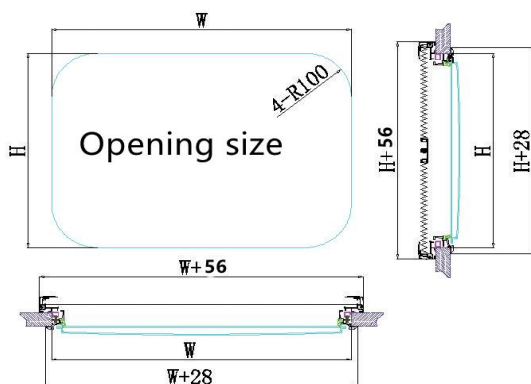

Specification parameters

Regular Size W-H	Product Size/mm (W+28)-(H+28)	Cutout Size/mm (W) - (H)
400-300	428-328	400-300
500-300	528-328	500-300
500-350	528-378	500-350
500-400	528-428	500-400
500-450	528-478	500-450
500-500	528-528	500-500
550-400	578-428	550-400
550-500	578-528	550-500
600-300	628-328	600-300
600-350	628-378	600-350
600-450	628-478	600-450
600-500	628-528	600-500
600-600	628-628	600-600
700-400	728-428	700-400
700-450	728-478	700-450
700-500	728-528	700-500
700-550	728-578	700-550
750-400	778-428	750-400
750-450	778-478	750-450
800-400	828-428	800-400
800-450	828-478	800-450
800-500	828-528	800-500
800-600	828-628	800-600
800-700	828-728	800-700
800-800	828-828	800-800
900-350	928-378	900-350
900-450	928-478	900-450
900-500	928-528	900-500
900-550	928-578	900-550
900-900	928-928	900-900
950-500	978-528	950-500
1000-450	1028-478	1000-450
1000-500	1028-528	1000-500
1000-600	1028-628	1000-600
1000-800	1028-828	1000-800
1100-450	1128-478	1100-450
1100-500	1128-528	1100-500
1100-550	1128-578	1100-550
1200-300	1228-328	1200-300
1200-350	1228-378	1200-350
1200-400	1228-428	1200-400
1200-500	1228-528	1200-500
1200-600	1228-628	1200-600
1220-705	1248-733	1220-705
1300-550	1328-578	1300-550
1450-500	1478-528	1450-500
1450-550	1478-578	1450-550

Specifications can be customized according to customer requirements

.W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface,unit mm ;



Sliding window (one side built-in screen window)

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black and white;

Customized colors: silver grey, etc.

Glass: 4mm toughened glass (certified for safety) .


Gauze curtain: One side built-in screen window

Open: Push-pull type open, one side glass can push pull.

Main function: The window has light transmission prevention Insect, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.



High-quality
Aluminum alloy profile,
Powder coating




One side built-in screen window



4mm single Toughened glass

Installation diagram

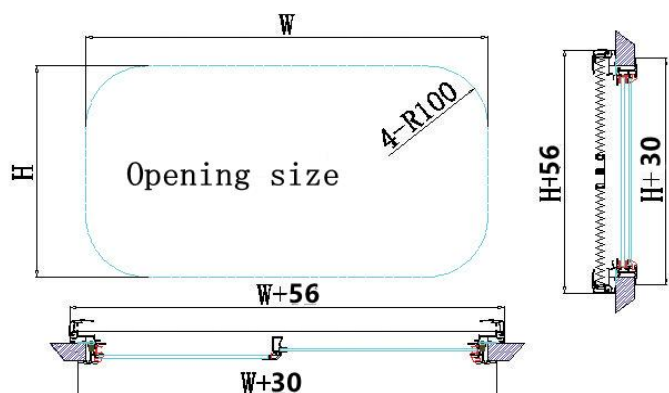


Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.

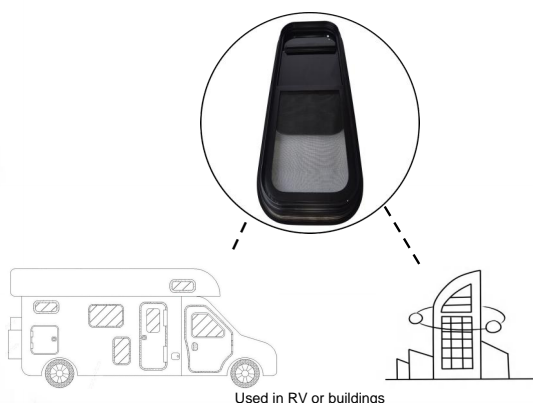

Specification parameters

Regular Size W-H	Product Size/mm (W+30) - (H+30)	Cutout Size/mm (W) - (H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;


H: Height of the Window mounting surface, unit mm;



RV Vertical Sliding window



High-quality
Aluminum alloy profile,
Powder coating



High-quality glass fiber
Gauze curtain
Shading curtain integration




4mm single Toughened glass




Main applications

Used in RV or buildings,
Different installation frames are suitable for different wall
thicknesses;
Total applicable range of wall thickness: 30-80mm.



Used in RV or buildings

Installation diagram

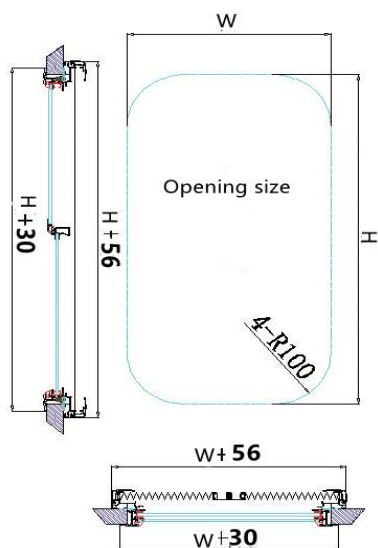

Specification parameters

Regular Size H-W	Product Size/mm (H+30) - (W+30)	Cutout Size/mm (H) - (W)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Specifications can be customized according to
customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles,
powder coating.

Normal colors : black and white; ,

Customized colors: silver grey, etc.

Glass: 4mm toughened glass (certified for safety) .

Gauze curtain: High-quality fiberglass curtain and shading curtain.

Open: Lift open, one side glass can lift.

Main function: The window has light transmission, Insect prevention ,
sound insulation, heat insulation and good waterproof
performance. The window is fixed by tapping screw
clamping wall, easy to install and use, lightweight
structure, firm and durable, various models.



VENT exhaust fan



Privacy transparent
lighting material






White anti-ULTRAVIOLET
ASA material



Gauze

Installation diagram

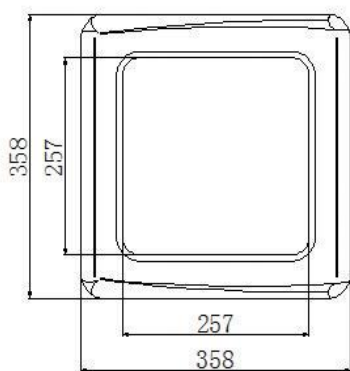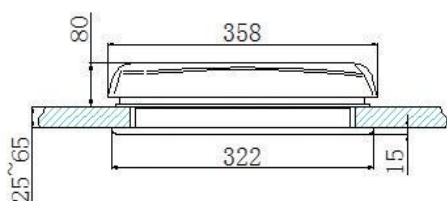

Specification parameters

Regular Size W-H	Product Size/mm (W+78) - (H+78)	Cutout Size/mm (W) - (H)
280-280	358-358	280-280

Specifications can be customized according to customer requirements.

W: Width of VENT exhaust fan mounting surface, unit mm;

H: Height of the VENT exhaust fan mounting surface, unit mm;

Main applications

RV and self-propelled trailers.

Suitable for wall thickness of 25-65mm.




Product Features and Main Functions

Fan body: White anti-ULTRAVIOLET ASA material,
Top of the exhaust fan : Private transparent lighting material

Motor: The newly developed 12V and 20W DC motor is equipped with temperature control system to prevent overheating of the motor from affecting its service life.

Use: Simply press a button and ventilator can provide fresh air (air intake) and ventilation (air exhaust) to the car. Rain and snow weather can be closed in the case of the cover, still achieve ventilation function.

Main function: The exhaust fan has the characteristics of opening, closing, locking, ventilation, light transmission, Insect prevention and good waterproof performance. Light structure, easy to install and use, firm and durable, various models.



RV and self-propelled trailers




VENT Ventilator



Resistant to yellowing
Engineering materials



Forward and reverse
Low noise motor



Stainless steel support rod



Insect screen



Manual/Electric Ventilator



Manual Ventilator

- Rain sensing: None
- Connect to remote panel: None
- One click window opening: None
- Size and air volume adjustment: None
- Remote control function: None
- Driving window closing: None
- Number of support rods: 1 piece
- High temperature automatic window opening: None
- In/out ventilation: Yes
- LED lighting: Optional



Electric Ventilator

- Rain sensing: Yes
- Connect to remote panel: Optional
- One click window opening: Yes
- Remote control function: Yes
- Size and air volume adjustment: Yes
- High temperature automatic window opening: Yes
- Driving window closing: Yes
- Number of support rods: 2piece
- In/out ventilation: Yes
- LED lighting: Yes

Specification parameters

Regular Size W-H	Product Size/mm (W+80) - (H+80)	Cutout Size/mm (W) - (H)
280-280	360-360	280-280
340-340	420-420	340-340
400-400	480-480	400-400

Specifications can be customized according to customer requirements.

W: Width of Ventilator mounting surface, unit mm;
H: Height of the Ventilator mounting surface, unit mm;

Main applications







Trailer and self-propelled RVs.
The applicable wall thickness is 38-95mm.
The standard installation thickness of the lifting frame is 50-95mm
The installation thickness that needs to be adjusted for the lifting frame is 38-50mm

Product Features and Main Functions

- Frame:** Yellow resistant engineering material with characteristics such as oxidation resistance and aging resistance,
- Insect screen:** It can effectively prevent mosquitoes, insects, sand, and stones from entering the interior of the RV.
- Motor:** Low decibel operation; When breathing, you can fall asleep peacefully; It can be ventilated by either exhaust or inlet.
- Support rod:** stainless steel support rod
- Main function:** The exhaust fan has the characteristics of opening, closing, locking, ventilation, light transmission, Insect prevention and good waterproof performance
Light structure, easy to install and use, firm and durable, various models.

Optional:
Manual: with/without light
Electric: with lights

Installation diagram





RV Arc Tophung Hinged window

Product pictures



Product features



Double layer UV
resistant acrylic



High-quality
Aluminum alloy profile,
Powder coating



support rod

Specification parameters

Regular Size W-H	Product Size/mm (W+56)-(H+54)	Cutout Size/mm (W)-(H)
280-380	336-434	280-380
490-500	546-554	490-500
600-450	656-504	600-450
750-455	806-504	750-455
818-315	874-365	818-315
900-400	956-454	900-400
900-450	956-504	900-450
985-465	1041-519	985-465
960-450	1016-504	960-450

Specifications can be negotiated and customized according to user requirements.

W: Width of window mounting surface, unit: mm;

H: Arc length height of window mounting surface, unit: mm.

Main applications

RV

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



Windows are suitable for special requirements of RV

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black ,


Customized colors: custom color.

Glass: Double layer uv - resistant acrylic glass.

Open: The window is equipped with support rods, which can be pushed to open two angles, and can open up to 65 degrees.


Main functions: The window has the functions of opening, closing, ventilation, light transmission, shading, Insect prevention , sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

Installation diagram

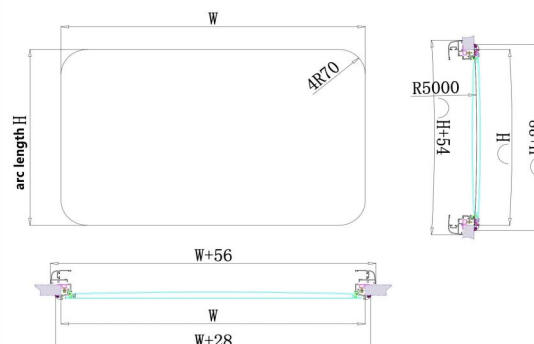



RV Skylight



High-quality
Aluminum alloy profile,
Powder coating



High-quality glass fiber
Gauze curtain
Shading curtain integration



Double layer UV
resistant acrylic



Gas support rod



Specification parameters



Regular Size W-H	Product Size/mm (W+127) - (H+127)	Cutout Size/mm (W) - (H)
450-400	577-527	450-400
500-500	627-627	500-500
700-500	827-627	700-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm;

Installation diagram



Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black ,

Customized colors: custom color.

Glass: Double layer uv - resistant acrylic glass.

Gauze curtain: High-quality fiberglass curtain and shading curtain.

Open: The air brace can open up to 65°.


Main function: The window has the functions of opening, closing, ventilating, transmitting light, shading, prevention Insect , sound insulation, heat insulation, privacy and good waterproof performance. Light structure, easy to install and use, firm and durable.

Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



Used in RV or buildings



RV Skylight (Remote control lights)



Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black ,

Customized colors: custom color.


Glass: Double layer uv - resistant acrylic glass.

Gauze curtain: High-quality fiberglass curtain and shading curtain.

Open: The air brace can open up to 65°.

Light: A small light control key controls the opening and closing of the light

Main function: The window has the functions of opening, closing, ventilating, transmitting light, shading, prevention Insect, sound insulation, heat insulation, privacy and good waterproof performance. Light structure, easy to install and use, firm and durable.



High-quality
Aluminum alloy profile,
Powder coating



High-quality glass fiber
Gauze curtain
Shading curtain integration



Double layer UV
resistant acrylic



Gas support rod

Specification parameters

Regular Size W-H	Product Size/mm (W+127) - (H+127)	Cutout Size/mm (W) - (H)
450-400	577-527	450-400
500-500	627-627	500-500
700-500	827-627	700-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;




H: Height of the Window mounting surface, unit mm;

Main applications

Used in RV or buildings,
Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.


Installation diagram

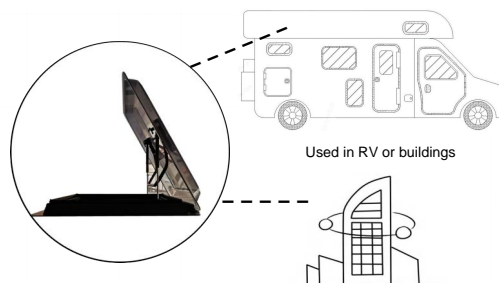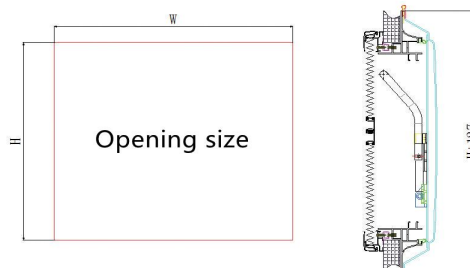



RV Curved Skylight

Product features



Double layer UV
resistant acrylic



Support rod



High-quality
Aluminum alloy profile,
Powder coating



High-quality glass fiber
Gauze curtain
Shading curtain integration

Product pictures



Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black ,

Customized colors: custom color.

Glass: Double layer uv - resistant acrylic glass.

Gauze curtain: High-quality fiberglass curtain and shading curtain.

Open: The window is equipped with a support rod, which can be pushed to open two angles, and can open up to 65 degrees.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, shading, Insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

Specification parameters

Regular Size W-H	Product Size/mm (W+404)-(H+56)	Cutout Size/mm (W)-(H)
900-600	1304-656	900-600

Specifications can be negotiated and customized according to user requirements.

W: Width of window mounting surface, unit: mm;


H: Arc length height of window mounting surface, unit: mm.

Main applications


Used in RV ,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.

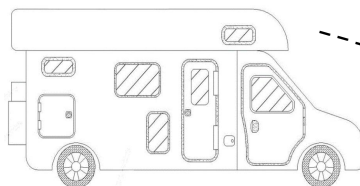

Installation diagram

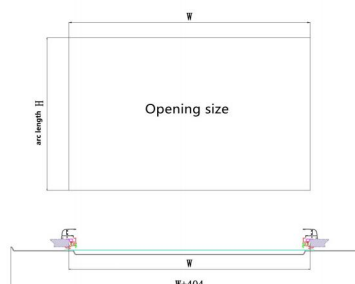



Starry sky window

Product pictures



Product features



Toughened glass



High-quality
Aluminum alloy profile,
Powder coating

Application scenario



Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
1200-1900	1226-1926	1200-1900

Specifications can be negotiated and customized according to user requirements.

W: Width of window mounting surface, unit: mm;

H: Arc length height of window mounting surface, unit: mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.


Normal colors: black and white;

Customized colors: silver grey, etc


Glass: 4mm toughened glass (certified for safety)

Open: Fixed window, not open.

Main function: The window has light transmission, Insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.



Installation diagram

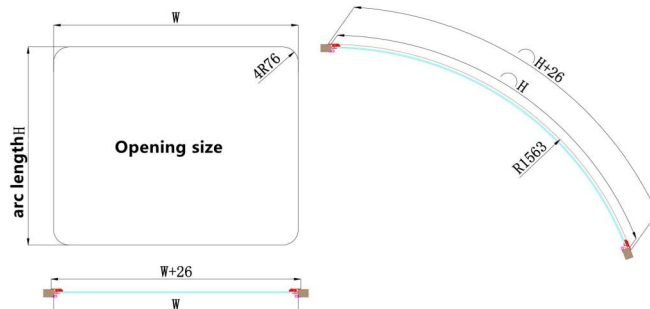

Used in RV

Main applications

Used in RV ,
Different installation frames are suitable for different wall thicknesses;
Total applicable range of wall thickness: 30-80mm.



Tent skylight

Product pictures



Product features



High-quality
Aluminum alloy
Powder coating



UV resistant acrylic glass



Support rod

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black ,

Customized colors: custom color.

Glass: Single-layer UV-resistant acrylic glass
Double-layer UV resistant acrylic glass (optional).

Open: Gear support rod, Maximum opening 65 °
Air strut (optional)

Main functions: The window has the functions of opening, closing, ventilation, light transmission, sound insulation, heat insulation, privacy and good waterproof performance. Lightweight structure, easy installation and use, firm and durable.

Specification parameters

Regular Size (W-H)	Product Size/mm (W+117)-(H+117)	Cutout Size/mm (W)-(H)
704-504	821-621	704-504

Specifications can be negotiated and customized according to user requirements.




W: Width of window mounting surface, unit: mm;

H: Arc length height of window mounting surface, unit: mm.


Main applications

Used for caravans or tents. Applicable wall thickness is 4-6 mm, and special wall thickness can be customized.

Installation diagram

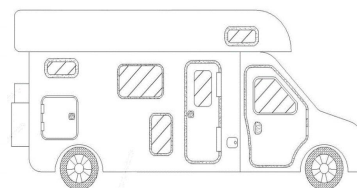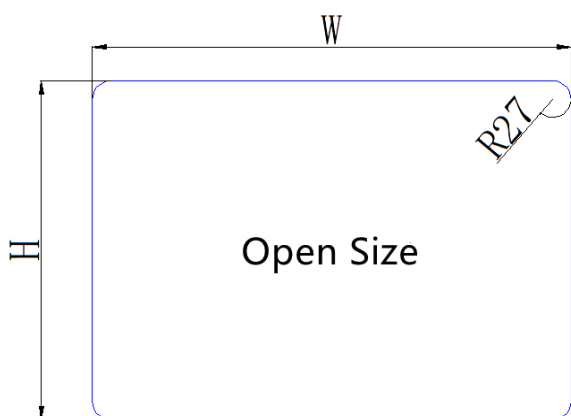

Used for caravans or tents.





MS-F manual folding Single step

Product pictures



Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Specification

MS-F-W- S

MS-F: Represents product code;

W: Represents the length of the net size of the step;

S: Represents the number of steps, single

Product features



High-quality carbon steel



High-quality aluminum alloy profiles with anti-skid surface design




SUS304

Specification parameters



Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
MS-F-450-S	450-210	430
MS-F-500-S	500-210	480
MS-F-550-S	550-210	530
MS-F-600-S	600-210	580

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.

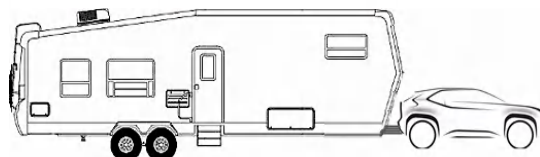

Installation diagram



NOTE: Steps above three levels can be customized



MS-F manual folding Double step

Product pictures



Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Specification

MS-F-W- S

MS-F: Represents product code;

W: Represents the length of the net size of the step;

S: Represents the number of steps, single

Product features



High-quality carbon steel



High-quality aluminum alloy profiles with anti-skid surface design



SUS304

Specification parameters




Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
MS-F-450-D	450-210	430
MS-F-500-D	500-210	480
MS-F-550-D	550-210	530
MS-F-600-D	600-210	580

Specifications can be customized according to customer requirements.W:

The net size and length of the step pedal.

NOTE:Steps above three levels can be customized

Installation diagram

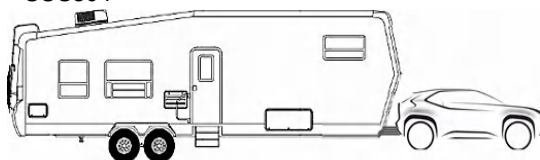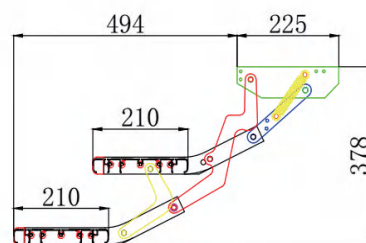



MS-F Electric folding RV step

Product pictures



Double step



Single step

Product features



High-quality carbon steel



SUS304




Motor




High-quality aluminum alloy profiles with anti-skid surface design

Installation diagram

Single step:



Double step:

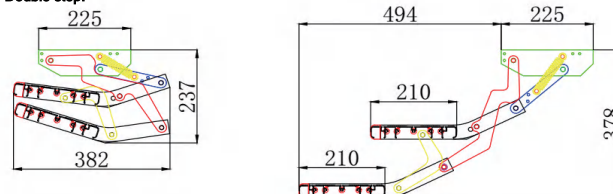

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Open: When the door is opened, the step will open automatically, and when the door is closed, the step will shrink automatically.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Specification parameters

Regular Size W	Net size of pedal length-width	Spacing of mounting holes (W-20)
E-F-450-S	450-210	430
E-F-500-S	500-210	480
E-F-550-S	550-210	530
E-F-600-S	600-210	580
E-F-450-D	450-210	430
E-F-500-D	500-210	480
E-F-550-D	550-210	530
E-F-600-D	600-210	580

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.



Specification

S
E-F-W- D

E-F: Represents product code;

W : Represents the length of the net size of the step;

S, D : Represents the number of steps, single, Double



HD Storage door

Product features



Product Features and Main Functions

Door frame: High-quality aluminum alloy profiles.

Panel: Anti-ULTRAVIOLET or Aluminum alloy composite sandwich panel.

Door lock: American self - tensioning tongue lock.


Hinge: Aluminum alloy hinge.

Appearance: Powder coating, white color as usual, black or silver grey as required.

Main functions: The storage door is easy to install, firm and durable, has low requirements on the accuracy of opening size, beautiful appearance, can be opened at 180°, and can be customized according to customer requirements.

Main applications

Camp type trailer special, suitable for wall thickness of 30~60mm.

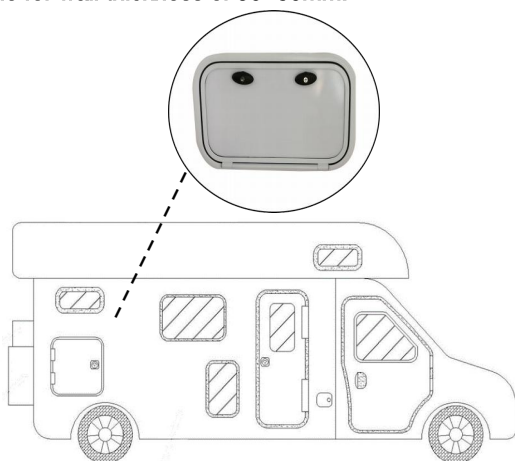

Product pictures



Application scenario



Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
400-300	426-326	400-300
450-350	476-376	450-350
500-300	526-326	500-300
500-350	526-376	500-350
500-400	526-426	500-400
600-300	626-326	600-300
600-450	626-476	600-450
650-350	676-376	650-350
650-480	676-506	650-480
700-200	726-226	700-200
700-300	726-326	700-300
700-500	726-526	700-500
700-600	726-626	700-600
800-500	826-526	800-500
800-600	826-626	800-600
900-300	926-326	900-300
900-500	926-526	900-500
1100-500	1126-526	1100-500

Specifications can be customized according to customer requirements.

Specification

T
B WH

HD-W-H- BL(custom)

L
R GR(custom)


HD: Represents product code;

W*H : Represents the width * height of the product mounting surface;

T/B/L/R: The position of hinge is above/below/left/right of the storage door;

WH/BL/GR : The colors are white/black/silver grey.

Installation diagram

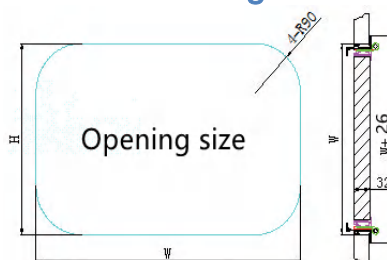



BD Rv warehousing door

Product features




High-quality aluminum alloy profile powder spraying



Powder coated High-strength aluminum alloy



mechanical linkage Three point lock

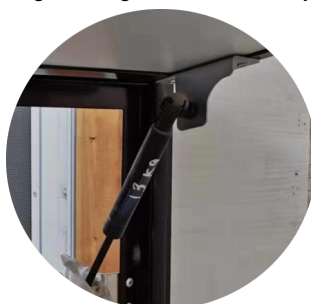

Air spring support rod For automobiles

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Panel: Powder coated high-strength aluminum alloy panel/non-slip aluminum plate, painted in black, white, silver gray or aluminum alloy color, can also be customized according to customer requirements.

Support rod: Air spring support rod for automobiles.

Open: lift open with an opening Angle greater than 90°

Door lock: mechanical linkage three point lock.

Main functions: The door of The storeroom realizes The function of opening, closing and locking. Light structure, easy to install and use, firm and durable, various models.

Options:

1. The panel is Sprayed aluminum sheet;
2. Non-slip aluminum panel.

Main applications

Used in the storage room of RV.

Specification parameters


Regular Size W-H	Product Size/mm (W+50)-(H+56)	Cutout Size/mm (W)-(H)
1524-450	1574-506	1524-450
1524-380	1574-436	1524-380
1524-385	1574-441	1524-385

Specifications can be customized according to customer requirements.


W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Application scenario

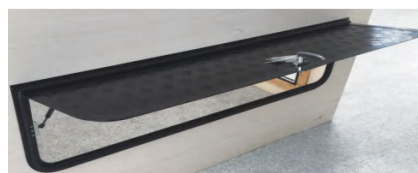

Installation diagram

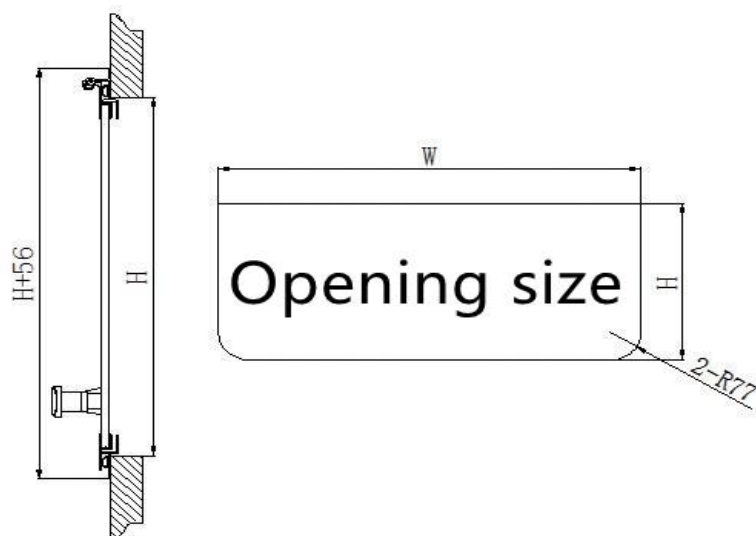


Product pictures





Pickup sliding window

Product pictures

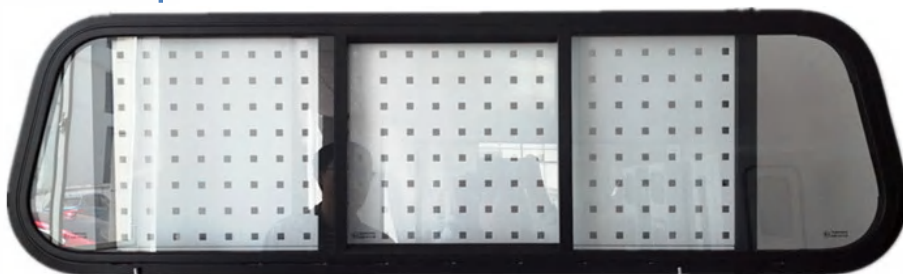

Product features

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Glass: 3mm tempered glass (with safety certification).

Opening: Push-pull opening,

The middle glass can be pushed and pulled.


Main functions: The window has good functions of light transmission, sound insulation and insect prevention. The sliding window adopts self tapping screws to fix the wall, which has the advantages of simple installation and use, light structure, firmness and durability, and various models.



High-quality aluminum alloy powder coating



Push-pull opening



3mm tempered glass


Main applications

This product is applicable to all types of pickup trucks

Specification parameters

Specifications can be negotiated and customized according to user requirements.

Installation diagram

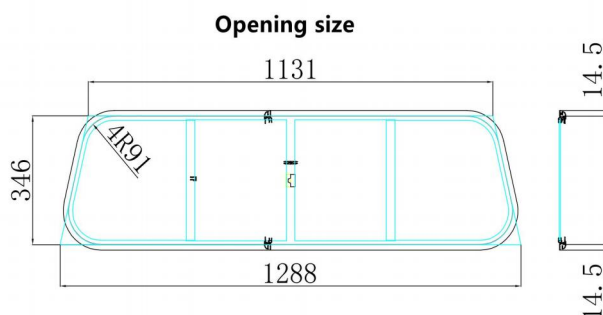



Pickup sliding window

Product features



3mm tempered glass



Push-pull opening



One sided
screen window



High-quality aluminum alloy
powder coating

Product pictures



Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Glass: 3mm tempered glass (with safety certification).

Opening: push-pull type open, one side glass can push pull.

Window screen: One side built-in removable screen window

Main functions: The window has good functions of light transmission, sound insulation and mosquito prevention. The sliding window adopts self tapping screws to fix the wall, which has the advantages of simple installation and use, light structure, firmness and durability, and various models.

Specification parameters


Specifications can be negotiated and customized according to user requirements.

Main applications

This product is applicable to all types of pickup trucks

Installation diagram

Opening size

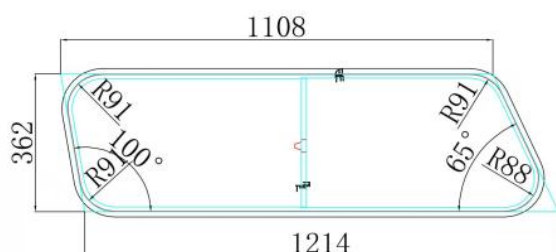



Pickup Tophung Hinged window

Product pictures



Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black;

Customized colors: Custom colors.

Glass: 3mm tempered glass (with safety certification).

Opening: The window is equipped with a gas support rod, which can be pushed out.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, sun shading Anti mosquito, sound insulation, heat insulation, privacy and other functions and Good waterproof performance. Available when screens and windows are open As an emergency exit (except for small windows). Lightweight structure, It is easy to install and use, firm and durable, and has various models.

Product features



3mm tempered glass
(with safety certification)



High-quality aluminum alloy
powder coating



Air support rod

Specification parameters


Specifications can be negotiated and customized according to user requirements.

Main applications

This product is applicable to all types of pickup trucks

Installation diagram

Opening size

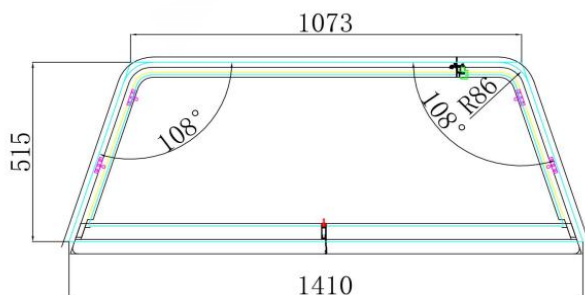



Pickup Tophung Hinged window

Product features



High-quality aluminum alloy powder coating



3mm tempered glass (with safety certification)



Self tensioning tongue lock



Air support rod

Product pictures



Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.
Normal colors: black;
Customized colors: Custom colors.

Glass: 3mm tempered glass (with safety certification).

Window lock: Self tensioning tongue lock

Opening: The window is equipped with a gas support rod, which can be pushed out.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, sun shading Anti mosquito, sound insulation, heat insulation, privacy and other functions and Good waterproof performance. Available when screens and windows are open As an emergency exit (except for small windows). Lightweight structure, It is easy to install and use, firm and durable, and has various models.

Specification parameters


Specifications can be negotiated and customized according to user requirements.

Main applications

This product is applicable to all types of pickup trucks

Installation diagram

Opening size

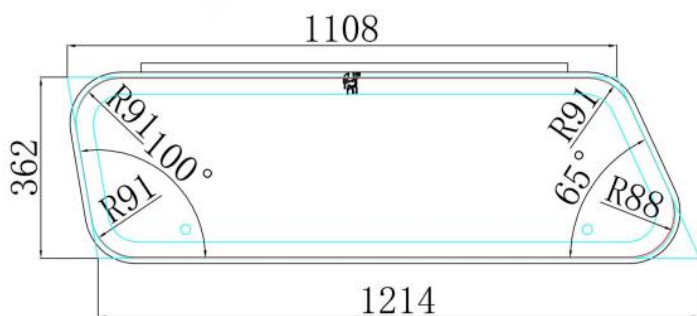



Frameless RV window

Product features




Double layer uv - resistant acrylic



High-quality aluminum alloy hinges



Air support rod



High-quality glass fiber Gauze curtain
Shading curtain integration

Product pictures



Product Features and Main Functions

Window hinges: High-quality aluminum alloy profiles, powder coating.

Window hinges color: Normal color is black.

Glass: Double layer uv - resistant acrylic glass.

Gauze curtain: High-quality fiberglass curtain and shading curtain.

Open: The window is equipped with support rods, which can be pushed to open two angles, and can open up to 65 degrees.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, shading, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

Specification parameters


Specifications W-H	Dimensions/mm (W+90)-(H+90)	Opening size/mm (W)-(H)
700-500	790-590	700-500

Specifications can be customized according to customer requirements.

W: Width of window mounting surface, unit mm;


H: Height of the window mounting surface, unit mm;

Installation diagram

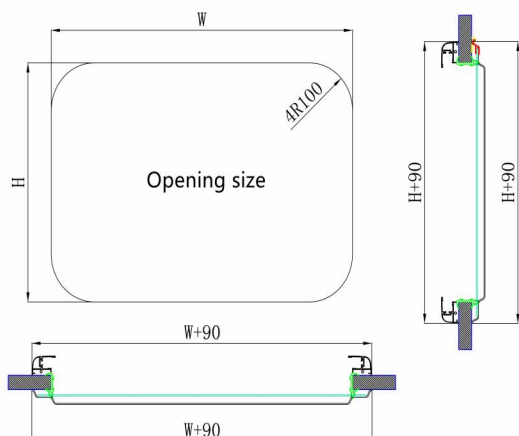

Main applications

For RV; suitable for different wall thickness: 30-80mm.

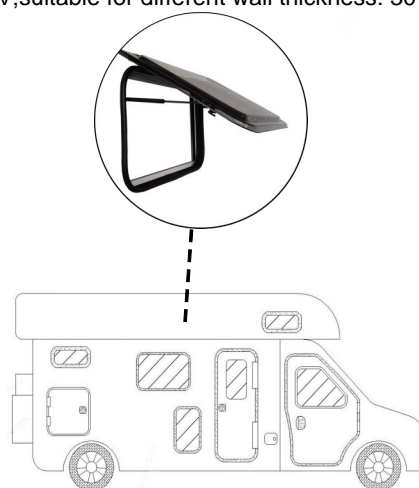



Product features



High-quality aluminum alloy panel



High-quality aluminum alloy frame



Rotary tongue lock



Aluminium alloy hinge

Product pictures



Product Features and Main Functions

Table frame: High-quality aluminum alloy profile.

Table panel : High-quality aluminum alloy plate.

Lock: Rotary tongue lock.

Hinge: Aluminum alloy hinge.

Main function: The small table is easy to install, firm and durable, installed on the outside of the car body, easy to install, beautiful and generous

Specification parameters


Regular Size W-H	Product Size/mm (W)-(H)	Cutout Size/mm (W)-(H)
800-450	800-450	800-450

Specifications can be customized according to customer requirements.

Description

Size: 800mm X 450mm X 20mm
Product Weight: 5KG
Load carrying capacity: 30KG

Installation diagram

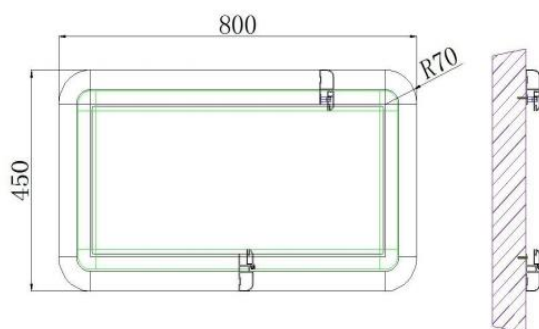

Main applications


Trailer and self-propelled RV.







RV Shower Door

Product features



Honeycomb structure
Non-woven fabric



High-quality
Aluminum alloy frame

Product pictures



Product Features and Main Functions

Frame: High-quality aluminum alloy profile.

Shower Curtain: Honeycomb non-woven fabric.

Appearance: The conventional colors are sky blue and beige; It can also be customized according to customer requirements.

Main functions: This product adopts honeycomb like structure, waterproof and mildew proof non-woven cloth surface Material, heat insulation, noise reduction, heat preservation and cooling. Push-pull opening maximum Save shower space, after unfolding, dry and wet separation, no dead corner, rest assured to shower. After folding, it does not occupy space and is beautiful


Specification parameters

Specifications can be customized according to customer requirements.
Aluminum alloy shower door can also be customized.

Main applications

RV and buildings.

Product structure

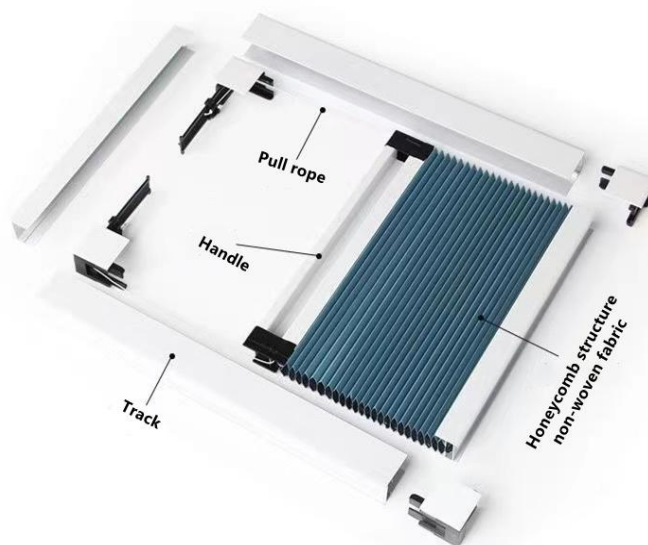



Bathroom sliding door

Product pictures



Product features



Aluminum film attached to the exterior surface



Magnetic adsorption handle



Installation diagram of lower guide rail



(ABS) 90° adapter angle

Product Features and Main Functions

Main material: PVC surface with aluminum film+high-strength aluminum alloy handle;

Color: Silver, white.

Main function: This product is made of aluminum alloy material, which is durable and durable. The unique structure can block moisture and keep warm. The push-pull opening is easy to install, and after unfolding, there is no dead angle for dry and wet separation.

Specification parameters


Regular Size	Product Size/mm	Cutout Size/mm
W-H	(W-H)	(W)-(H)
600-2000	600-2000	600-2000

Specifications can be customized according to customer requirements.

Main applications

RV and buildings.

Installation diagram

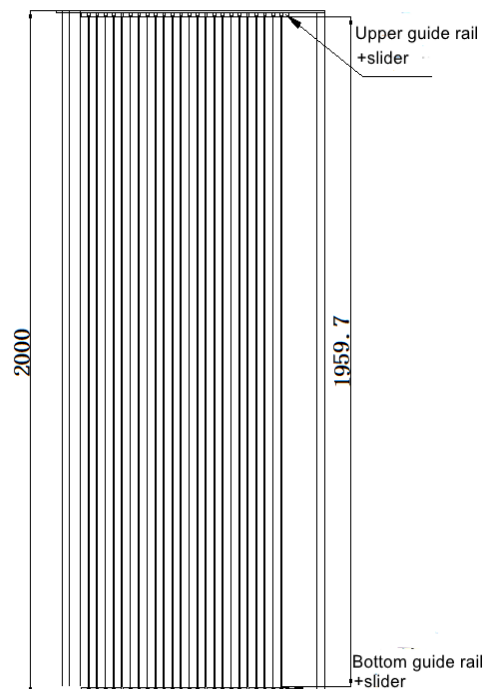



Aluminum plate (Aluminum body decoration) & Guide the rain trough

Aluminum plate (Aluminum body decoration)

Product pictures



Application scenarios



Specification parameters

Specifications can be customized according to customer requirements.

Product Features and Main Functions

Aluminum plate: High-quality aluminum alloy surface anti ultraviolet roller coating.

Color of aluminum plate: The conventional color is white.

Installation: The aluminum plate is fixed on the body frame by inserting.


Main functions: This piece is used as the exterior decoration of the RV. It is easy to install and can effectively reduce the body weight. It is high-end, beautiful and atmospheric.

Guide the rain trough

Product pictures



Description

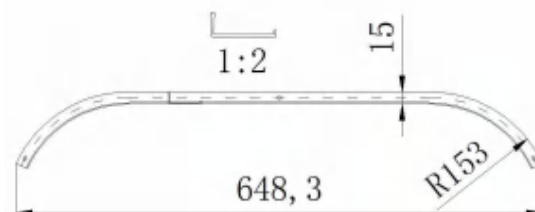

Specification parameters

Specifications can be customized according to customer requirements.

Product Features and Main Functions

Rain chute: High-quality aluminum alloy profile, powder spraying.

Color: The general color is white.

Installation: Install the rain chute above the door of the RV.

Main functions: The upper edge of the RV door guides the rainwater to improve the sealing stability of the RV door. The rain guide groove is easy to install.



RV ladder&aluminum Article sealing side

RV ladder

Product pictures



Specification parameters

Specifications can be negotiated and customized according to user requirements.

W: The width of the RV ladder, unit mm;

H: The height of the RV ladder, unit mm.

Product Features and Main Functions

RV Ladder: High-quality aluminum alloy profiles, powder spraying.

RV Ladder color: The normal color is white and black.

Mounting: Screw mounted in proper position.

Main functions: It is convenient for people to get on and off the rv roof. The load bearing can reach 200KG. It is durable and will not be deformed for a long time. The ladder structure is light and easy to install and use.

aluminum Article sealing side

Product pictures



Specification parameters

Specifications can be negotiated and customized according to customer requirements.

The length, Angle, etc of the Article sealing side

Product Features and Main Functions

Aluminum Article sealing side: High-quality aluminum alloy profiles, powder coating.

Color of aluminum strip: White and black are the normal colors.

Installation: Install Article sealing side at the joint of the top and side of the RV.

Main functions: This piece is used as the top and side splicing part of the rV to draw the edge, and has the sealing and aesthetic function, easy to install.




Product pictures



Product features



UV - resistant acrylic



High-quality aluminum alloy



safety certified single point lock

Specification parameters

Specifications can be customized according to user requirements.

Main applications

RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: custom color.

Door panel: White UV resistant composite sandwich panel (other colors can be customized).

Glass: UV resistant acrylic glass.

Door lock: safety certified single point lock.

Structure: Unique structure. The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Light structure, easy installation and use, firm and durable, and various models



RV Double-doors

Product features



Frosted tempered glass
UV - resistant acrylic



safety certified
single point lock



High-quality
aluminum alloy profile
powder coating


Product pictures



Specification parameters

Specifications can be customized according to user requirements.

Installation diagram

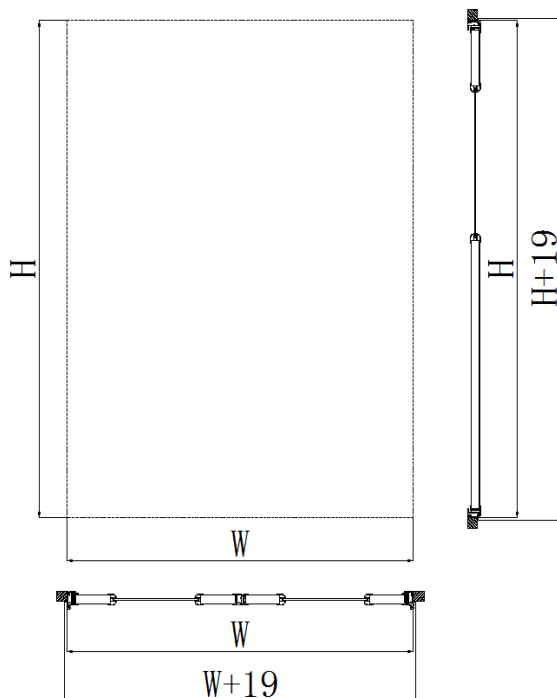

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized);

Glass: Frosted tempered glass or UV - resistant acrylic sheet is available.

Door lock: Safety certified single point lock.

Structure: Unique structure, one door can be opened separately, or both doors can open; The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, and various models.

Optional: see specification for details.

Optional parts: Door Stop.
(Optional items must be ordered separately)

Main applications

Suitable for RV with wall thickness of 30-60mm.




RV Water Inlet Hatch

Product pictures



Specification parameters

FEATURES & BENEFITS


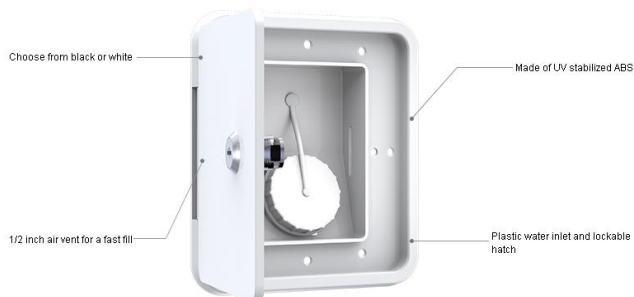


Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-151-166-01	5.94"(151mm)	6.54"(166mm)	4.27"(108.5mm)	3.01"(76.5mm)	white
SFWH1-151-166-01	5.94"(151mm)	6.54"(166mm)	4.27"(108.5mm)	3.01"(76.5mm)	black
SFWH1-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	white
SFWH2-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	black

Product Features and Main Functions

1. Quick and easy to install, keep it beautiful.
2. Using UV resistant materials.
3. Tighten the screw with a screwdriver.

Installation diagram

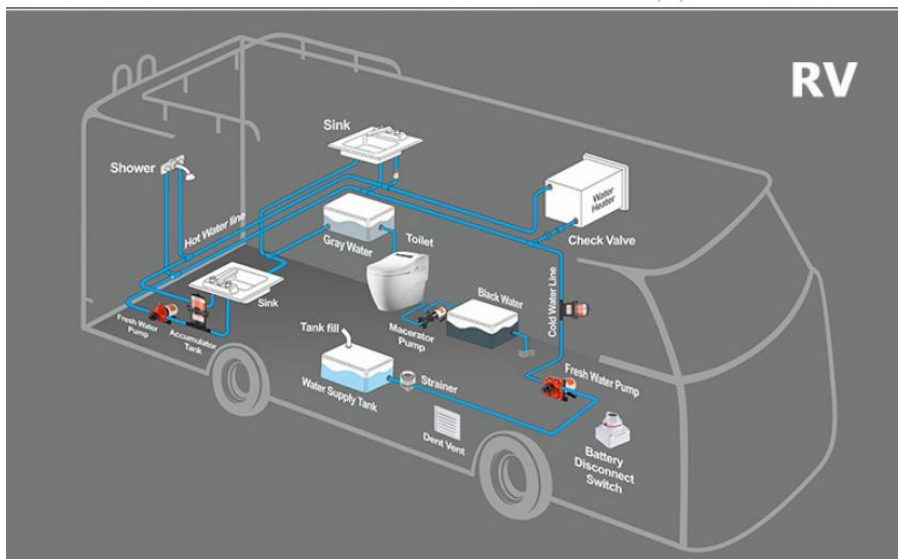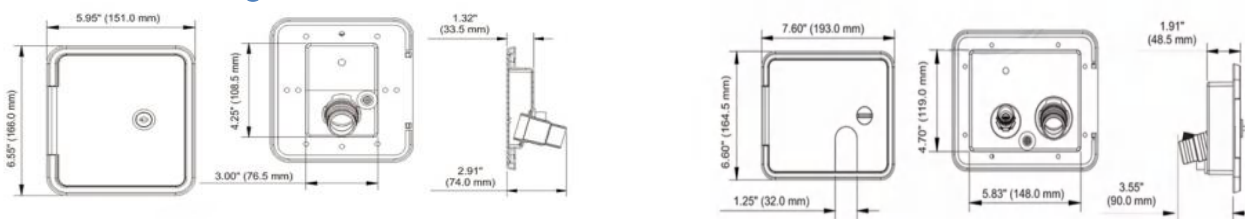




RV refueling port

Product pictures



Specification parameters

FEATURES & BENEFITS

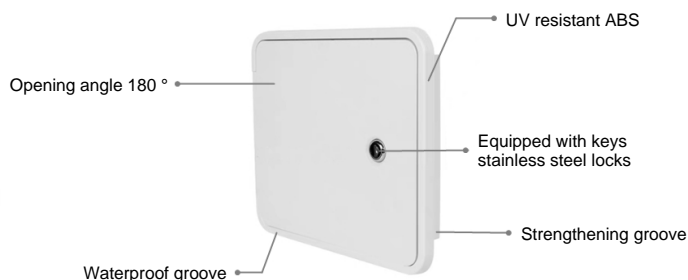

Product Features and Main Functions

1. UV resistant ABS

High quality anti-aging ABS plastic, specially added with anti ultraviolet component to extend service life

2. Waterproof trench

When it rains or washes the car, the anti sink can quickly drain water; High waterproof grooves can effectively prevent rainwater from entering the cabin door

3. Stainless steel safety lock

The safety lock head is made of stainless steel material, which is corrosion-resistant, not easy to rust, and has high durability

4. 180° opening and closing

Large opening and closing angle, convenient for subsequent refueling, and easy to use

5. Strengthening groove

Enhanced design, resistant to deformation, durable

6. Stainless steel screws

Equipped with stainless steel screws, it has good stability and is not easy to rust.

Appearance size: 260 * 230 * 50mm

Opening size: 210 * 180mm

Hatch space size: 205 * 175mm

Protruding thickness: 11mm

Application and Scope of Application



Hatch with Bottom

Applicable:
modification of charging ports,
switch sockets, etc



No bottom hatch

Applicable:
water filling port,
oil filling port,
maintenance port, etc

Installation diagram





OR-RV doors and windows

OR-RV Windows

Product pictures



Window frame: High-quality aluminum alloy profile;

Window frame color: Aluminum alloy natural color;

Glass: Double hollow tempered glass;

Gauze curtain: High-quality glass fiber gauze curtain and blackout cloth curtain.

Opening: The window is equipped with a support rod, which can be pushed outward, and can be opened up to 65 degrees.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, sunshade, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When the screen curtain and window are opened, they can be used as emergency exits (except for small windows). Lightweight structure, easy installation and use, firm and durable, and various models. More suitable for off-road and other needs

OR-RV Doors

Door frame: High-quality aluminum alloy profile;

Door plate: High-quality aluminum plate;

Glass: Double hollow tempered glass fixed window;

Door lock: safety certification two-point lock.
Upgradeable customized central lock, password lock, face recognition function

Structure: The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, and various models.

Optional: See the specification for details.

Optional: Door stopper. (Optional parts must be ordered separately)

Specification parameters

Specifications can be customized according to user requirements.

Main applications

Applicable to RV with wall thickness of 50mm, other wall thickness sizes can also be customized



Specification parameters

Specifications can be customized according to user requirements.

Main applications

Applicable to RV with wall thickness of 50mm, other wall thickness sizes can also be customized



Product pictures





OR-RV Storage door

Product pictures



High-quality
Aluminum alloy
Door panel



High-quality
Aluminum alloy
Door frame



Flat press lock



High-quality
Aluminum alloy
Hinge



High quality
Sealant strip

Product Features and Main Functions

Door frame: High-quality aluminum alloy profiles.

Door Panel: High-quality Aluminum alloy panel.

Door lock: Flat press lock.

Door Hinge: High-quality Aluminum alloy hinge.

Door Color: Black, white, custom colors.

Sealing performance: High quality sealant strip.

Opening angle: 180 ° opening and closing, convenient to use

Main function: This product is suitable for a wide range of scenarios and has good waterproof performance. It can be used as a storage door or as a small dining table with a support rod added. Aluminum alloy material can prevent rust and is durable. The flat press lock design saves your space while making it easy to use. Press to open the storage door.

Specification parameters

Regular Size	Product Size/mm	Cutout Size/mm
W-H	(W+44)-(H+44)	(W)-(H)
Customized size	Customized size	Customized size

Specifications can be customized according to customer requirements.


W: Width of Storage door mounting surface, unit mm;

H: Height of the Storage door mounting surface, unit mm;

Main purpose

Suitable for RVs with a wall thickness of 25-75mm;
Other wall thickness sizes can also be customized.

Installation diagram

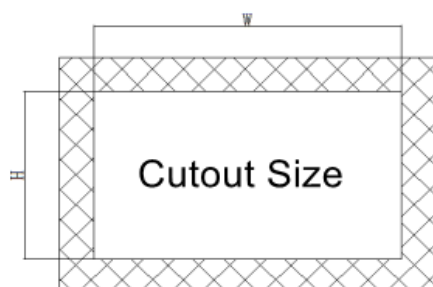



Horse trailer doors and windows

Horse trailer window

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Glass: Tawny PC board.

Gauze curtain: One side built-in screen window.

Window lock: crescent lock, installed on the outside.

Open: Push-pull type open, one side glass can push pull.

Main function: The window has light transmission, mosquito proof, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Specification parameters

Specifications can be customized according to user requirements.

Product pictures



Main applications

Applicable to RV and Horse trailer



Horse trailer window



Horse trailer door

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: white anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass or UV - resistant acrylic sheet is available.

Aluminum mesh: high strength aluminum mesh.

Gauze curtain: high strength glass fiber curtain.

Door lock: safety certified single point lock.

Other locks can also be customized

Optional: see specification for details.

Optional parts: Door Stop.(Optional items must be ordered separately)

Main function: The door has opening, closing, locking, ventilation, light transmission, mosquito proof, sound insulation, heat insulation and good waterproof performance. Light structure, easy to install and use, firm and durable, various models.

Product pictures



Horse trailer door



Specification parameters

Specifications can be customized according to user requirements.

Main applications

Applicable to RV and Horse trailer



Special vehicle windows

Product pictures

Large Bus window



Expressway toll booth window



Medium-sized Bus window



Special machinery



Sightseeing bus column



Small police car frame



Electric vehicle Door, window



Specification parameters

Customize products according to your needs

企业资质Enterprise qualification



企业质量方针 Enterprise quality policy

客户至上，奋斗为基
Customer first, strive for the base
质量为本，开心共赢
Quality - oriented, win-win cooperation.

企业愿景 Enterprise vision

匠心成就您的美好生活
Focus on achieving your better life

企业使命 Corporate mission

至诚至信，合作共赢
Sincerity to letter, win-win
cooperation

企业核心价值观 Company Core Values

务实奋进，以人为本
Pragmatic forge ahead, people-oriented
开拓创新，客户为先
pioneering and innovative, customer first.



TONGFA

泰州市同发汽车配件有限公司

Taizhou Tongfa Automobile Fitting Co.,Ltd

地址：江苏省泰州市海陵区鲍徐路2号

Address: No. 2, Baoxu Road, Hailing District, Taizhou, Jiangsu Province

电话：0523-86847149


Tel：0523-86847149

手机：18052677777

Phone：18052677777


网址：www.tz-tongfa.com

Web：www.tz-tongfa.com



关注抖音，了解更多

Pay attention to Tiktok and learn more



扫一扫，添加微信

Scan to add WeChat