

Taizhou Tongfa Technology Co., Ltd



JIANGSU TAIZHOU



公司简介

Company Introduction

泰州市同发科技有限公司成立于2009年，公司位于有着“水陆要津，咽喉据郡”之称的苏中门户-泰州；公司位置水陆交通便捷，环境优雅。“专业”源自于“坚持”，‘同发’作为国内第一批从事房车配件研发与生产的企业，多年如一日的专注让我们深耕于房车行业。

公司现有260余名员工，拥有较强的生产制造能力；专业技术研发人员达20余名，不断推陈出新，把更好的产品带给我们；专业的质检部门严格把关，保证产品质量。多年来，公司创建了完善的质量控制服务体系；不光通过ISO9001质量管理体系认证，还通过了E-MARK欧盟认证等多项认证。

我们秉承“客户至上，奋斗为基；质量为本，齐心共赢”的企业方针；树立“务实奋进，以人为本；开拓创新，客户为先”的企业核心价值观；将“至诚至信，合作共赢”的企业使命贯彻到底；“匠心成就您的美好生活”是我们一直以来的企业愿景。

公司目前拥有国内较为先进的完整生产线，专业从事房车配件的设计、研发和生产制造；公司产品涵盖房车门、房车窗、房车储物门、房车舱储物门、房车天窗、房车踏步、房车小餐桌、房车通风换气扇、房车淋浴门、皮卡车车窗、特种车辆车窗等；公司目前与国内外多家公司达成友好合作关系，其中包括澳大利亚、韩国、日本、美国、法国、德国、英国、土耳其等多个国家和地区。公司目前拥有多项相关行业专利，专业和服务赢得了很多国内外客户的认可与支持。

我司丰富的经验以及良好的产品质量收到了各界客户的广泛认可。

我公司愿与国内外各界同仁竭诚合作，共创未来！

我们竭诚欢迎各界人士来厂参观洽谈！

Taizhou Tongfa Technology Co., Ltd was established in 2009, the company is located in Taizhou, the gateway of central Jiangsu Province, which is known as "the key to land and water, the throat of the county"; the location of the company has convenient land and water transportation and elegant environment.

The company has more than 260 employees, with strong manufacturing capacity; Technical Product developer & Engineer of more than 20, constantly pushing out new ideas to bring better products to our customers; professional quality control department strictly to ensure product quality.

We are adhering to the enterprise policy of "customer first, struggle-based; quality-oriented, win-win"; establishing the enterprise core values of "pragmatic and progressive, people-oriented; pioneering and innovative, customer first"; the enterprise mission of "sincerity and trust, win-win cooperation". The mission of "Sincerity, Cooperation and Win-win" is carried out to the end; "Craftsmanship to achieve your high quality life" is our corporate vision all along.

The company currently has a more advanced and complete production line, specializing in the design, development and manufacture of RV accessories; our products include RV doors, RV windows, RV storage doors, RV cabin storage doors, RV skylights, RV steps, RV small dining tables, RV ventilation fans, RV shower doors, pickup truck windows, special vehicle windows, etc.; We has established good business relationships with many partners, including Australia, Korea, Japan, the United States, France, Germany, the United Kingdom, Turkey and other countries and regions. etc. Our rich experience and good quality of products have been widely recognized by customers from all walks of life.

We will provide good communication and willing to establish a long-term cooperative relationship with you.

Our goal is to create a better future altogether. We sincerely welcome (you) people from all around the world to visit our factory.



泰州市同发科技有限公司
Taizhou Tongfa Technology Co., Ltd

目 录

Contents

房车门系列/RV Door Series

SLD单点锁房车门	SLD Single point lock RV Door	01
ELD刷卡锁房车门	ELD electronic card lock RV Door	02
DLD房车门	DLD RV Door	03
TLD三联房车门	TLD Three point linkage lock RV Door	04
SLD水滴门	Teardrop RV Door	05
SLD拖挂式房车门	Trailer Door	06
SED单点刷卡锁门	Single point electronic card lock RV Door	07
SPD单点密码锁门	Single point password lock RV Door	08
SLD单点锁外推窗 房车RV门	SLD Single point lock RV Door with Tophung Hinged window	09
SLD单点锁提升窗 房车RV门	SLD Single point lock RV Door with Vertical Sliding window	10
SLD单点锁贴玻房车门	SLD Single point lock RV Door with glass	11

房车窗系列/RV Window Series

SW固定窗	SW Fixed window	12
SW推拉窗	SW Sliding window	13
SW双层推拉窗	SW Double Sliding window	14
HW双层外推窗 (圆角4R)	HW Double Tophung Hinged window (rounded corners)	15
HW双层外推窗 (方角4L)	HW Double Tophung Hinged window (right angle)	16
HW外推窗 (圆角单层钢化4R)	HW Tophung Hinged window (rounded corner single Toughened glass)	17
SW推拉窗 (单侧内置纱窗4R)	Sliding window (one side built-in screen window)	18
SW提升窗	RV Vertical Sliding window	19
VENT通风排气扇	VENT exhaust fan	20
VENT换气扇	VENT Ventilator	21
HW弧形外推窗	RV Arc Tophung Hinged window	22
SK房车直角天窗	RV Skylight	23
SK房车直角天窗 (遥控灯光LED)	RV Skylight (remote control light)	24
SK房车圆角天窗	RV rounded corner Skylight	25
SK前额天窗	RV Curved Skylight	26
SK星空窗	Starry sky window	27
SK帐篷天窗	Tent skylight	28
1332推拉/提升窗	1332 Sliding window	29
RV逃生窗	Escape window	30
SW双层亚克力圆窗	SW Double round window	31
BW 房车外推窗	BW RV Tophung Hinged window	32
HW 房车外平外推窗	HW RV Tophung Hinged Flat window	33

储物门、舱储物门系列/Storage door、warehousing door series

HD圆角储物门	HD Rounded corner Storage door	34
HD圆角储物门 (支撑杆款-S)	HD Rounded corner Storage door Support rod	35
HD直角储物门	HD Right angle Storage door	36
HD直角储物门 (支撑杆款-S)	HD Right angleStorage door Support rod	37
BD房车舱储物门	BD RV warehousing door	38

目 录

Contents

踏步系列/RV Step Series

MS-F手动	MS-F manual folding	39
单层(S)折叠踏步	Single step	
MS-F手动	MS-F manual folding	40
双层(D)折叠踏步	Double step	
E-F电动	E-F Electric folding	41
单层(S)折叠踏步	Single step	
E-F电动	E-F Electric folding	42
双层(D)折叠踏步	Double step	
MC手动平推踏步	MC manual CASSETTE STEP	43
EC电动平推踏步	Electric CASSETTE STEP	44
MS-F手动	MS-F manual folding	45
三层(T)折叠踏步	Three step	
MS-F手动	MS-F manual folding	46
四层(FO)折叠踏步	Four step	
MS-F手动	MS-F manual folding	47
伍层(FI)折叠踏步	Five step	
MS-F手动	MS-F manual folding	48
六层(SI)折叠踏步	Six step	

皮卡车窗系列/Pickup truck window series

PW皮卡前推拉窗	Pickup Front sliding window	49
PW皮卡侧推拉窗	Pickup Side sliding window	50
PW皮卡大外推窗	Pickup Rear Tophung Hinged window	51
PW皮卡侧外推窗	Pickup Side Tophung Hinged window	52

配件系列/Accessories series

RV房车餐桌	RV Table	53
RV房车淋浴门	RV Shower Door	54
RV浴室卷帘门	Bathroom sliding door	55
RV铝板	Aluminum plate	56
(RV车外身装饰铝板)	(Aluminum body decoration)	
RV导雨槽	Guide the rain trough	56
RV房车爬梯	RV ladder	57
RV铝封边条	Aluminum Article sealing side	57

特殊房车门系列/Arc RV door series

弧形房车RV门房车	Arc RV door	58
RV对开门	RV Double-doors	59
HW无框房车窗	Frameless RV window	60

房车进水口舱盖系列/RV water inlet hatch cover series

RV进水口舱盖	RV water inlet hatch	61
RV加油口	RV refueling port	62

特种车辆系列/Special vehicle series

越野房车门窗W&D	OR-RV doors and windows	63
越野房车储物门SD	OR-RV Storage door	64
运马车门窗WD	Horse trailer doors and windows	65
SV特种车辆车窗	Special vehicle windows	66



SLD Single point lock RV Door



High-quality
aluminum alloy
powder coating



High-quality
aluminum mesh
High-quality
Fiberglass sheer



safety certified
single point lock



Frosted tempered glass
UV - resistant acrylic



Trailer RV and
self propelled RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Door panel: white anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass/UV - resistant acrylic.
(Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: safety certified single point lock.


Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Main applications

Trailer RV and self-propelled RV,
suitable for wall thickness of 30~60mm.

Installation diagram

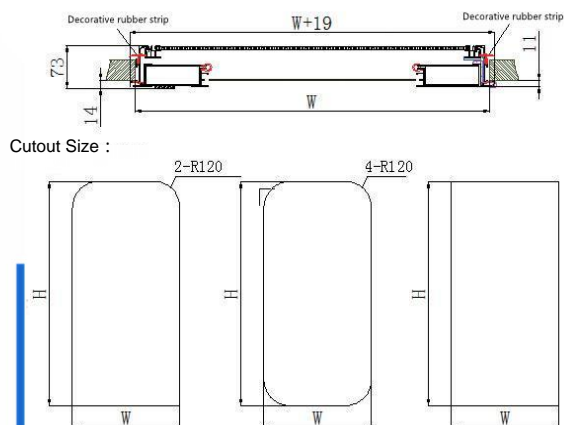

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to
customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

2R L Black

SLD-W-H- 4R - - White

4S R Silver gray (custom)

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray: Color of door frame

Accessories: Decorative rubber strip.

Optional parts: Door stop

(Optional items must be ordered separately)



Door stop



ELD electronic card lock RV Door



security certification
electronic card lock



Frosted tempered glass
UV - resistant acrylic



High-quality
aluminum alloy
powder coating



High-quality
aluminum mesh
High-quality
Fiberglass sheer

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;

Customized colors: silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel
(other colors can be customized).

Glass: Frosted tempered glass/ UV - resistant acrylic glass.
(Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: security certification electronic card lock, hotel type management.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance.

Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.



W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Main applications

Camp type trailer RV special,
suitable for wall thickness of 30~60mm.

Installation diagram

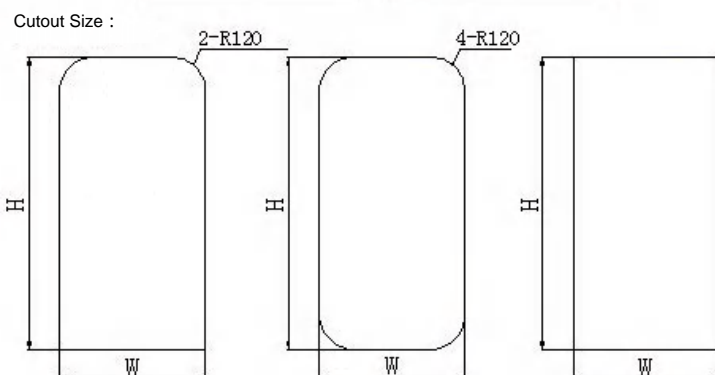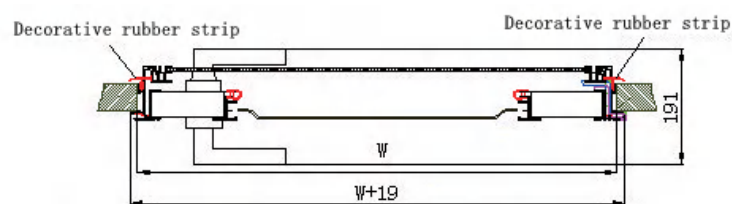

Specification

2R L Black

ELD-W-H- 4R - - White

4S R Silver gray (custom)

ELD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray : color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop.

(Optional items must be ordered separately)



Door stop



High-quality aluminum alloy profile powder coating



Automotive grade black privacy safety glass (3C E-MARK certified).



Double point lock



trash bin

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white/**Custom colors:** silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Automotive grade black privacy safety glass (3C E-mark certified).

Screen door: Black Folding screen door.

Door lock: Double point lock,

Optional locking device or password control can be installed


Structure: The door with garbage can, handle, with open, close, lock, ventilation, light, insect prevention, sound insulation, heat insulation and good waterproof performance. The structure is light, easy to install and use, firm and durable.

Optional: see specification for details.

Main applications

Trailer and self-propelled RV, suitable for wall thickness of 15-45mm ;
Special wall thickness can be customized

Installation diagram

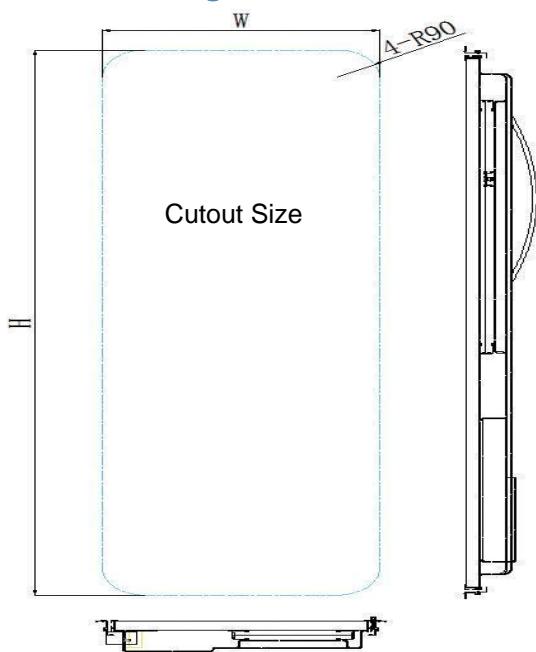

Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
600-1810	626-1836	600-1810
620-1920	646-1946	620-1920

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

Black

DLD-W-H- 4R -R- White

Silver gray (custom)

DLD: Specifications and models of doors

4R: Door with four rounded corners

R: The hinge is on the right side of the door

Black/White/Silver gray: color of door frame

Accessories: Decorative rubber strip.



Optional parts: Door Stop/Stainless steel trash can
/The armrest of the door can be equipped with lights
(Optional items must be ordered separately)

Door Stop:

Stainless steel trash can:



The armrest light of the door :



Trailer and self-propelled RV



TLD Three point linkage lock RV Door



UV - resistant acrylic
(E-mark Certified)



High-quality
aluminum alloy profile
powder coating



304 stainless steel diamond mesh Three point linkage lock
High-quality aluminum mesh
High-quality Fiberglass sheer

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Door panel: White anti-ultraviolet composite sandwich panel.
(other colors can be customized).

Glass: Uv - resistant acrylic glass (E-mark Certified) .

Screen door: 304 stainless steel diamond mesh;
High-quality aluminum mesh and
High-quality Fiberglass sheer. (Optional)

Door lock: Unique three-point linkage lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.


Optional: see specification for details.

Main applications


Trailer and self-propelled RV.

Suitable for wall thickness of 30mm - 40mm

Installation diagram

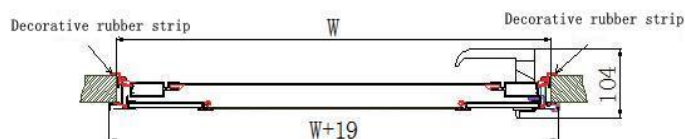

Cutout Size :

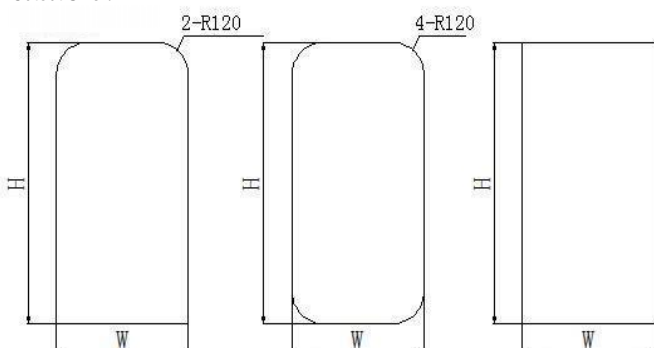

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
625-1750	644-1769	625-1750
630-1630	649-1649	630-1630
630-1435	649-1454	630-1435

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm.

Specification

2R L Black

TLD-W-H- 4R - - White

4S R Silver gray (custom)

TLD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray : Color of door frame

Accessories : Decorative rubber strip.

Optional parts : Door Stop;


Air vents(Plastic labyrinth ventilation openings;

It has functions such as ventilation and dust prevention).

(Optional items must be ordered separately)

Door Stop:

Air vent:

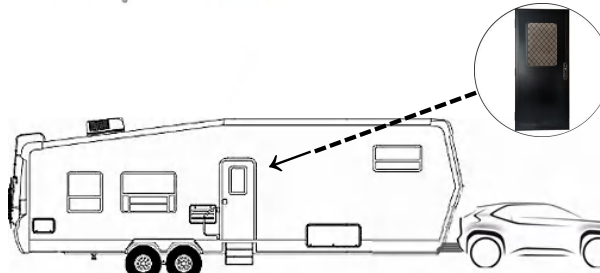

Trailer and self-propelled RV



SLD Teardrop RV Door



High-quality
aluminum alloy
powder coating




High-quality
aluminum mesh
High-quality
Fiberglass sheer



safety certified
single point lock



Frosted tempered glass
UV - resistant acrylic

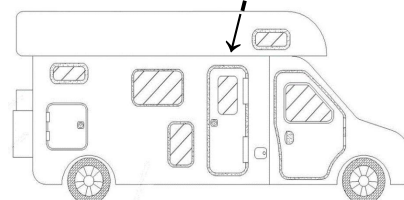

Trailer RV and
self propelled RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Door panel: white anti-ultraviolet composite sandwich panel
(other colors can be customized).

Glass: Frosted tempered glass/UV - resistant acrylic glass.
(Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: safety certified single point lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Specification parameters


Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.


W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Installation diagram

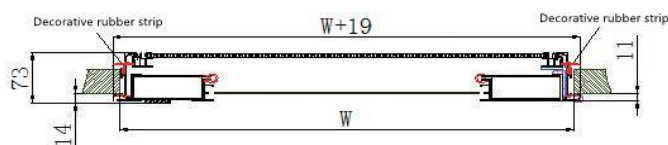

Cutout Size :



Main applications

Trailer RV and self-propelled RV,
suitable for wall thickness of 30~60mm.

Specification

2R L Black

SLD-W-H- 4R - - White

4S R Silver gray (custom)

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray: Color of door frame


Accessories: Decorative rubber strip.

Optional parts: Door stop

(Optional items must be ordered separately)



Door stop

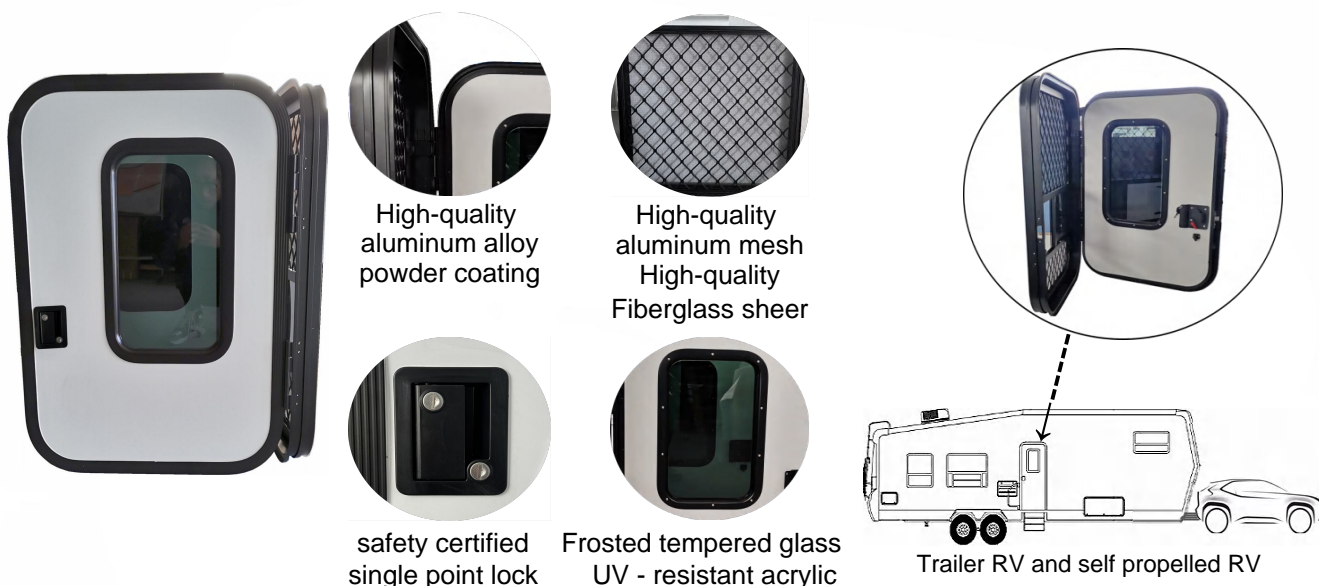

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Door panel: white anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass/UV - resistant acrylic glass. (Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: safety certified single point lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Specification parameters


Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Installation diagram

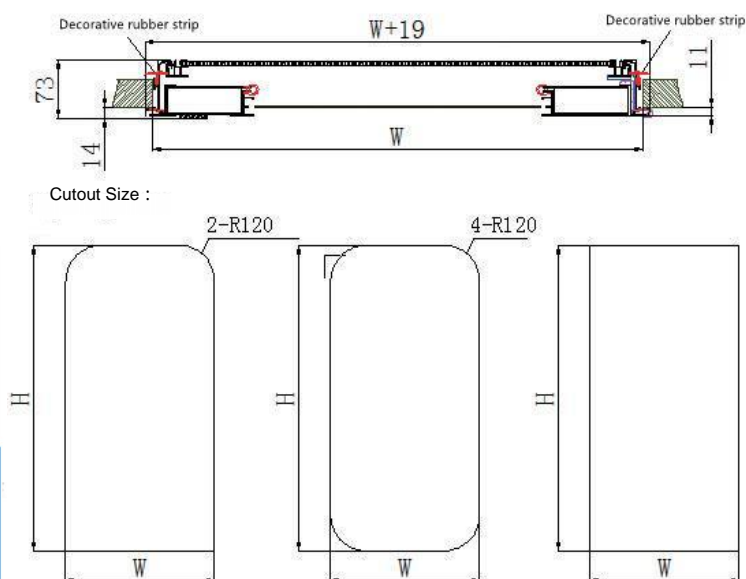

Main applications

Trailer RV and self-propelled RV, suitable for wall thickness of 30~60mm.

Specification

2R L Black

SLD-W-H- 4R - - White

4S R Silver gray (custom)

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray: Color of door frame

Accessories: Decorative rubber strip.

Optional parts: Door stop

(Optional items must be ordered separately)



Door stop



SED Single point electronic card lock RV Door



Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Door panel: white anti-ultraviolet composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass/UV - resistant acrylic glass. (Optional)

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: Single point electronic card lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Specification parameters


Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm.

Installation diagram

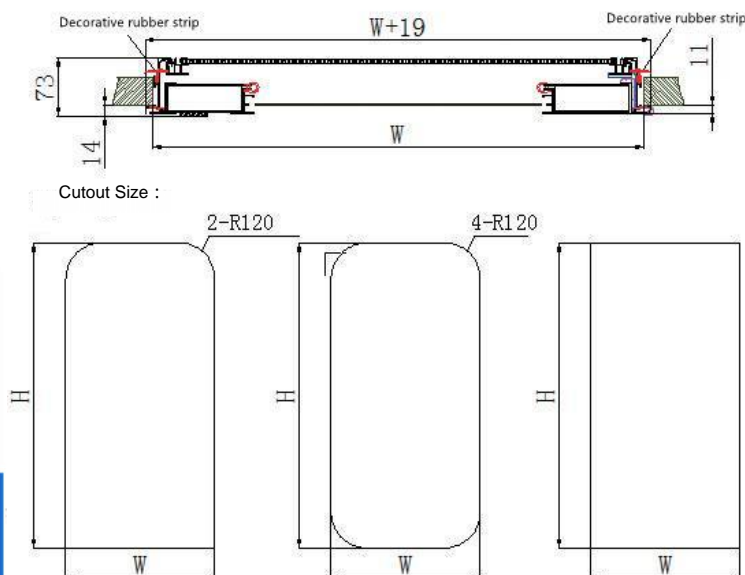

Main applications

Camp type trailer special, suitable for wall thickness of 30~60mm.

Specification

2R L Black
SED-W-H- 4R - - White
4S R Silver gray (custom)

SED: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray: color of door frame

Accessories: Decorative rubber strip.

Optional parts: Door Stop.


(Optional items must be ordered separately)

Door Stop:






SPD Single point password lock RV Door

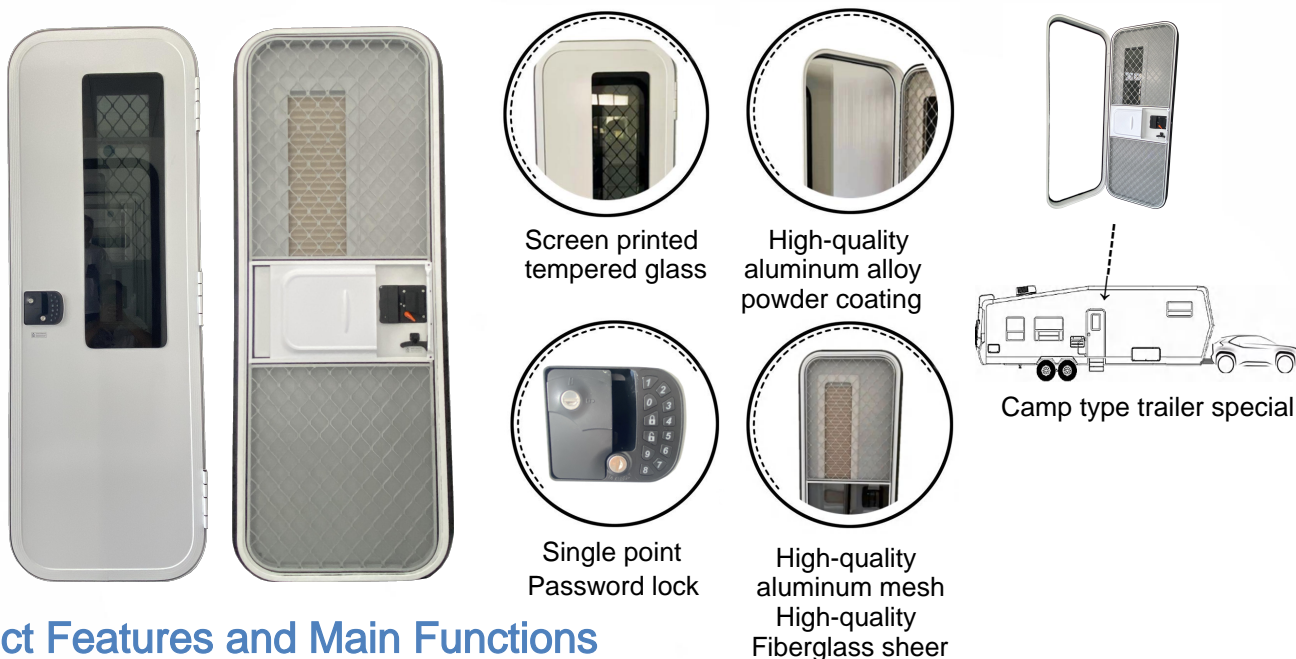

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.
Normal colors: black and white; **Customized colors:** silver grey, etc.
Door panel: white anti-ultraviolet composite sandwich panel (other colors can be customized).
Glass: Screen printed tempered glass
Screen Door: High-quality aluminum mesh and High-quality Fiberglass sheer.
Privacy Curtain: Folding blackout curtain.
Door lock: Single point password lock.
Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.
Optional: see specification for details.

Installation diagram

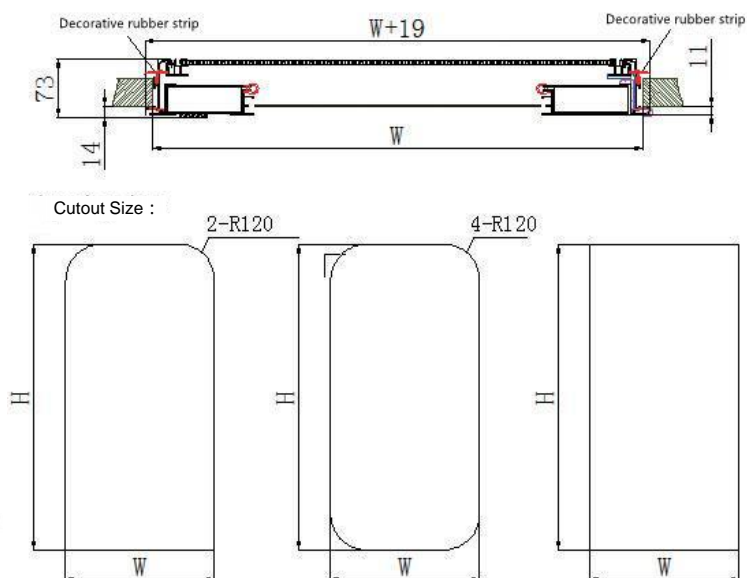

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm.

Main applications

Camp type trailer special,
suitable for wall thickness of 30~60mm.

Specification

2R L Black
 SPD-W-H- 4R - - White
 4S R Silver gray (custom)

SPD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray: color of door frame

Accessories: Decorative rubber strip.

Optional parts: Door Stop.

(Optional items must be ordered separately)

Door Stop:





SLD Single point lock RV Door with Tophung Hinged window



High-quality
aluminum alloy
powder coating



High-quality
aluminum mesh
High-quality
Fiberglass sheer



safety certified
single point lock



Double Glaze acrylic
Tophung Hinged window



Trailer RV and self propelled RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Door panel: white anti-ultraviolet composite sandwich panel
(other colors can be customized).

Glass: Double Glaze acrylic Tophung Hinged window
(E-mark Certified) .

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: safety certified single point lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Specification parameters


Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.


W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Installation diagram

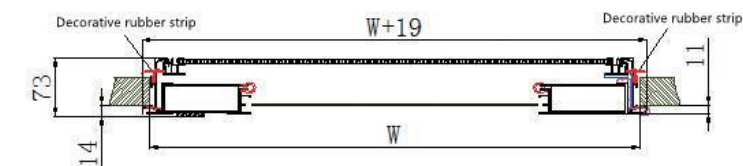

Cutout Size :

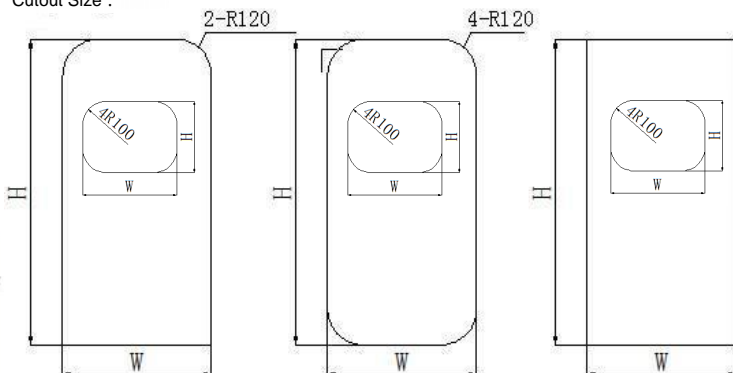

Main applications

Trailer RV and self-propelled RV,
suitable for wall thickness of 30~60mm.

Specification

2R L Black

SLD-W-H- 4R - - White

4S R Silver gray (custom)

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray: Color of door frame

Accessories: Decorative rubber strip.

Optional parts: Door stop

(Optional items must be ordered separately)



Door stop



SLD Single point lock RV Door with Vertical Sliding window




High-quality
aluminum alloy
powder coating




High-quality
aluminum mesh
High-quality
Fiberglass sheer



safety certified
single point lock



Tempered glass
Vertical Sliding window



Trailer RV and self propelled RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Door panel: white anti-ultraviolet composite sandwich panel
(other colors can be customized).

Glass: Tempered glass Vertical Sliding window/Sliding window.

Aluminum mesh: High-quality aluminum mesh.

Gauze curtain: High-quality Fiberglass sheer.

Door lock: safety certified single point lock.


Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.


Main applications

Trailer RV and self-propelled RV,
suitable for wall thickness of 30~60mm.

Installation diagram

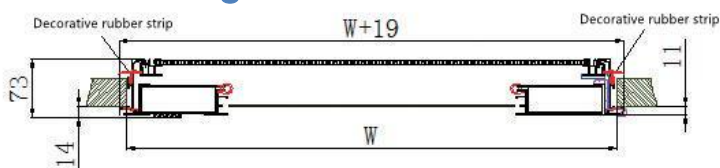

Cutout Size :

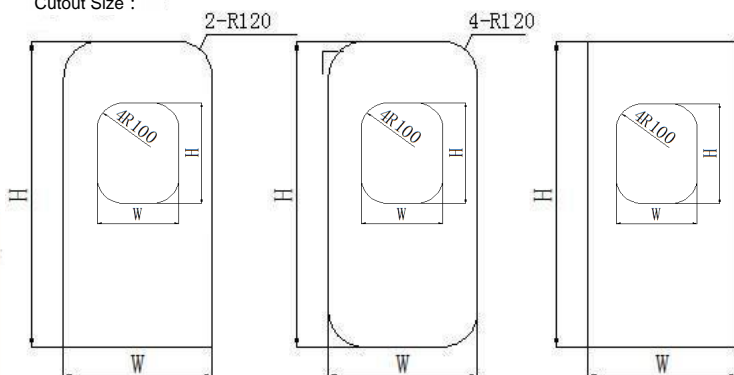

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to
customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

2R L Black -S

SLD-W-H- 4R - - White -TS

4S R Silver gray (custom)

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray: Color of door frame

S: Vertical Sliding window

TS: Sliding window

Accessories: Decorative rubber strip.

Optional parts: Door stop

(Optional items must be ordered separately)



Door stop



SLD Single point lock RV Door with GLASS



High-quality
aluminum alloy
powder coating



High-quality
aluminum mesh
High-quality
Fiberglass sheer



safety certified
single point lock



Screen printed
Tempered glass



Trailer RV and
self propelled RV

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.
Normal colors: black and white; **Customized colors:** silver grey, etc. **Door panel:** white anti-ultraviolet composite sandwich panel
(other colors can be customized).

Glass: Screen printed tempered glass.

Screen Door: High-quality aluminum mesh and
High-quality Fiberglass sheer.

Privacy Curtain: Folding blackout curtain.

Door lock: safety certified single point lock.

Structure: The door structure is unique. The outer door and screen door can be combined and separated. The door has opening, closing, locking, ventilation, light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance.

Lightweight structure, easy installation and use, firm and durable, Various models.

Optional: see specification for details.

Specification parameters

Regular Size W-H	Product Size/mm (W+19)-(H+19)	Cutout Size/mm (W)-(H)
622-1822	641-1841	622-1822
625-1750	644-1769	625-1750
625-1700	644-1719	625-1700
600-1600	619-1619	600-1600
600-1500	619-1519	600-1500
600-1350	619-1369	600-1350
650-1100	669-1119	650-1100
650-900	669-919	650-900
580-1750	599-1769	580-1750
530-1430	549-1449	530-1430

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;

H: Height of the door mounting surface, unit mm;

Specification

2R L Black
SLD-W-H- 4R - - White
4S R Silver gray (custom)

SLD: Specifications and models of doors

2R: A door with two rounded corners

4R: A door with four rounded corners

4S: A door with four right Angle

L: The hinges are on the left side of the door

R: The hinge is on the right side of the door

Black/White/Silver gray: Color of door frame

Accessories: Decorative rubber strip.

Optional parts: Door stop

Rectangular glass

(Optional items must be ordered separately)

Door stop


Rectangular glass:




Main applications

Trailer RV and self-propelled RV,
suitable for wall thickness of 30~60mm.

Installation diagram



Cutout Size :

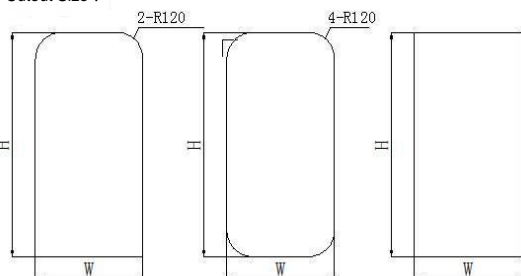



Specification parameters

Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W) - (H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Glass: 4mm toughened glass (3C、E-mark、DOT certified) or single layer UV resistant acrylic glass.

Open: Fixed window, not open.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.



Main applications

Used in Rv .

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-90mm.

Installation diagram

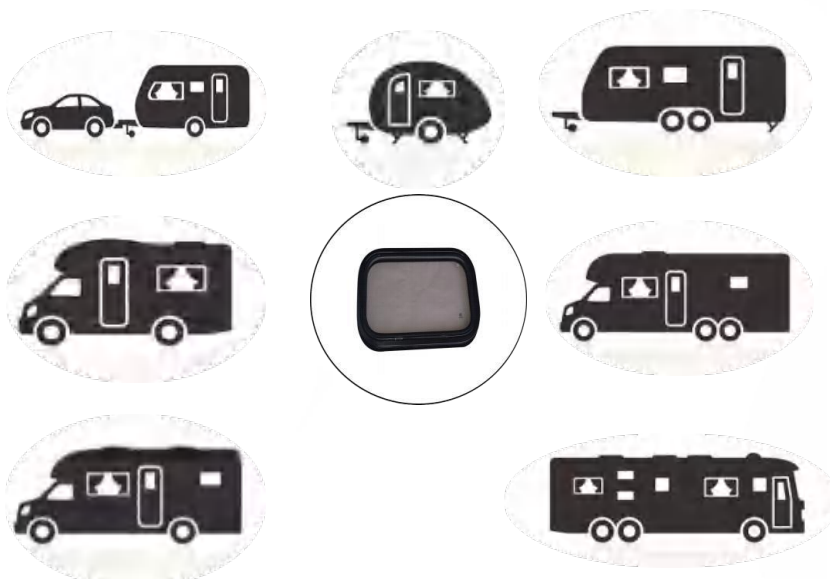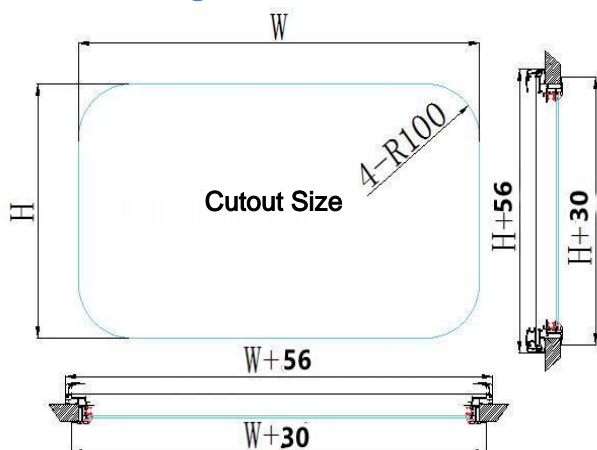

Applicable to all types of RV



High-quality
Aluminum alloy
Powder coating



4mm toughened glass
Single layer
UV resistant acrylic glass



High-quality glass fiber
Gauze curtain
Shading curtain integration

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Glass: 4mm toughened glass (3C、E-mark、DOT certified) or single layer UV resistant acrylic glass.

Open: push-pull type open, one side glass can push pull.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

Screen windows and sunshades:




Pull down: Open the sunshades



Push up: Open the Screen windows

Installation diagram

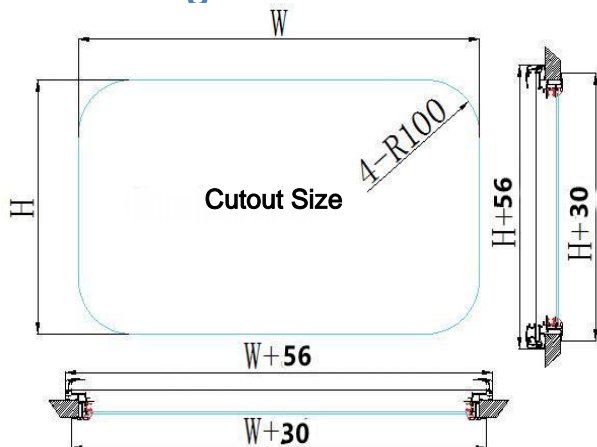

Specification parameters

Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W) - (H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Specifications can be customized according to customer requirements.

W: Width of Windowmounting surface, unit mm;

H: Height of the Window mounting surface,unit mm.

Main applications

Used in Rv .

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness:30-90mm.



Applicable to all types of RV



SW Double Sliding window

Specification parameters

Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W) - (H)
700-500	730-530	700-500
800-450	830-480	800-450
900-500	930-530	900-500

Specifications can be customized according to customer requirements.

W: Width of Windowmounting surface, unit mm;

H: Height of the Window mounting surface,unit mm.



High-quality
Aluminum alloy
Powder coating



Double layer
UV resistant acrylic
glass




High-quality glass fiber
Gauze curtain
Shading curtain integration

Main applications

Used in RV or Buildings,

Different installation frames are suitable for
different wall thicknesses;

Total applicable range of wall thickness:30-80mm.



Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.


Normal colors: black and white;**Customized colors:** silver grey, etc.

Glass: Double layer UV resistant acrylic glass. (E-MARK certified)

Open: push-pull type open, one side glass can push pull.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options:High-quality glass fiber gauze curtain and shading curtain integration.

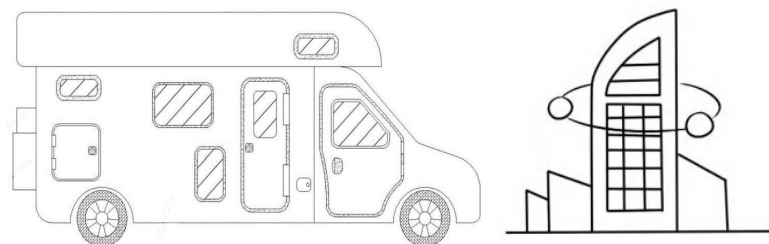

Used in RV or buildings


Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows

Installation diagram

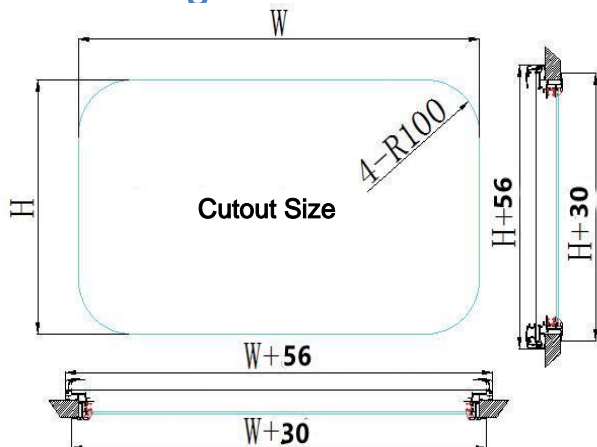

Applicable to all types of RV



HW double Tophung Hinged window (Rounded corners)



High-quality
Aluminum alloy
Powder coating



Double layer
acrylic



Support bar



Screen windows
sunshades

Specification parameters

Regular Size W-H	Product Size/mm (W+28)-(H+28)	Cutout Size/mm (W)-(H)
400-300	428-328	400-300
500-300	528-328	500-300
500-350	528-378	500-350
500-400	528-428	500-400
500-450	528-478	500-450
500-500	528-528	500-500
550-400	578-428	550-400
550-450	578-478	550-450
550-500	578-528	550-500
600-300	628-328	600-300
600-350	628-378	600-350
600-450	628-478	600-450
600-500	628-528	600-500
600-550	628-578	600-550
600-600	628-628	600-600
700-300	728-328	700-300
700-400	728-428	700-400
700-450	728-478	700-450
700-500	728-528	700-500
700-550	728-578	700-550
750-400	778-428	750-400
750-450	778-478	750-450
800-350	827-378	800-350
800-400	828-428	800-400
800-450	828-478	800-450
800-500	828-528	800-500
800-600	828-628	800-600
800-700	828-728	800-700
800-800	828-828	800-800
850-450	878-478	850-450
900-300	928-328	900-300
900-350	928-378	900-350
900-450	928-478	900-450
900-500	928-528	900-500
900-550	928-578	900-550
900-900	928-928	900-900
950-450	978-478	950-450
950-500	978-528	950-500
1000-450	1028-478	1000-450
1000-500	1028-528	1000-500
1000-600	1028-628	1000-600
1000-800	1028-828	1000-800
1100-450	1128-478	1100-450
1100-500	1128-528	1100-500
1100-550	1128-578	1100-550
1200-300	1228-328	1200-300
1200-350	1228-378	1200-350
1200-400	1228-428	1200-400
1200-500	1228-528	1200-500
1200-600	1228-628	1200-600
1220-705	1248-733	1220-705
1300-550	1328-578	1300-550
1450-500	1478-528	1450-500
1450-550	1478-578	1450-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Glass: Double layer UV resistant acrylic glass. (E-MARK certified)

Open: The window is equipped with support rods, which can be extended to open at two angles. The maximum opening angle varies depending on the size of the opening. There are three options: gear, knob, and gas support rod; The maximum opening angle can reach 80 degrees.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows


Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.

Installation diagram

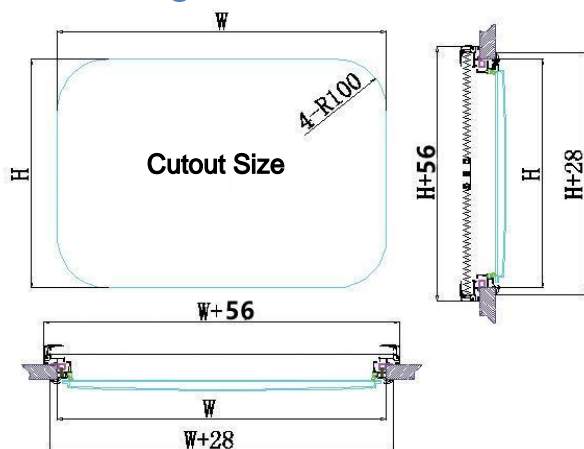



HW double Tophung Hinged window (Right Angle)



High-quality
Aluminum alloy
Powder coating



Double layer
acrylic



Support bar



Screen windows
sunshades

Specification parameters

Regular Size W-H	Product Size/mm (W+50)-(H+50)	Cutout Size/mm (W)-(H)
350-280	400-330	350-280
400-300	450-350	400-300
500-300	550-350	500-300
500-350	550-400	500-350
500-400	550-450	500-400
500-450	550-500	500-450
500-500	550-550	500-500
550-400	600-450	550-400
550-450	600-500	550-450
550-500	600-550	550-500
600-300	650-350	600-300
600-350	650-400	600-350
600-450	650-500	600-450
600-500	650-550	600-500
600-550	650-600	600-550
600-600	650-650	600-600
700-300	700-350	700-300
700-400	750-450	700-400
700-450	750-500	700-450
700-500	750-550	700-500
700-550	750-600	700-550
750-400	800-450	750-400
750-450	800-500	750-450
800-350	850-400	800-350
800-400	850-450	800-400
800-450	850-500	800-450
800-500	850-550	800-500
800-600	850-650	800-600
800-700	850-750	800-700
800-800	850-850	800-800
850-450	900-500	850-450
900-300	950-350	900-300
900-350	950-400	900-350
900-450	950-500	900-450
900-500	950-550	900-500
900-550	950-600	900-550
900-900	950-950	900-900
950-450	1000-500	950-450
950-500	1000-550	950-500
1000-450	1050-500	1000-450
1000-500	1050-550	1000-500
1000-600	1050-650	1000-600
1000-800	1050-850	1000-800
1100-450	1150-500	1100-450
1100-500	1150-550	1100-500
1100-550	1150-600	1100-550
1200-300	1250-350	1200-300
1200-350	1250-400	1200-350
1200-400	1250-450	1200-400
1200-500	1250-550	1200-500
1200-600	1250-650	1200-600
1220-705	1270-755	1220-705
1300-550	1350-600	1300-550
1450-500	1500-550	1450-500
1450-550	1500-600	1450-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Glass: Double layer UV resistant acrylic glass. (E-MARK certified)

Open: The window is equipped with support rods, which can be extended to open at two angles. The maximum opening angle varies depending on the size of the opening. There are three options: gear, knob, and gas support rod; The maximum opening angle can reach 80 degrees.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows


Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.

Installation diagram

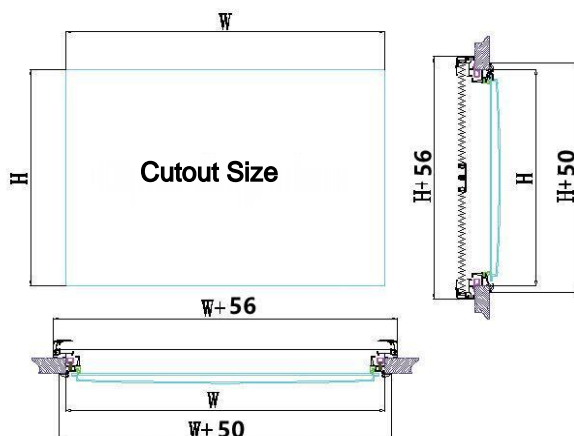



HW Tophung Hinged window (rounded corner single Toughened glass)



High-quality
Aluminum alloy
Powder coating



4mm
toughened
glass



Support bar



Screen windows
sunshades

Specification parameters

Regular Size W-H	Product Size/mm (W+28)-(H+28)	Cutout Size/mm (W)-(H)
400-300	428-328	400-300
500-300	528-328	500-300
500-350	528-378	500-350
500-400	528-428	500-400
500-450	528-478	500-450
500-500	528-528	500-500
550-400	578-428	550-400
550-450	578-478	550-450
550-500	578-528	550-500
600-300	628-328	600-300
600-350	628-378	600-350
600-450	628-478	600-450
600-500	628-528	600-500
600-550	628-578	600-550
600-600	628-628	600-600
700-300	728-328	700-300
700-400	728-428	700-400
700-450	728-478	700-450
700-500	728-528	700-500
700-550	728-578	700-550
750-400	778-428	750-400
750-450	778-478	750-450
800-350	827-378	800-350
800-400	828-428	800-400
800-450	828-478	800-450
800-500	828-528	800-500
800-600	828-628	800-600
800-700	828-728	800-700
800-800	828-828	800-800
850-450	878-478	850-450
900-300	928-328	900-300
900-350	928-378	900-350
900-450	928-478	900-450
900-500	928-528	900-500
900-550	928-578	900-550
900-900	928-928	900-900
950-450	978-478	950-450
950-500	978-528	950-500
1000-450	1028-478	1000-450
1000-500	1028-528	1000-500
1000-600	1028-628	1000-600
1000-800	1028-828	1000-800
1100-450	1128-478	1100-450
1100-500	1128-528	1100-500
1100-550	1128-578	1100-550
1200-300	1228-328	1200-300
1200-350	1228-378	1200-350
1200-400	1228-428	1200-400
1200-500	1228-528	1200-500
1200-600	1228-628	1200-600
1220-705	1248-733	1220-705
1300-550	1328-578	1300-550
1450-500	1478-528	1450-500
1450-550	1478-578	1450-550

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Glass: 4mm toughened glass. (3C、E-MARK、DOT certified)

Open: The window is equipped with support rods, which can be extended to open at two angles. The maximum opening angle varies depending on the size of the opening. There are three options: gear, knob, and gas support rod; The maximum opening angle can reach 80 degrees.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows


Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.

Installation diagram

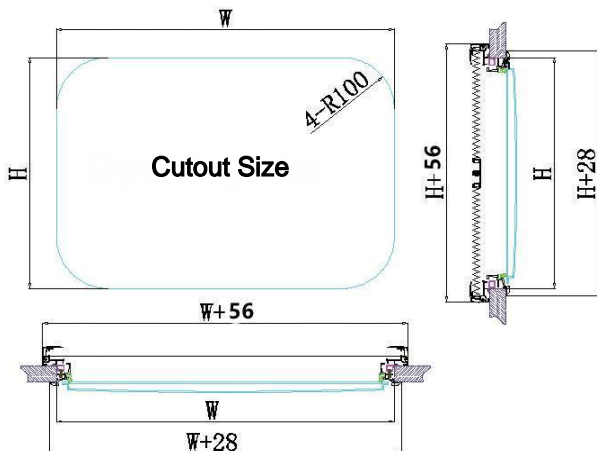


Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.




SW Sliding window (one side built-in screen window)



High-quality
Aluminum alloy
Powder coating



4mm toughened glass



One side built-in
screen window

Specification parameters

Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W) - (H)
500-300	530-330	500-300
500-350	530-380	500-350
500-400	530-430	500-400
500-450	530-480	500-450
500-500	530-530	500-500
550-400	580-430	550-400
600-500	630-530	600-500
700-400	730-430	700-400
700-450	730-480	700-450
700-500	730-530	700-500
700-550	730-580	700-550
750-400	780-430	750-400
750-430	780-460	750-430
800-450	830-480	800-450
800-500	830-530	800-500
800-600	830-630	800-600
800-700	830-730	800-700
800-800	830-830	800-800
900-450	930-480	900-450
900-500	930-530	900-500
1000-450	1030-480	1000-450
1000-500	1030-530	1000-500
1000-600	1030-630	1000-600
1100-450	1130-480	1100-450
1100-500	1130-530	1100-500
1200-300	1230-330	1200-300
1200-500	1230-530	1200-500
1300-550	1330-580	1300-550

Specifications can be customized according to customer requirements.

W: Width of Windowmounting surface, unit mm;

H: Height of the Window mounting surface,unit mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;**Customized colors:** silver grey, etc.

Glass: 4mm toughened glass (3C、E-mark、DOT certified)

Open: push-pull type open, one side glass can push pull.

Gauze curtain: One side built-in screen window

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance.The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.


Main applications

Used in Rv .

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness:30-80mm.

Installation diagram

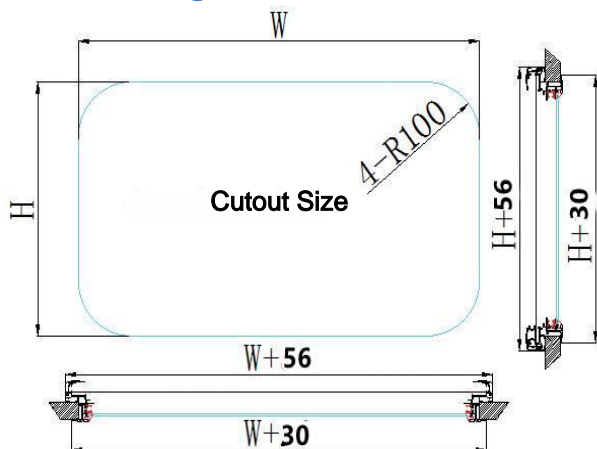

Applicable to all types of RV



SW Vertical Sliding window



High-quality
Aluminum alloy
Powder coating



4mm toughened glass

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Glass: 4mm toughened glass (3C、E-mark、DOT certified)

Open: Lift open, one side glass can lift.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

One side built-in screen window

Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows

One side built-in screen window :



→ One side built-in screen window

Main applications

Used in Rv .

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



Applicable to all types of RV

Specification parameters


Regular Size W-H	Product Size/mm (W+30)-(H+30)	Cutout Size/mm (W) - (H)
300-500	330-530	300-500
350-500	380-530	350-500
400-500	430-530	400-500
450-500	480-530	450-500
500-500	530-530	500-500
400-550	430-580	400-550
500-600	530-630	500-600
400-700	430-730	400-700
450-700	480-730	450-700
500-700	530-730	500-700
550-700	580-730	550-700
400-750	430-780	400-750
430-750	460-780	430-750
450-800	480-830	450-800
500-800	530-830	500-800
600-800	630-830	600-800
700-800	730-830	700-800
800-800	830-830	800-800
450-900	480-930	450-900
500-900	530-930	500-900
450-1000	480-1030	450-1000
500-1000	530-1030	500-1000
600-1000	630-1030	600-1000
450-1100	480-1130	450-1100
500-1100	530-1130	500-1100
300-1200	330-1230	300-1200
500-1200	530-1230	500-1200
550-1300	580-1330	550-1300

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.

Installation diagram

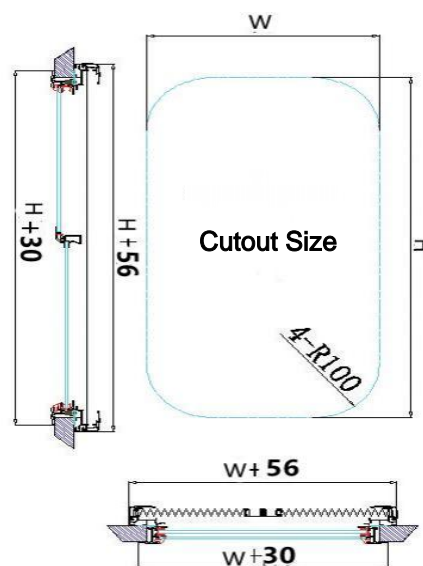




VENT exhaust fan



Privacy transparent
lighting material



White anti-ULTRAVIOLET
ASA material



Gauze

Specification parameters

Regular Size W-H	Product Size/mm (W+78)-(H+78)	Cutout Size/mm (W)-(H)
280-280	358-358	280-280

Specifications can be customized according to customer requirements.

W: Width of VENT exhaust fan mounting surface, unit mm;

H: Height of the VENT exhaust fan mounting surface, unit mm.

Main applications

RV and self-propelled trailers.

Suitable for wall thickness of 25-65mm.

Product Features and Main Functions

Fan body: White anti-ULTRAVIOLET ASA material,



Top of the exhaust fan : Private transparent lighting material

Motor: The newly developed 12V and 20W DC motor is equipped with temperature control system to prevent overheating of the motor from affecting its service life.

Use: Simply press a button and ventilator can provide fresh air (air intake) and ventilation (air exhaust) to the car. Rain and snow weather can be closed in the case of the cover, still achieve ventilation function.

Main function: The exhaust fan has the characteristics of opening, closing, locking, ventilation, light transmission, Insect prevention and good waterproof performance. Light structure, easy to install and use, firm and durable, various models.


Installation diagram

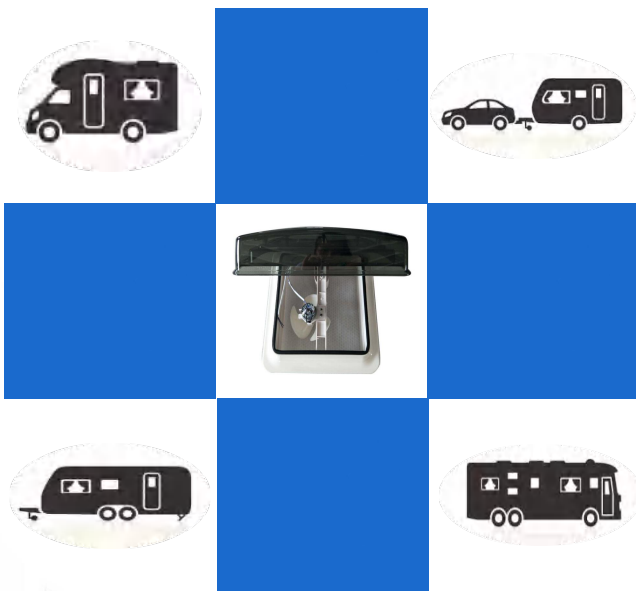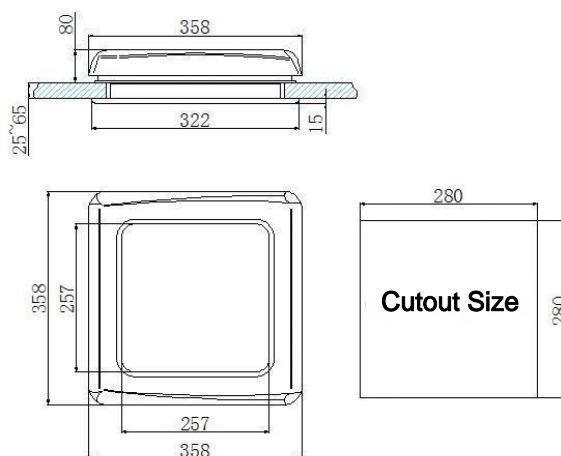


RV and self-propelled trailers



VENT Ventilator




Resistant to yellowing
Engineering materials



Forward and reverse
Low noise motor



Stainless steel support rod



Insect screen

Specification parameters

Regular Size W-H	Product Size/mm (W+80)-(H+80)	Cutout Size/mm (W)-(H)
280-280	360-360	280-280
340-340	420-420	340-340
400-400	480-480	400-400

Specifications can be customized according to customer requirements.
(W-H 340 size is suitable for the 340-360 interval size)

W: Width of Ventilator mounting surface, unit mm;

H: Height of the Ventilator mounting surface, unit mm.

Main applications

Trailer and self-propelled RVs.

The applicable wall thickness is 38-95mm.

The standard installation thickness of the lifting frame is 50-95mm

The installation thickness that needs to be adjusted for the lifting frame is 38-50mm

Product Features and Main Functions

Fan body: Yellow resistant engineering material with characteristics such as oxidation resistance and aging resistance,

Insect screen: It can effectively prevent mosquitoes, insects, sand, and stones from entering the interior of the RV.

Motor: Low decibel operation; When breathing, you can fall asleep peacefully; It can be ventilated by either exhaust or inlet.

Support rod: stainless steel support rod

Main function: The exhaust fan has the characteristics of opening, closing, locking, ventilation, light transmission, Insect prevention and good waterproof performance Light structure, easy to install and use, firm and durable, various models.

Optional:

Manual: with/without light

Electric: with lights




Installation diagram

Manual/Electric Ventilator




Manual Ventilator



Rain sensing: None
Connect to remote panel: None
One click window opening: None
Size and air volume adjustment: None
(Optional: 3rd gear, 6th gear)
Remote control function: None
Driving window closing: None
Number of support rods: 1 piece
High temperature automatic window opening: None
In/out ventilation: Yes
LED lighting: Optional



Electric Ventilator

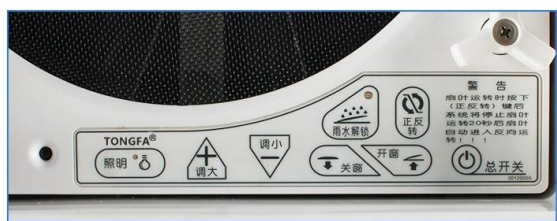

Rain sensing: Yes
Connect to remote panel: Optional
One click window opening: Yes
Remote control function: Yes
Size and air volume adjustment: Yes
High temperature automatic window opening: Yes
Driving window closing: Yes
Number of support rods: 2piece
In/out ventilation: Yes
LED lighting: Yes



The layout of the operation panel may vary slightly according to the actual situation, and the actual product shall prevail



HW Arc Tophung Hinged window



Double layer UV
resistant acrylic



High-quality
Aluminum alloy profile
Powder coating



support rod



High-quality
Glass fiber Gauze curtain
Shading curtain integration

Specification parameters

Regular Size W-H	Product Size/mm (W+56)-(H+54)	Cutout Size/mm (W)-(H)
280-380	336-434	280-380
490-500	546-554	490-500
600-450	656-504	600-450
750-455	806-504	750-455
818-315	874-365	818-315
900-400	956-454	900-400
900-450	956-504	900-450
985-465	1041-519	985-465
960-450	1016-504	960-450

Specifications can be negotiated and customized according to user requirements.

W: Width of window mounting surface, unit: mm;

H: Arc length height of window mounting surface, unit: mm.

Main applications

RV

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



Windows are suitable for special requirements of RV

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.

Glass: Double layer uv - resistant acrylic glass.

Open: The window is equipped with support rods, which can be pushed to open two angles, and can open up to 65 degrees.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, shading, Insect prevention , sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows). Light structure, easy to install and use, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.


Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows

Installation diagram

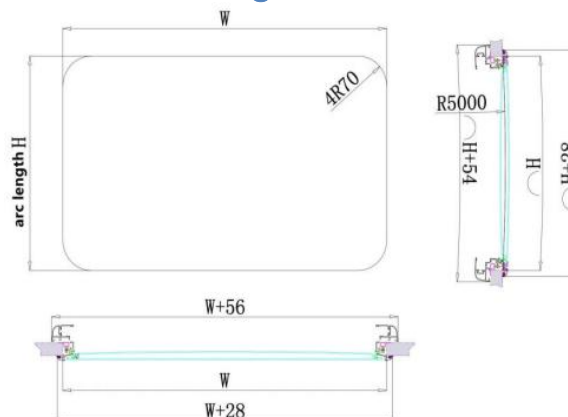




SK RV Skylight (right angle)



Double layer
UV resistant acrylic



High-quality
Aluminum alloy profile,
Powder coating



Gas support rod



High-quality
Glass fiber Gauze curtain
Shading curtain integration

Specification parameters

Regular Size W-H	Product Size/mm (W+127)-(H+127)	Cutout Size/mm (W)-(H)
450-400	577-527	450-400
500-500	627-627	500-500
700-500	827-627	700-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.

Glass: Double layer uv - resistant acrylic glass.

Open: The air brace can open up to 65°.

Main function: The window has the functions of opening, closing, ventilating, transmitting light, shading, prevention insect, sound insulation, heat insulation, privacy and good waterproof performance. Light structure, easy to install and use, firm and durable.

Options: High-quality glass fiber gauze curtain and shading curtain integration.




Screen windows and sunshades:



sunshades

Screen windows

Installation diagram

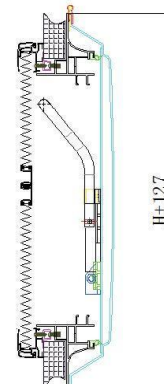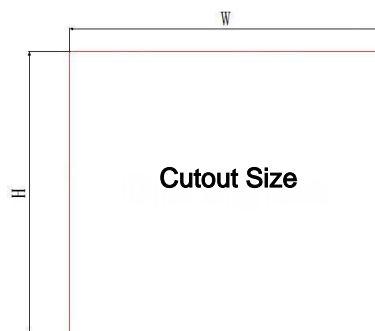

Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;


Total applicable range of wall thickness: 30-80mm.



SK Right angle RV Skylight (remote control light)



Double layer
UV resistant acrylic



High-quality
Aluminum alloy profile,
Powder coating



Gas support rod



High-quality
Glass fiber Gauze curtain
Shading curtain integration
(with light)

Specification parameters

Regular Size W-H	Product Size/mm (W+127)-(H+127)	Cutout Size/mm (W)-(H)
450-400	577-527	450-400
500-500	627-627	500-500
700-500	827-627	700-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface,unit mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.

Glass: Double layer uv - resistant acrylic glass.

Open: The air brace can open up to 65°.

Screen windows and sunshades:High-quality glass fiber gauze curtain and shading curtain integration (with light) .

Light: A small light control key controls the opening and closing of the light

Main function: The window has the functions of opening,closing, ventilating, transmitting light, shading,prevention insect , sound insulation, heat insulation, privacy and good waterproof performance. Light structure, easy to install and use, firm and durable.




Screen windows and sunshades (with light) :



Screen windows

sunshades

Installation diagram

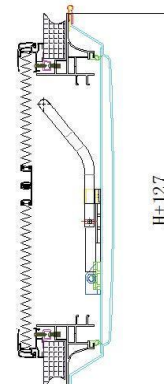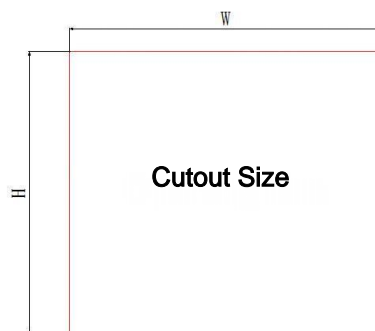

Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



SK RV Skylight (Rounded corners)



Double layer
UV resistant acrylic



High-quality
Aluminum alloy profile,
Powder coating



Gas support rod



High-quality
Glass fiber Gauze curtain
Shading curtain integration

Specification parameters

Regular Size W-H	Product Size/mm (W+120.6)-(H+120.6)	Cutout Size/mm (W)-(H)
450-400	570.6-520.6	450-400
500-500	620.6-620.6	500-500
700-500	820.6-620.6	700-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.

Glass: Double layer uv - resistant acrylic glass.

Open: The air brace can open up to 90°.

Main function: The window has the functions of opening, closing, ventilating, transmitting light, shading, prevention insect, sound insulation, heat insulation, privacy and good waterproof performance. Light structure, easy to install and use, firm and durable.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

High-quality glass fiber gauze curtain and shading curtain integration With light .

Screen windows and sunshades:



sunshades

Screen windows


Screen windows and sunshades With light:



Screen windows

sunshades

Installation diagram

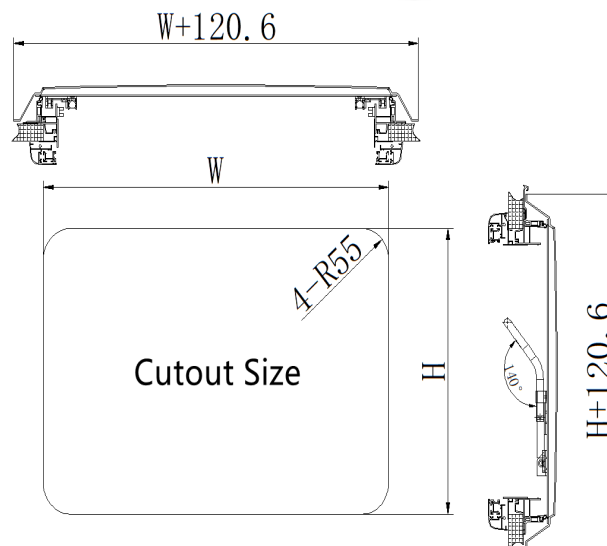

Main applications


Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



SK RV Curved Skylight



Double layer
UV resistant acrylic



High-quality
Aluminum alloy profile,
Powder coating



Gas support rod



High-quality
Glass fiber Gauze curtain
Shading curtain integration

Specification parameters

Regular Size W-H	Product Size/mm (W+404)-(H+56)	Cutout Size/mm (W)-(H)
900-600	1304-656	900-600

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Arc length height of window mounting surface, unit:mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.

Glass: Double layer uv - resistant acrylic glass.

Open: The air brace can open up to 65°.

Main function: The window has the functions of opening,closing, ventilating, transmitting light, shading,prevention insect , sound insulation, heat insulation, privacy and good waterproof performance. When curtains and Windows are open, they can be used as emergency exits (except for small Windows)Light structure, easy to install and use, firm and durable.

Options:High-quality glass fiber gauze curtain and shading curtain integration.

High-quality glass fiber gauze curtain and shading curtain integration With light .

Screen windows and sunshades:



sunshades

Screen windows


Screen windows and sunshades With light:



Screen windows

sunshades

Installation diagram

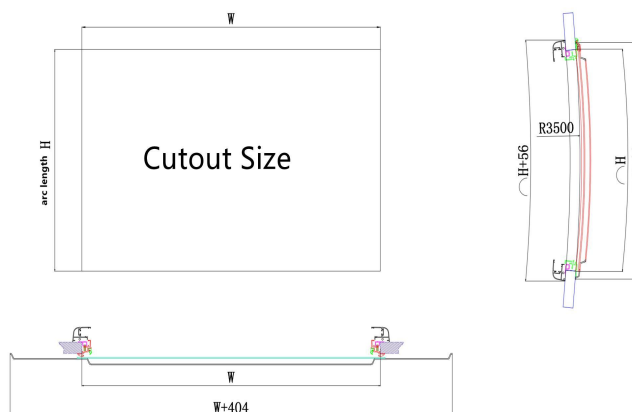

Main applications


Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.



SK RV Starry sky window

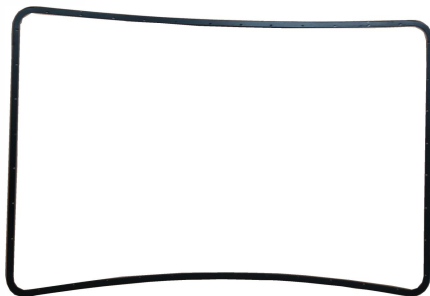


4mm
Toughened glass



High-quality
Aluminum alloy profile,
Powder coating

Application scenario



Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
1200-1900	1226-1926	1200-1900

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Arc length height of window mounting surface, unit:mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.

Glass: 4mm toughened glass (3C、E-mark、DOT certified)

Open: Fixed window, not open.


Main function: The window has light transmission, Insect prevention, sound insulation, heat insulation and good waterproof performance.The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Main applications

Used in RV or buildings,
Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.

Installation diagram

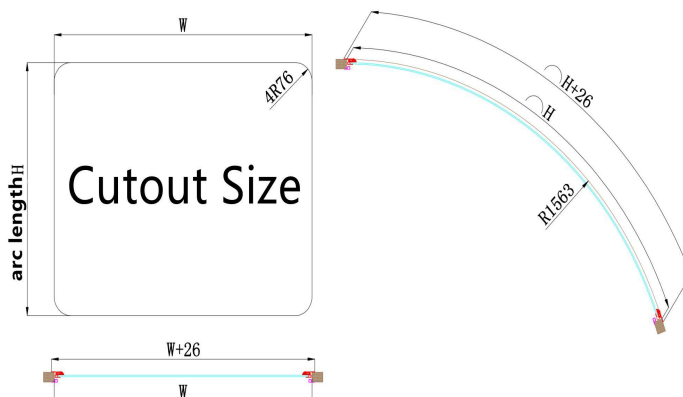



UV resistant acrylic glass



Support rod



High-quality
Aluminum alloy profile,
Powder coating

Specification parameters

Regular Size	Product Size/mm	Cutout Size/mm
W-H	(W+117)-(H+117)	(W)-(H)
704-504	821-621	704-504

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface,unit mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.


Normal colors : black , **Customized colors:** custom color.

Glass: Single-layer UV-resistant acrylic glass
Double-layer UV resistant acrylic glass (optional).
(E-mark certified)

Open: Gear support rod,Maximum opening 65 °
Air strut (optional)

Main function: The window has the functions of opening,closing, ventilation, light transmission, sound insulation, heat insulation, privacy and good waterproof performance. Lightweight structure, easy installation and use, firm and durable.

Installation diagram

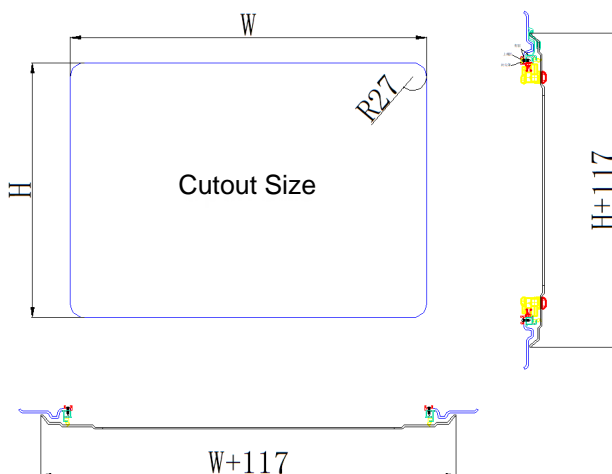

Main applications

Used for caravans or tents.

Applicable wall thickness is 4-6 mm,

Special wall thickness can be customized.



1332 Sliding/Vertical Sliding window (one side built-in screen window)





Specification parameters

Specifications can be customized according to customer requirements.

W: Width of Windowmounting surface, unit mm;

H: Height of the Window mounting surface,unit mm.


Installation diagram

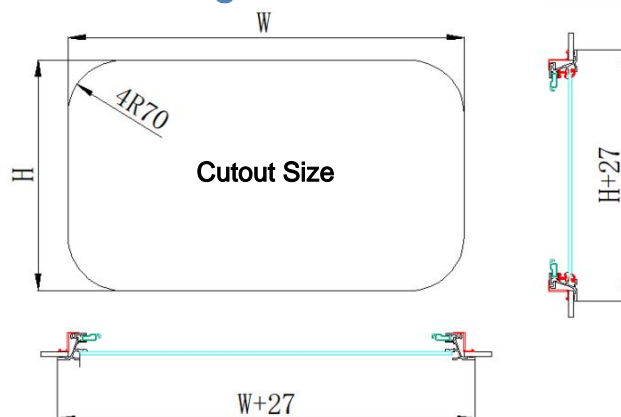

High-quality
Aluminum alloy
Powder coating



4mm
Toughened glass



One side built-in
screen window



Window lock

Main applications

Used in Rv .

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness:6-80mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;**Customized colors:** silver grey, etc.

Glass: 4mm toughened glass (3C、E-mark、DOT certified)

Open: Slide horizontally to open, One side glass is movable.

Gauze curtain: One side built-in screen window

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance.The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.


Specification parameters

Specifications can be customized according to customer requirements.

W: Width of Windowmounting surface, unit mm;

H: Height of the Window mounting surface,unit mm.

Installation diagram

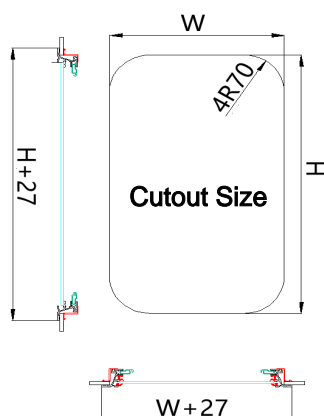

High-quality
Aluminum
alloyPowder
coating



4mm
Toughened glass



One side built-in
screen window



Window lock



Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;**Customized colors:** silver grey, etc.

Glass: 4mm toughened glass (3C、E-mark、DOT certified)

Open: Vertical sliding open, One side glass is movable.

Gauze curtain: One side built-in screen window

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance.The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Main applications

Used in Rv .

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness:6-80mm.



Specification parameters

Regular Size W-H	Product Size/mm (W+42)-(H+42)	Cutout Size/mm (W) - (H)
400-300	442-342	400-300
500-300	542-342	500-300
500-350	542-392	500-350
500-400	542-442	500-400
558-381	600-423	558-381
569-386	611-428	569-386
600-300	642-342	600-300
700-300	742-342	700-300
700-400	742-442	700-400
800-600	842-642	800-600
900-500	942-542	900-500
1000-500	1042-542	1000-500
1100-450	1142-492	1100-450
1200-300	1242-342	1200-300


Specifications can be customized according to customer requirements.
W: Width of Windowmounting surface, unit mm;
H: Height of the Window mounting surface,unit mm.




High-quality
Aluminum alloy
Powder coating



3mm
Toughened Glass



Metal support rod



Removable
Insect screen

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;**Customized colors:** silver grey, etc.

Glass: 3mm toughened glass (3C、E-mark、DOT certified)

Open: The window is equipped with support rods that can be pushed outward to open.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance.The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options:High strength fiberglass insect proof net that can be removed separately

Main applications


Used in Rv .

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness:40-41mm.

Other wall thicknesses can be customized

Installation diagram

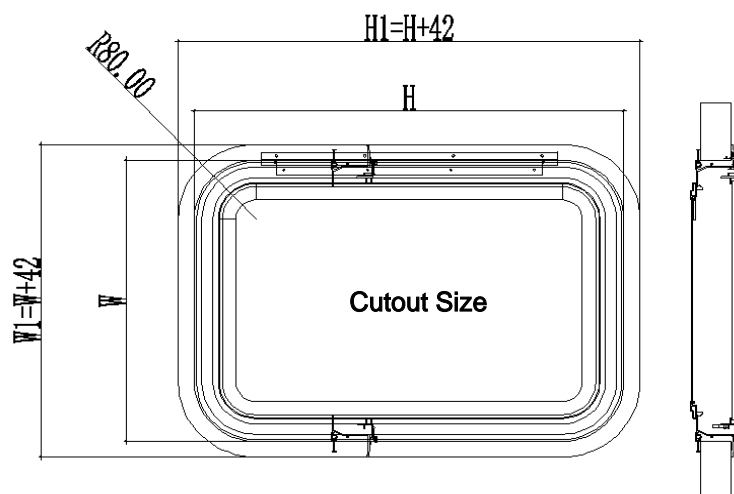

Applicable to all types of RV



SW Double round window

Specification parameters

Regular Size W-H	Product Size/mm (W+27)-(H+27)	Cutout Size/mm W-H
300-300	327.2-327.2	300-300

Specifications can be customized according to customer requirements.
W-H: The diameter of the window;unit mm.



Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white;**Customized colors:** silver grey, etc.

Glass: Double layer UV resistant acrylic glass.

(E-MARK certified)

Open: Fixed window, not open.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows

Main applications

Used in Rv .

Different installation frames are suitable for different wall thicknesses;


Total applicable range of wall thickness:30-90mm.

Usage scenario



Applicable to all types of RV

Installation diagram

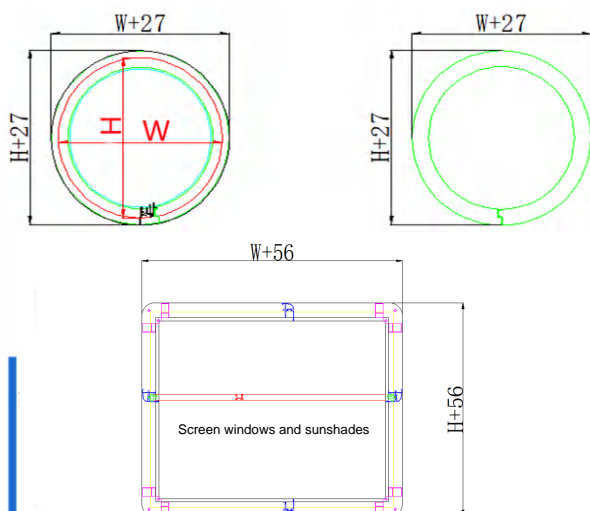



BW RV Tophung Hinged window



High-quality
Aluminum alloy
Powder coating



4mm
toughened
glass



Support bar



Window lock

Specification parameters

Regular Size W-H	Product Size/mm (W+39)-(H+39)	Cutout Size/mm (W)-(H)
400-300	439-339	400-300
500-300	539-339	500-300
500-350	539-389	500-350
500-400	539-439	500-400
500-450	539-489	500-450
500-500	539-539	500-500
550-400	589-439	550-400
550-450	589-489	550-450
550-500	589-539	550-500
600-300	639-339	600-300
600-350	639-389	600-350
600-450	639-489	600-450
600-500	639-539	600-500
600-550	639-589	600-550
600-600	639-639	600-600
700-300	739-339	700-300
700-400	739-439	700-400
700-450	739-489	700-450
700-500	739-539	700-500
700-550	739-589	700-550
750-400	789-439	750-400
750-450	789-489	750-450
800-350	839-389	800-350
800-400	839-439	800-400
800-450	839-489	800-450
800-500	839-539	800-500
800-600	839-639	800-600
800-700	839-739	800-700
800-800	839-839	800-800
850-450	889-489	850-450
900-300	939-339	900-300
900-350	939-389	900-350
900-450	939-489	900-450
900-500	939-539	900-500
900-550	939-589	900-550
900-900	939-939	900-900
950-450	989-489	950-450
950-500	989-539	950-500
1000-450	1039-489	1000-450
1000-500	1039-539	1000-500
1000-600	1039-639	1000-600
1000-800	1039-839	1000-800
1100-450	1139-489	1100-450
1100-500	1139-539	1100-500
1100-550	1139-589	1100-550
1200-300	1239-339	1200-300
1200-350	1239-389	1200-350
1200-400	1239-439	1200-400
1200-500	1239-539	1200-500
1200-600	1239-639	1200-600
1220-705	1259-744	1220-705
1300-550	1339-589	1300-550
1450-500	1489-539	1450-500
1450-550	1489-589	1450-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Glass: 4mm toughened glass. (3C, E-MARK, DOT certified)

Open: The window is equipped with support rods,

Main function: This window has light transmission, mosquito and insect resistance, sound insulation, heat insulation, and good waterproof performance. The window adopts three different installation methods: front gluing fixation, side screw fixation, and wall clamping. It is easy to install and use, with a lightweight, sturdy, and durable structure. The specifications can be customized.

Options: High-quality glass fiber gauze curtain and shading curtain integration.

3mm toughened glass (3C, E-mark, DOT certified)
Installation frame

Main applications

Suitable for various types of RVs.


Different installation frames are suitable for different wall thicknesses;

The applicable range of wall thickness is 25-80mm.

At present, the wall thickness is 25-30mm, and this thickness does not require the use of installation frames;

Wall thickness greater than 30mm requires optional installation frame

Installation diagram

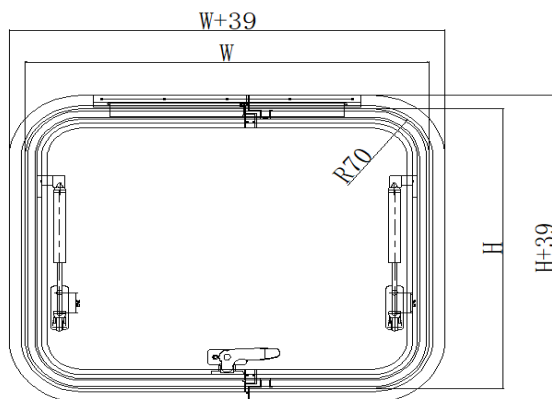

Customizable change of R-angle specifications



HW RV Tophung Hinged Flat window



High-quality
Aluminum alloy
Powder coating




Double layer
acrylic



Support bar



Screen windows
sunshades



Specification parameters

Regular Size W-H	Cutout Size/mm (W) -(H)
400-300	400-300
500-300	500-300
500-350	500-350
500-450	500-450
600-450	600-450
600-500	600-500
600-600	600-600
700-400	700-400
700-450	700-450
700-500	700-500
750-450	750-450
800-400	800-400
800-500	800-500
800-700	800-700
900-350	900-350
900-450	900-450
900-500	900-500
900-550	900-550
900-900	900-900
1000-500	1000-500
1000-800	1000-800
1100-450	1100-450
1100-550	1100-550
1200-300	1200-300
1200-500	1200-500
1200-600	1200-600
1300-550	1300-550
1450-550	1450-550

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.

Rounded corner dimensions=(W+28) - (H+28);

Right angle dimensions=(W+50) - (H+50);

Insect proof nets and blackout curtains dimensions=(W+56) - (H+56)

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** silver grey, etc.

Glass: Double flat UV resistant acrylic glass. (E-MARK certified)

Open: The window is equipped with support rods, which can be extended to open at two angles. The maximum opening angle varies depending on the size of the opening. There are three options: gear, knob, and gas support rod; The maximum opening angle can reach 80 degrees.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options: High-quality glass fiber gauze curtain and shading curtain integration.


Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;


Total applicable range of wall thickness: 30-80mm.

Installation diagram

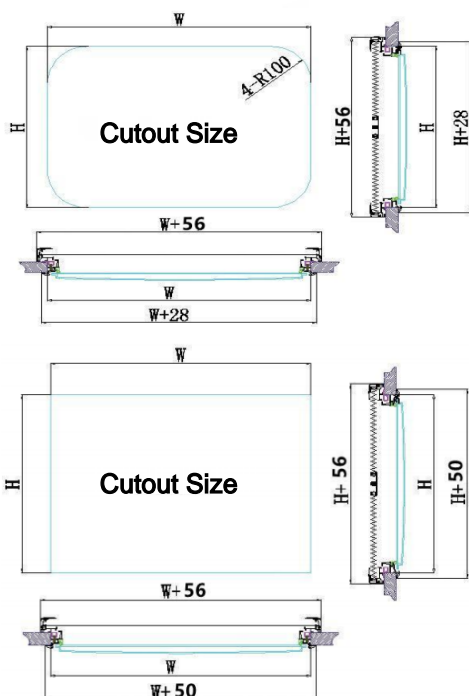



HD Storage door (Rounded corners)




American made self tensioning tongue lock



High-quality Aluminum alloy profiles



Anti-ULTRAVIOLET ASA Aluminum alloy composite sandwich panel



Aluminum alloy hinge

Product Features and Main Functions

Door frame: High-quality aluminum alloy profiles.

Panel: Anti-ULTRAVIOLET Aluminum alloy composite sandwich panel.

Door lock: American self - tensioning tongue lock.

Hinge: Aluminum alloy hinge.

Appearance: Powder coating,

Normal colors: white , **Customized colors:** custom color.

Main functions: The storage door is easy to install, firm and durable, has low requirements on the accuracy of opening size, beautiful appearance, can be opened at 180°, and can be customized according to customer requirements.

Main applications

Camp type trailer special,
suitable for wall thickness of 30~60mm.

Specification

T WH
B
HD-W-H- BL(custom)--4R
L GR(custom)
R

HD: Represents product code;

W-H: Represents the width * height of the product mounting surface;

T/B/L/R: The position of hinge is above/below/left/right of the storage door;

WH/BL/GR: The colors are white/black/silver gray.

4R: Storage door (Rounded corners)

Options: Storage door lock

Storage door lock:




Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
400-300	426-326	400-300
450-350	476-376	450-350
500-300	526-326	500-300
500-350	526-376	500-350
500-400	526-426	500-400
600-300	626-326	600-300
600-450	626-476	600-450
650-350	676-376	650-350
650-480	676-506	650-480
700-200	726-226	700-200
700-300	726-326	700-300
700-500	726-526	700-500
700-600	726-626	700-600
800-500	826-526	800-500
800-600	826-626	800-600
900-300	926-326	900-300
900-500	926-526	900-500
1100-500	1126-526	1100-500

Specifications can be customized according to customer requirements.
W-H: Represents the width * height of the product mounting surface.

Installation diagram

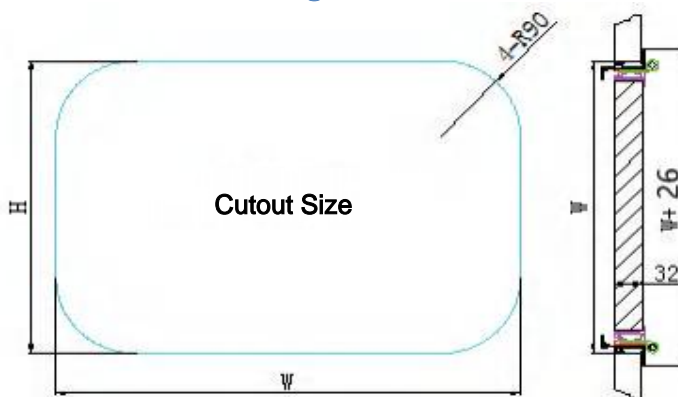



HD Rounded corners Storage door (Support rod)



American made self tensioning tongue lock



High-quality Aluminum alloy profiles



Installation frame (optional)



Anti-ULTRAVIOLET ASA Aluminum alloy composite sandwich panel



Aluminum alloy hinge



Support bar (optional)

Product Features and Main Functions

Door frame: High-quality aluminum alloy profiles.

Panel: Anti-ULTRAVIOLET Aluminum alloy composite sandwich panel.

Door lock: American self - tensioning tongue lock.

Hinge: Aluminum alloy hinge.

Appearance: Powder coating,

Normal colors: white , **Customized colors:** custom color.

Main functions: The storage door is easy to install, firm and durable, has low requirements on the accuracy of opening size, beautiful appearance, can be opened at 180°, and can be customized according to customer requirements.

Options: Single support rod/Double support rod

Installation frame
Storage door lock

Single support rod :



Double support rod :



Installation frame :



Storage door lock :




Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
600-450	626-476	600-450
650-480	676-506	650-480
700-500	726-526	700-500
700-600	726-626	700-600
800-500	826-526	800-500
800-600	826-626	800-600
900-500	926-526	900-500
1100-500	1126-526	1100-500

Specifications can be customized according to customer requirements.
W-H: Represents the width * height of the product mounting surface.

Installation diagram

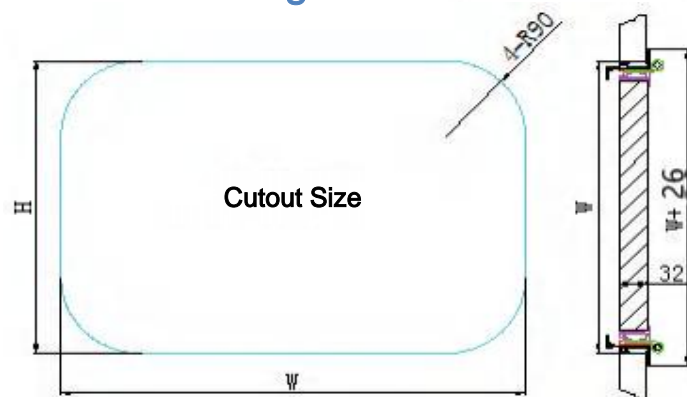

Specification

T WH
B
HD-W-H- BL(custom)--4R-S
L GR(custom)
R

HD: Represents product code;

W-H: Represents the width * height of the product mounting surface;

T/B/L/R: The position of hinge is above/below/left/right of the storage door;

WH/BL/GR: The colors are white/black/silver gray.

4R: Storage door (Rounded corners)

S: support rod

Main applications

Camp type trailer special,

suitable for wall thickness of 30~60mm ;


The installation size of the support rod position shall not be less than 450mm.

You can also choose to replace the support rod style with the rope style





HD Storage door (Right angle)

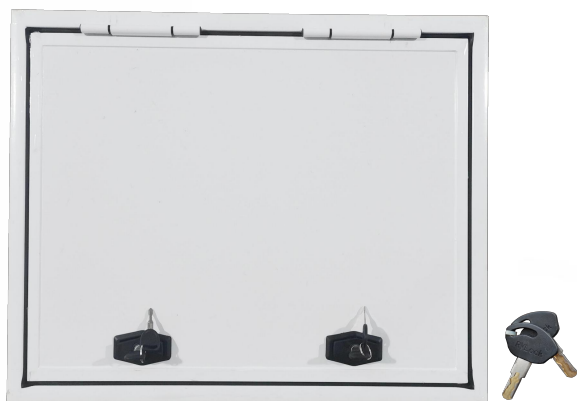

American made self tensioning tongue lock



High-quality Aluminum alloy profiles



Anti-ULTRAVIOLET ASA Aluminum alloy composite sandwich panel



Aluminum alloy hinge

Product Features and Main Functions

Door frame: High-quality aluminum alloy profiles.

Panel: Anti-ULTRAVIOLET Aluminum alloy composite sandwich panel.

Door lock: American self - tensioning tongue lock.

Hinge: Aluminum alloy hinge.

Appearance: Powder coating,

Normal colors: white , **Customized colors:** custom color.

Main functions: The storage door is easy to install, firm and durable, has low requirements on the accuracy of opening size, beautiful appearance, can be opened at 180°, and can be customized according to customer requirements.

Specification

T
B WH

HD-W-H- BL(custom)--4L

L
R GR(custom)

HD: Represents product code;

W-H: Represents the width * height of the product mounting surface;

T/B/L/R: The position of hinge is above/below/left/right of the storage door;

WH/BL/GR: The colors are white/black/silver gray.

4L: Storage door (Right angle)

Options: Storage door lock

Storage door lock :




Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
400-300	426-326	400-300
450-350	476-376	450-350
500-300	526-326	500-300
500-350	526-376	500-350
500-400	526-426	500-400
600-300	626-326	600-300
600-450	626-476	600-450
650-350	676-376	650-350
650-480	676-506	650-480
700-200	726-226	700-200
700-300	726-326	700-300
700-500	726-526	700-500
700-600	726-626	700-600
800-500	826-526	800-500
800-600	826-626	800-600
900-300	926-326	900-300
900-500	926-526	900-500
1100-500	1126-526	1100-500

Specifications can be customized according to customer requirements.
W-H: Represents the width * height of the product mounting surface.

Installation diagram

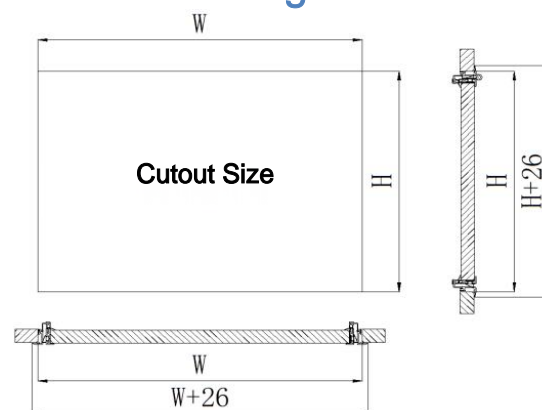

Main applications

Camp type trailer special,
suitable for wall thickness of 30~60mm.



HD Right angle Storage door (Support rod)



American made self tensioning tongue lock



Aluminum alloy hinge



Support bar (optional)



Anti-ULTRAVIOLET ASA Aluminum alloy composite sandwich panel



High-quality Aluminum alloy profiles

Product Features and Main Functions

Door frame: High-quality aluminum alloy profiles.

Panel: Anti-ULTRAVIOLET Aluminum alloy composite sandwich panel.

Door lock: American self - tensioning tongue lock.

Hinge: Aluminum alloy hinge.

Appearance: Powder coating,

Normal colors:white , **Customized colors:** custom color.

Main functions: The storage door is easy to install, firm and durable, has low requirements on the accuracy of opening size, beautiful appearance, can be opened at 180°,and can be customized according to customer requirements.

Options:Single support rod/Double support rod

Installation frame

Rope style

Storage door lock

Support rod:



Rope style :



Storage door lock :



Specification

T B WH

HD-W-H- BL(custom)--4L

L R GR(custom)

HD: Represents product code;

W-H:Represents the width * height of the product mounting surface;

T/B/L/R: The position of hinge is above/below/left/right of the storage door;

WH/BL/GR:The colors are white/black/silver gray.

4L:Storage door (Right angle)


S:support rod

Specification parameters

Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
400-300	426-326	400-300
450-350	476-376	450-350
500-300	526-326	500-300
500-350	526-376	500-350
500-400	526-426	500-400
600-300	626-326	600-300
600-450	626-476	600-450
650-350	676-376	650-350
650-480	676-506	650-480
700-200	726-226	700-200
700-300	726-326	700-300
700-500	726-526	700-500
700-600	726-626	700-600
800-500	826-526	800-500
800-600	826-626	800-600
900-300	926-326	900-300
900-500	926-526	900-500
1100-500	1126-526	1100-500

Specifications can be customized according to customer requirements.
W-H:Represents the width * height of the product mounting surface.

Installation diagram

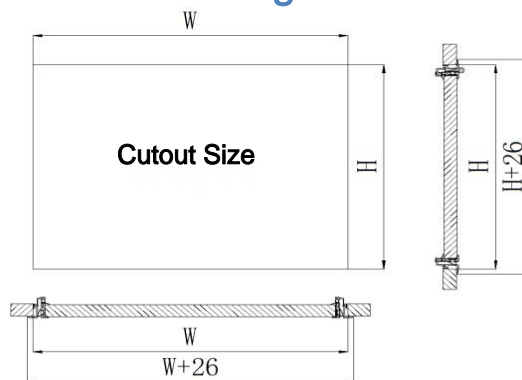

Main applications

Camp type trailer special,
suitable for wall thickness of 30~60mm.



BD RV warehousing door



mechanical linkage
Three point lock



Aluminum alloy
hinge



Air spring support rod
For automobiles



High-quality aluminum
alloy profile
powder spraying



High-quality
Aluminum alloy profiles
Powder coated

Product Features and Main Functions

Door frame: High-quality aluminum alloy profiles.

Normal colors: black and white; Customized colors: silver grey.

Panel: Powder coated high-strength aluminum alloy panel/non-slip aluminum plate, painted in black, white, silver gray or aluminum alloy color, can also be customized according to customer requirements.

Support rod: Air spring support rod for automobiles.

Open: lift open with an opening Angle greater than 90° .

Door lock: mechanical linkage three point lock.

Main functions: The door of The storeroom realizes The function of opening, closing and locking. Light structure, easy to install and use, firm and durable, various models.

Options:

1. The panel is Sprayed aluminum sheet;
2. Non-slip aluminum panel.

Main applications

Used in the storage room of RV.



Specification parameters


Regular Size W-H	Product Size/mm (W+26)-(H+26)	Cutout Size/mm (W)-(H)
1524-450	1574-506	1524-450
1524-380	1574-436	1524-380
1524-385	1574-441	1524-385

Specifications can be customized according to customer requirements.

W: Width of door mounting surface, unit mm;


H: Height of the door mounting surface, unit mm.

Installation diagram

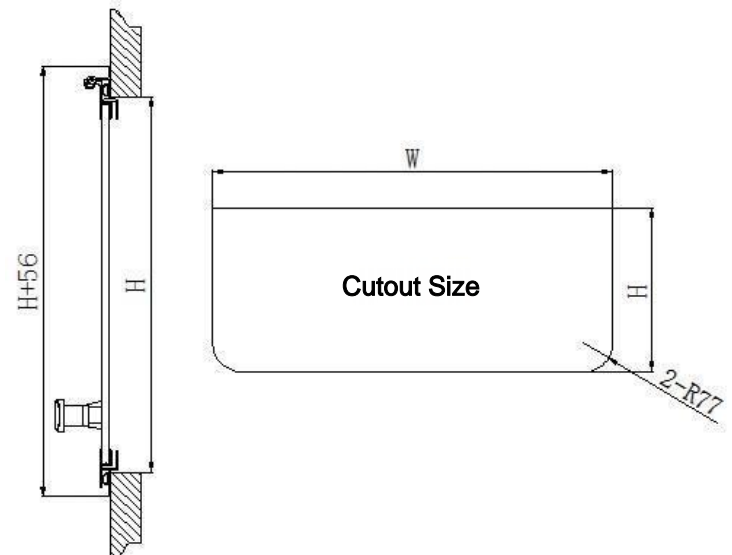



MS-F manual folding Single step



High-quality
Aluminum alloy
profiles
Powder coated



High-quality carbon steel



SUS304

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.


Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Specification parameters

Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
MS-F-450-S	450-210	430
MS-F-500-S	500-210	480
MS-F-550-S	550-210	530
MS-F-600-S	600-210	580

Specifications can be customized according to customer requirements.
W: The net size and length of the step pedal.

Installation diagram

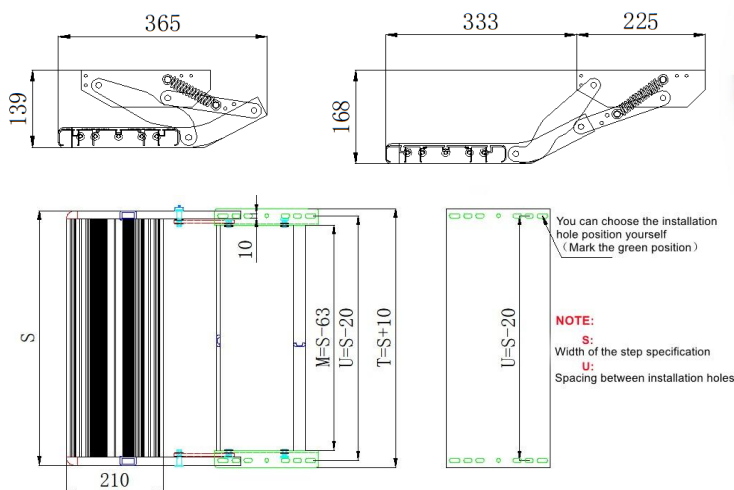


Specification

MS-F-W- S

MS-F: Represents product code;

W: Represents the length of the net size of the step;


S: Represents the number of steps, single.

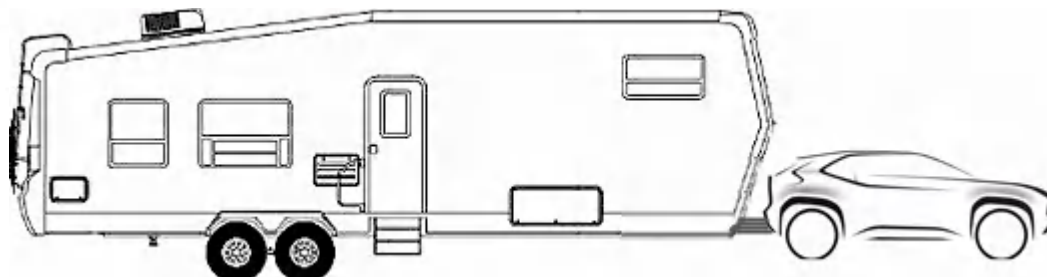

This product is suitable for various types of RVs, with installation located at the bottom of the RV door or other required positions



MS-F manual folding Double step



High-quality
Aluminum alloy
profiles
Powder coated



High-quality carbon steel



SUS304

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Specification parameters

Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
MS-F-450-D	450-210	430
MS-F-500-D	500-210	480
MS-F-550-D	550-210	530
MS-F-600-D	600-210	580

Specifications can be customized according to customer requirements.
W: The net size and length of the step pedal.

Specification



MS-F-W- D

MS-F: Represents product code;

W: Represents the length of the net size of the step

D: Represents the number of steps, Double.

Installation diagram

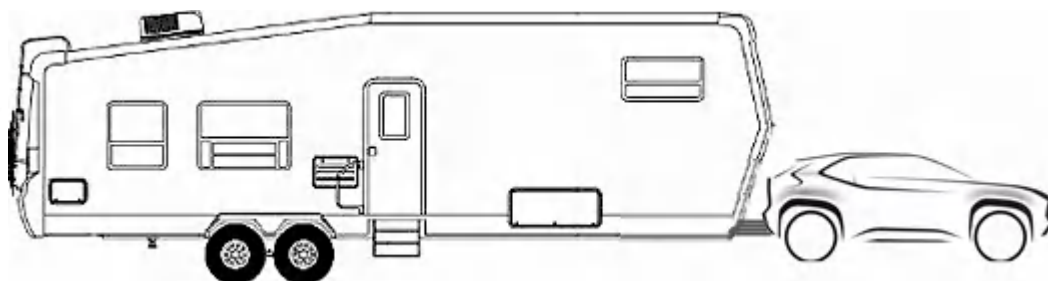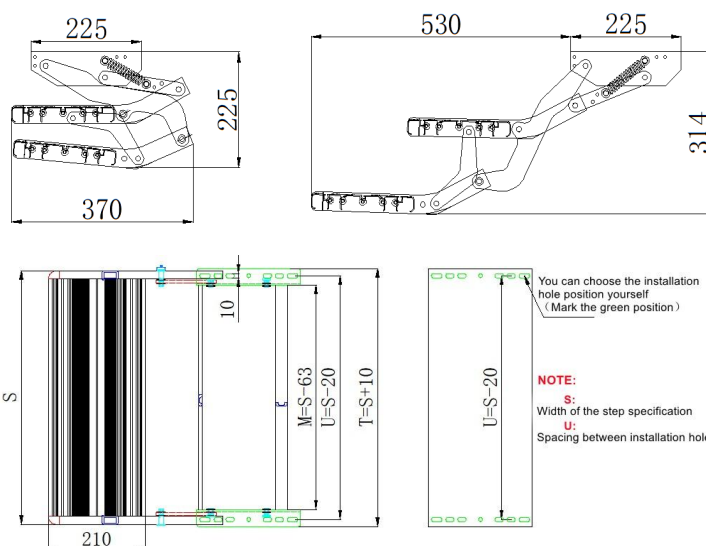


This product is suitable for various types of RVs, with installation located at the bottom of the RV door or other required positions



E-F Electric folding Single step



High-quality carbon steel



SUS304



High-quality Aluminum alloy profiles
Powder coated



Motor

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Open: When the door is opened, the step will open automatically, and when the door is closed, the step will shrink automatically.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Induction device: When the door is opened, the steps will automatically open ;

When the door is closed, the steps will automatically retract.

Obstacle avoidance function: When encountering obstacles during the process of stepping open, Stepping will stop opening.



Specification parameters

Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
E-F-450-S	450-210	430
E-F-500-S	500-210	480
E-F-550-S	550-210	530
E-F-600-S	600-210	580

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.

Installation diagram

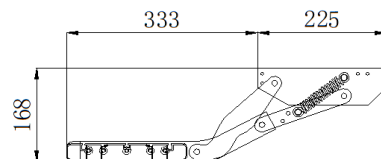




Specification

E-F-W- S

E-F: Represents product code;

W: Represents the length of the net size of the step

S: Represents the number of steps, single.

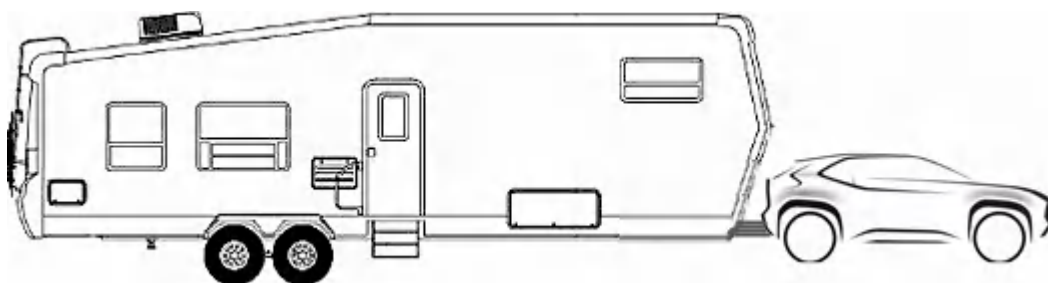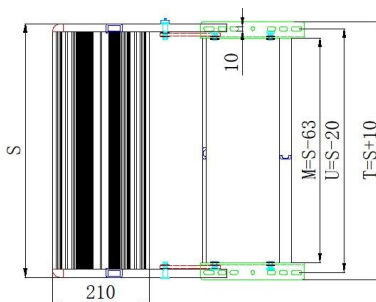

This product is suitable for various types of RVs, with installation located at the bottom of the RV door or other required positions



E-F Electric folding Double step




High-quality Aluminum alloy profiles
Powder coated



SUS304



High-quality carbon steel



Motor

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Open: When the door is opened, the step will open automatically, and when the door is closed, the step will shrink automatically.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Induction device: When the door is opened, the steps will automatically open ;

When the door is closed, the steps will automatically retract.

Obstacle avoidance function: When encountering obstacles during the process of stepping open, Stepping will stop opening.


Specification parameters

Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
E-F-450-D	450-210	430
E-F-500-D	500-210	480
E-F-550-D	550-210	530
E-F-600-D	600-210	580

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.

Installation diagram

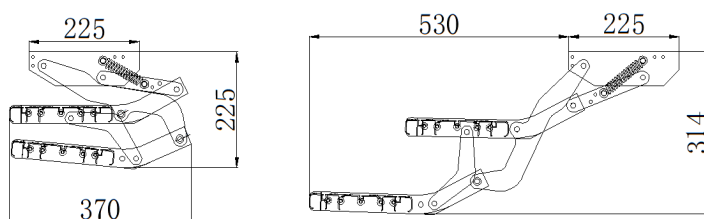



Specification

E-F-W- D

E-F: Represents product code;

W: Represents the length of the net size of the step;

D: Represents the number of steps, Double.

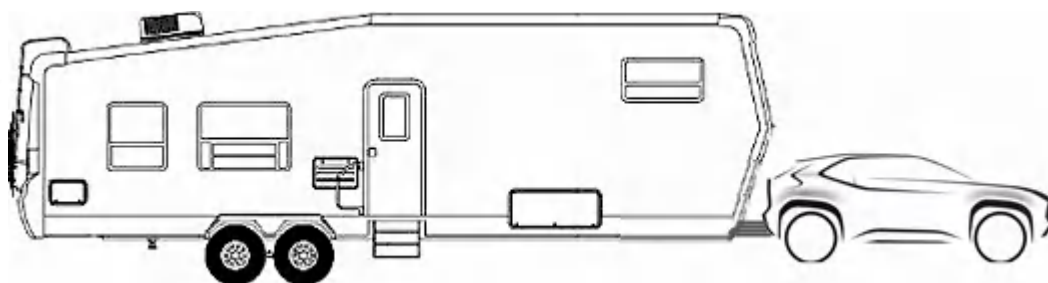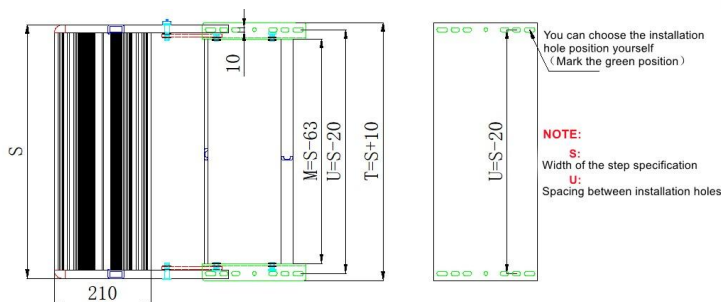

This product is suitable for various types of RVs, with installation located at the bottom of the RV door or other required positions




MC manual CASSETTE STEP



High-quality Aluminum alloy profiles
Powder coated



Buckle design
Open more lightweight



Pedal Hidden design



Suitable for
different installation heights

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 150KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.


Specification parameters

Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W+62)
MC-450-S	450-210	512
MC-500-S	500-210	562
MC-550-S	550-210	612
MC-600-S	600-210	662

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.

Installation diagram

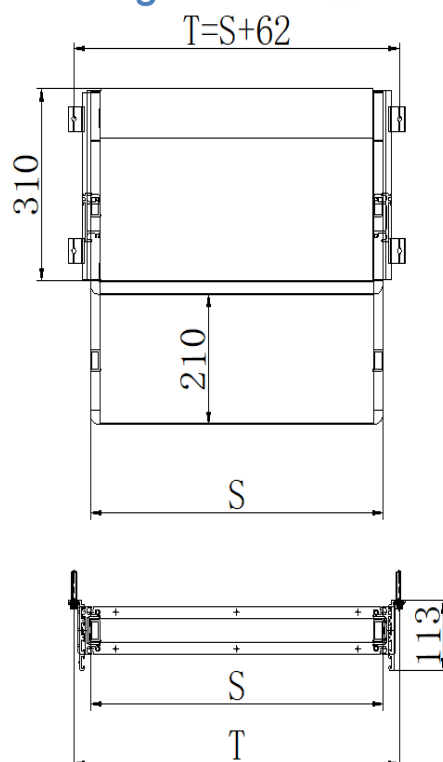


Specification

MC-W- S

MC: Represents product code;

W: Represents the length of the net size of the step;

S: Represents the number of steps, single.

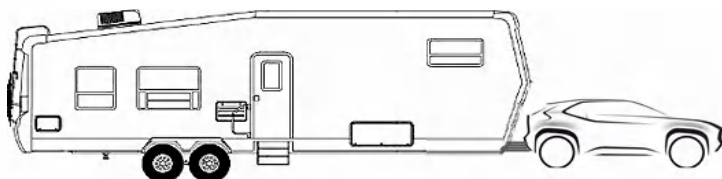

This product is suitable for various types of RVs, with installation located at the bottom of the RV door or other required positions

Specification (W): S; Installation hole size T: S+62;
Pedal extension length: 210mm.



Electric CASSETTE STEP



Parts list



Sensing
Element




Control system




Auxiliary installation



High-quality Aluminum alloy profiles
Powder coated



Electric



Pedal Hidden design



Suitable for
different installation heights

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 150KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Induction device: When the door is opened, the steps will automatically open ; When the door is closed, the steps will automatically retract.





Obstacle avoidance function: When encountering obstacles during the process of stepping open, Stepping will stop opening.

Specification parameters

Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W+62)
EC-450-S	450-200	512
EC-500-S	500-200	562
EC-550-S	550-249	612
EC-600-S	600-249	662

Specifications can be customized according to customer requirements.
W: The net size and length of the step pedal.

Installation diagram

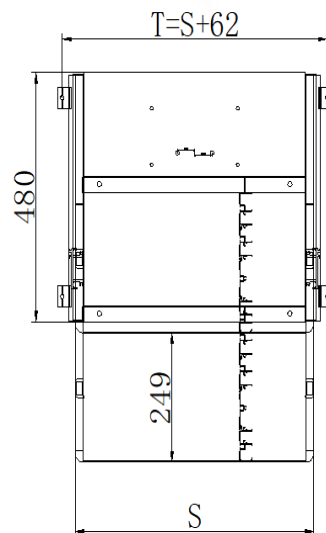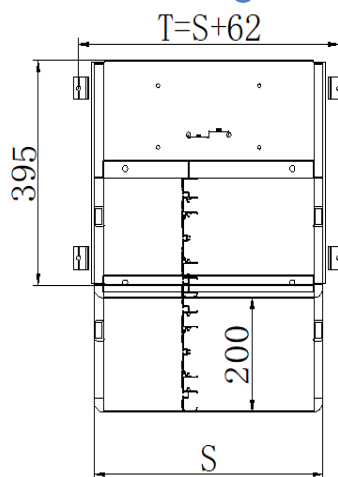

Specification


EC-W- S

EC: Represents product code;

W: Represents the length of the net size of the step;

S: Represents the number of steps, single.

Usage scenario




Suitable for various types of RVs, business vehicles, etc.

The installation position is located at the bottom of the car door or other required locations

Specification (W): S; Installation hole size T: S+62;
S=450/500; Pedal extension length: 200mm.
S=550/600/700 ; Pedal extension length: 249mm.



MS-F manual folding Three step



High-quality
Aluminum alloy
profiles
Powder coated



High-quality carbon steel



SUS304

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Specification parameters

Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W-20)
MS-F-450-T	450-210	430
MS-F-500-T	500-210	480
MS-F-550-T	550-210	530
MS-F-600-T	600-210	580

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.


Specification

MS-F-W- T

MS-F: Represents product code;


W: Represents the length of the net size of the step;

T: Represents the number of steps, Three.

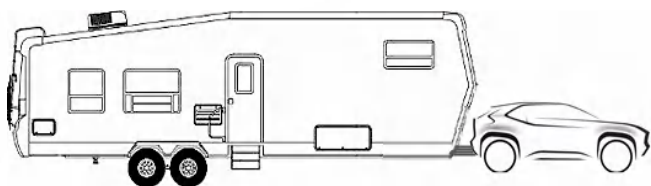


This product is suitable for various types of RVs, with installation located at the bottom of the RV door or other required positions

Installation diagram

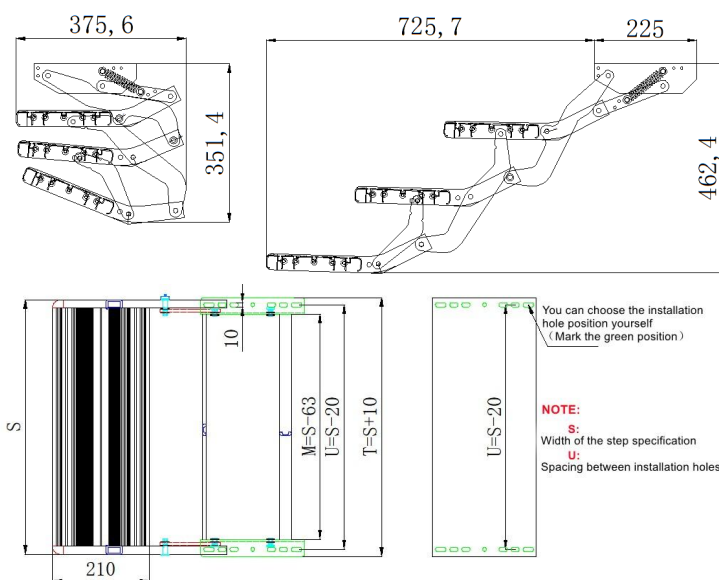

Customized version

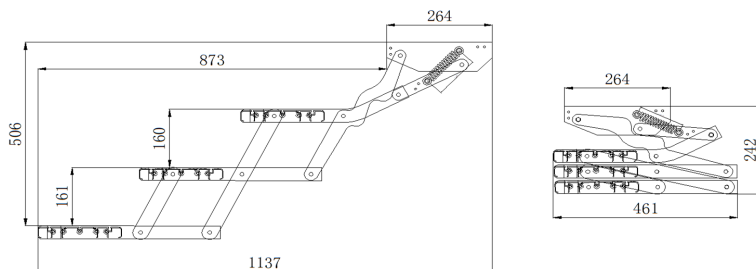



MS-F manual folding Four step



Anti slip pedal



Auxiliary support rod




Thickened steel



STEP Lock



Stainless steel hinges



Hidden design

Product Features and Main Functions

Structural component: Stainless steel 316.

Pedal: High strength aluminum alloy profile with anti slip design on the surface.

Skeleton: Thickened steel, surface treated with anti rust spraying technology.

Protective board: Thickened steel, surface treated with anti rust spraying technology.

Step lock: Pull lock.

Appearance: The structural components are coated in black, and the pedal surface is treated with anti rust coating. We can also customize colors according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.


Specification

MS-F-W-FO

MS-F: Represents product code;

W: The width of the step installation frame;

F: Represents the number of steps, Four.

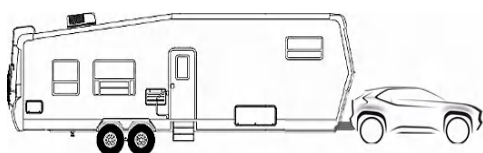

This product is suitable for various types of RVs, with installation located at the bottom of the RV door or other required positions


Specification parameters

Regular Size W	Net size of pedal Length-Width	Installation frame size W-H
MS-F-600-FO	448-200	600-560

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.


Installation diagram

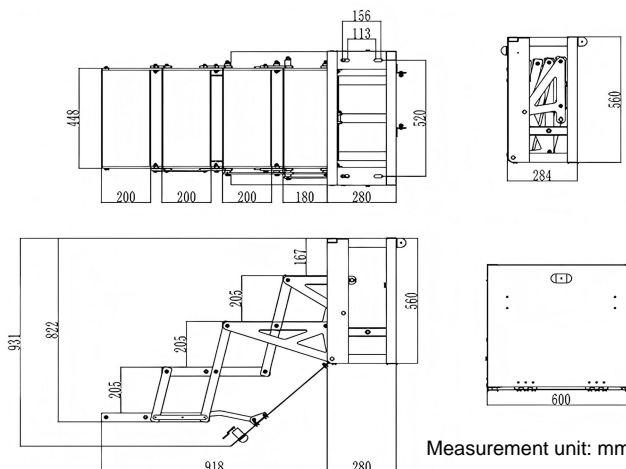


Suggested installation height: 980-1080mm above the ground




MS-F manual folding Five step



High-quality carbon steel



Aluminum alloy profiles
Powder coated



Aluminum alloy profiles
Powder coated



American self - tensioning tongue lock



Support bar



Iron frame

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Installation frame: High strength iron

Protective board: High strength aluminum alloy profile with anti slip design on the surface.

Step lock: American made self tightening tongue lock.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 200KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Specification parameters

Regular Size W	Net size of pedal Length-Width	Installation frame size (W+190)
MS-F-450-F	450-210	640
MS-F-500-F	500-210	690
MS-F-550-F	550-210	740
MS-F-600-F	600-210	790

Specifications can be customized according to customer requirements.

W: The net size and length of the step pedal.


Specification

MS-F-W- F

MS-F: Represents product code;



W: Represents the length of the net size of the step;

F: Represents the number of steps, Five.

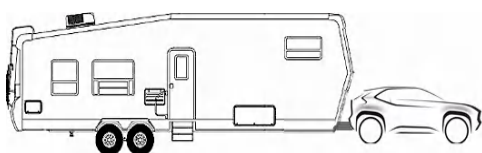

This product is suitable for various types of RVs, with installation located at the bottom of the RV door or other required positions


Installation diagram

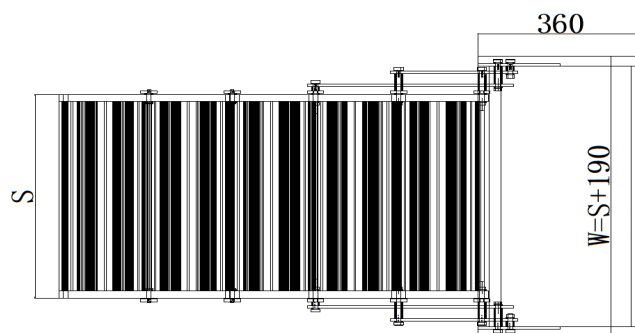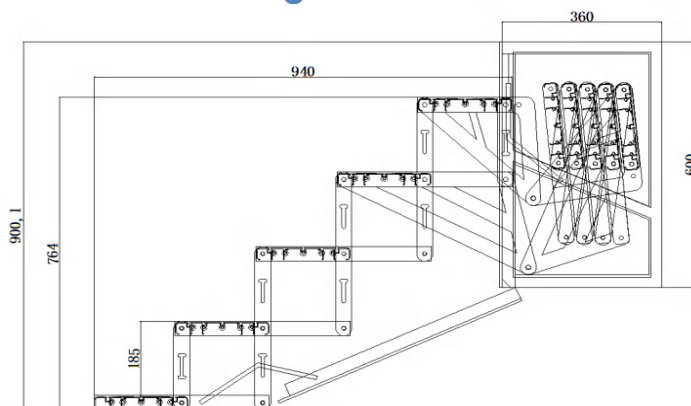

S:Regular Size W
W:Installation frame size



MS-F manual folding SIX step



High-quality
Aluminum alloy
profiles
Powder coated



High-quality carbon steel



SUS304

Product Features and Main Functions

Structural member: High-quality carbon steel.

Pedals: High-quality aluminum alloy profiles with anti-skid surface design.

Hardware: SUS304.

Appearance: Black coating on structural parts, anodized treatment on pedal surface, black can also be customized according to customer requirements.

Main function: Ingenious design, concealed installation, safe and reliable, easy to load 150KG. It can be installed on the chassis or load-bearing parts at the door of any vehicle for the convenience of getting on and off the vehicle.

Specification parameters

Regular Size W	Net size of pedal Length-Width	Spacing of mounting holes (W+182)
MS-F-450-SI	450-210	632
MS-F-500-SI	500-210	682
MS-F-550-SI	550-210	734
MS-F-600-SI	600-210	782

Specifications can be customized according to customer requirements.
W: The net size and length of the step pedal.

Specification




MS-F-W- SI

MS-F: Represents product code;

W: Represents the length of the net size of the step;

SI: Represents the number of steps, Six.

Installation diagram

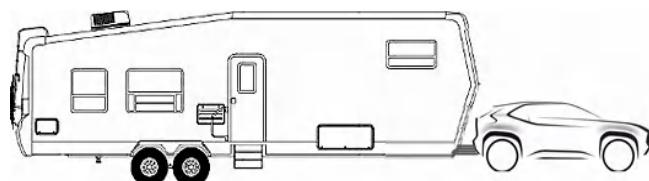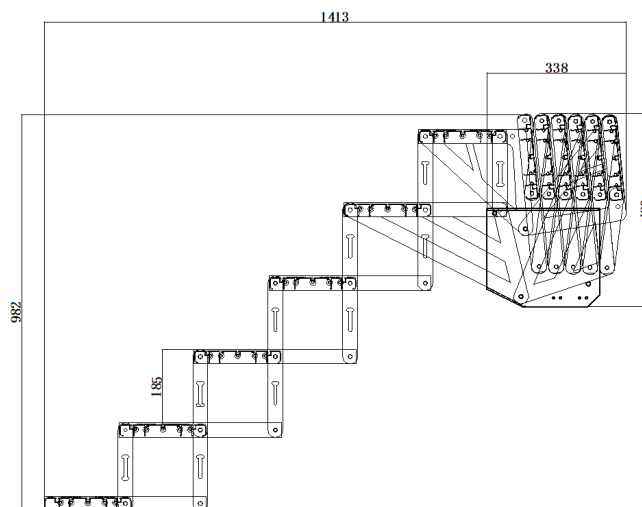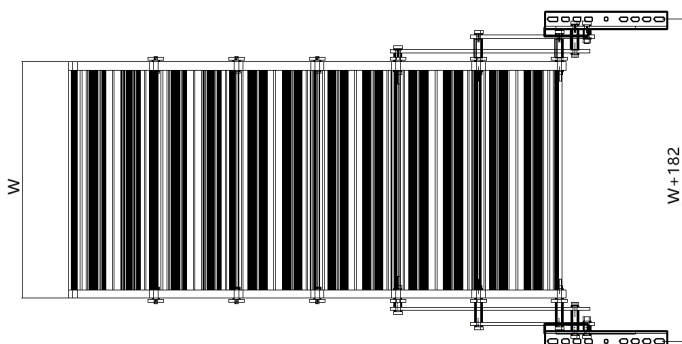

This product is suitable for various types of RVs,
with installation located at the bottom of the RV door or other required positions



PW Pickup Front sliding window



Tempered glass



High-quality
Aluminum alloy profile,
Powder coating



Push-pull opening

Specification parameters

Specifications can be customized according to customer requirements.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.

Glass: 3mm tempered glass (3C、E-mark、DOT certification).


Opening: Push-pull opening,

The middle glass can be pushed and pulled.

Main functions: The window has good functions of light transmission, sound insulation and insect prevention. The sliding window adopts self tapping screws to fix the wall, which has the advantages of simple installation and use, light structure, firmness and durability, and various models.

Installation diagram

Cutout Size

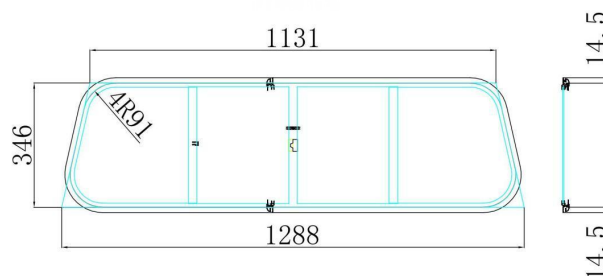

Main applications

Used in RV or buildings,

Different installation frames are suitable for different wall thicknesses;

Total applicable range of wall thickness: 30-80mm.

Usage scenario





PW Pickup Side sliding window



Tempered glass



High-quality
Aluminum alloy profile,
Powder coating



Push-pull opening



Insect screen

Specification parameters

Specifications can be customized according to customer requirements.

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.


Glass: 3mm tempered glass (3C、E-mark、DOT certification).

Opening: push-pull type open, one side glass can push pull.

Window screen: One side built-in removable screen window

Main functions: The window has good functions of light transmission, sound insulation and insect prevention. The sliding window adopts self tapping screws to fix the wall, which has the advantages of simple installation and use, light structure, firmness and durability, and various models.

Installation diagram

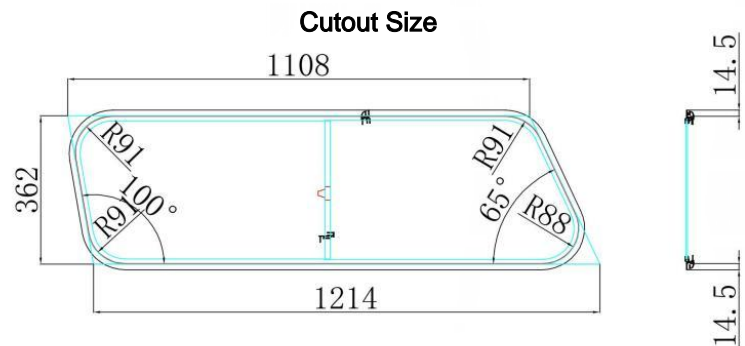

Main applications

This product is applicable to all types of pickup trucks

Usage scenario






PW Pickup Rear Tophung Hinged window



Tempered glass



High-quality
Aluminum alloy profile,
Powder coating



Air support rod



Window lock

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.


Glass: 3mm tempered glass (3C、E-mark、DOT certification).

Opening: The window is equipped with a gas support rod, which can be pushed out.

Window lock: American made self tightening tongue lock.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, sun shading Anti mosquito, sound insulation, heat insulation, privacy and other functions and Good waterproof performance. Available when screens and windows are open As an emergency exit (except for small windows). Lightweight structure, It is easy to install and use, firm and durable, and has various models.

Installation diagram

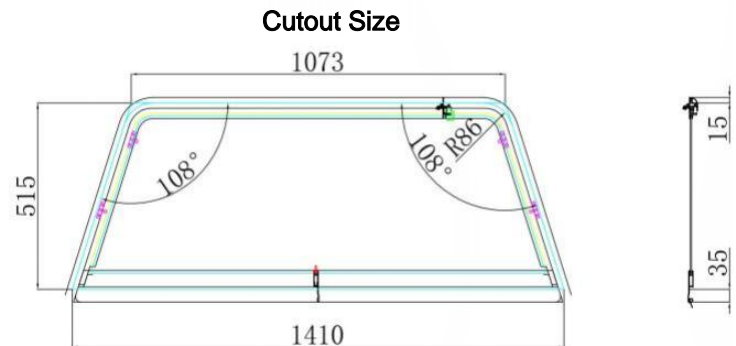

Main applications

This product is applicable to all types of pickup trucks

Specification parameters

Specifications can be customized according to customer requirements.

Usage scenario





PW Pickup Side Tophung Hinged window



Tempered glass



High-quality
Aluminum alloy profile,
Powder coating



Air support rod



Window lock

Product Features and Main Functions

Window frame: High-quality aluminum alloy profiles, powder coating.

Normal colors : black , **Customized colors:** custom color.


Glass: 3mm tempered glass (3C、E-mark、DOT certification).

Opening: The window is equipped with a gas support rod, which can be pushed out.

Window lock: American made self tightening tongue lock.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, sun shading Anti mosquito, sound insulation, heat insulation, privacy and other functions and Good waterproof performance. Available when screens and windows are open As an emergency exit (except for small windows). Lightweight structure, It is easy to install and use, firm and durable, and has various models.

Installation diagram

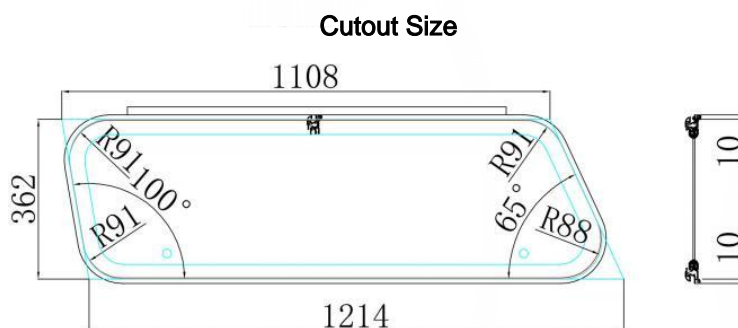

Main applications

This product is applicable to all types of pickup trucks

Specification parameters

Specifications can be customized according to customer requirements.

Usage scenario





RV Table



High-quality
Aluminum alloy frame



Aluminium alloy hinge



High-quality
aluminum alloy panel



Rotary tongue lock

Product Features and Main Functions

Table frame: High-quality aluminum alloy profile.

Table panel : High-quality aluminum alloy plate.

Lock: Rotary tongue lock.

Hinge: Aluminum alloy hinge.

Main function: The small table is easy to install, firm and durable, installed on the outside of the car body, easy to install, beautiful and generous

Optional: Lamp

Specification parameters

Regular Size W-H	Product Size/mm (W)-(H)	Cutout Size/mm (W)-(H)
800-450	800-450	800-450
800-500	800-500	800-500

Specifications can be customized according to customer requirements.


Description

Size: 800mm X 450mm X 20mm



Product Weight: 5KG

Load carrying capacity: 30KG

Usage scenario

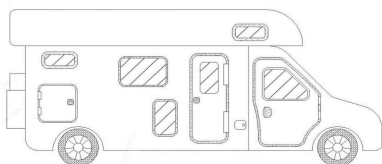

Installation diagram

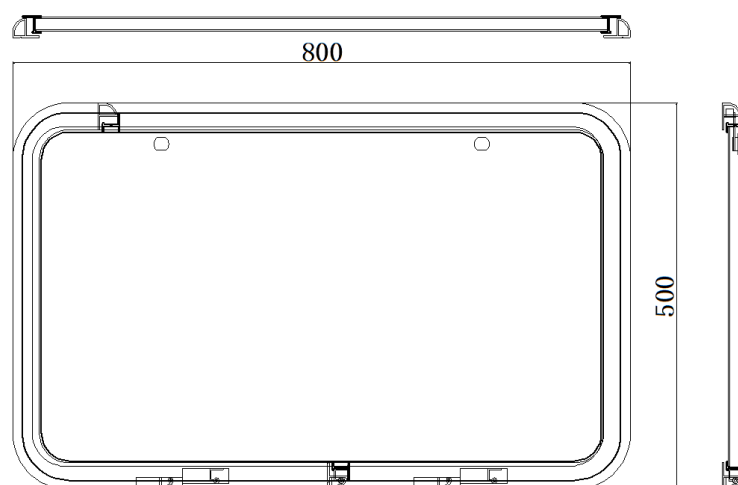
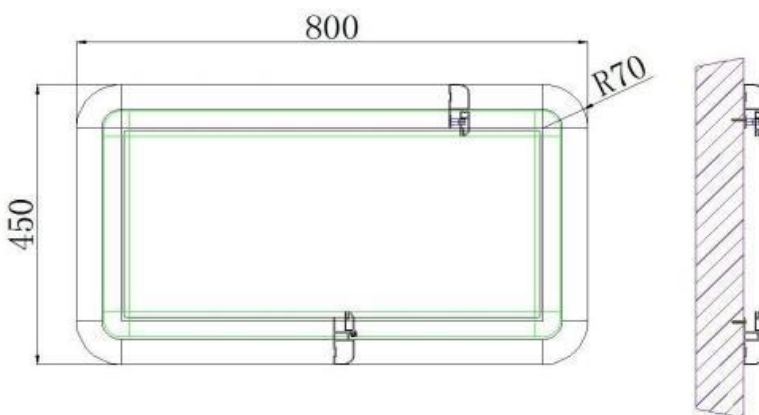


Main applications


This product is applicable to all types of pickup trucks



RV Shower Door

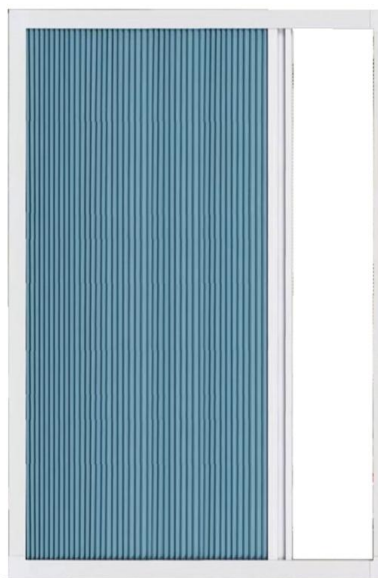

Honeycomb structure Non-woven fabric



High-quality Aluminum alloy frame

Product Features and Main Functions


Frame: High-quality aluminum alloy profile.

Shower Curtain: Honeycomb non-woven fabric.

Appearance: The conventional colors are sky blue and beige; it can also be customized according to customer requirements.

Main function: This product adopts honeycomb like structure, waterproof and mildew proof non-woven cloth surface Material, heat insulation, noise reduction, heat preservation and cooling. Push-pull opening maximum Save shower space, after unfolding, dry and wet separation, no dead corner, rest assured to shower. After folding, it does not occupy space and is beautiful

Product structure

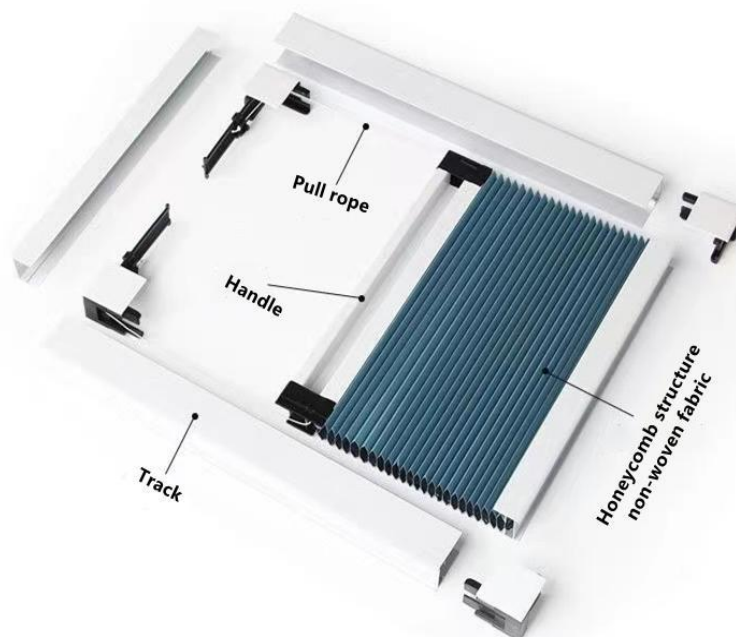

Specification parameters

Regular Size W-H	Cutout Size/mm (W)-(H)
600-1800	600-1800
600-2000	600-2000

Specifications can be customized according to customer requirements.

Main applications

RV and buildings.




RV Bathroom sliding door



Aluminum film attached to the exterior surface



Magnetic adsorption handle

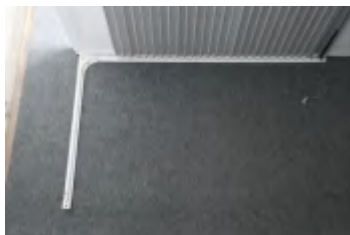

Installation diagram of lower guide rail



(ABS) 90° adapter angle

Product Features and Main Functions

Main material: PVC surface with aluminum film+high-strength aluminum alloy handle;

Color: Silver, white.

Adapter angle: ABS material ;

Default Adapter angle : 90° , customizable angle.

Main function: This product is made of aluminum alloy material , which is durable and durable. The unique structure can block moisture and keep warm. The push-pull opening is easy to install, and after unfolding, there is no dead angle for dry and wet separation.

Specification parameters


Regular Size W-H	Cutout Size/mm (W)-(H)
600-1800	600-1800
600-2000	600-2000

Specifications can be customized according to customer requirements.

Main applications

RV and buildings.

Installation diagram

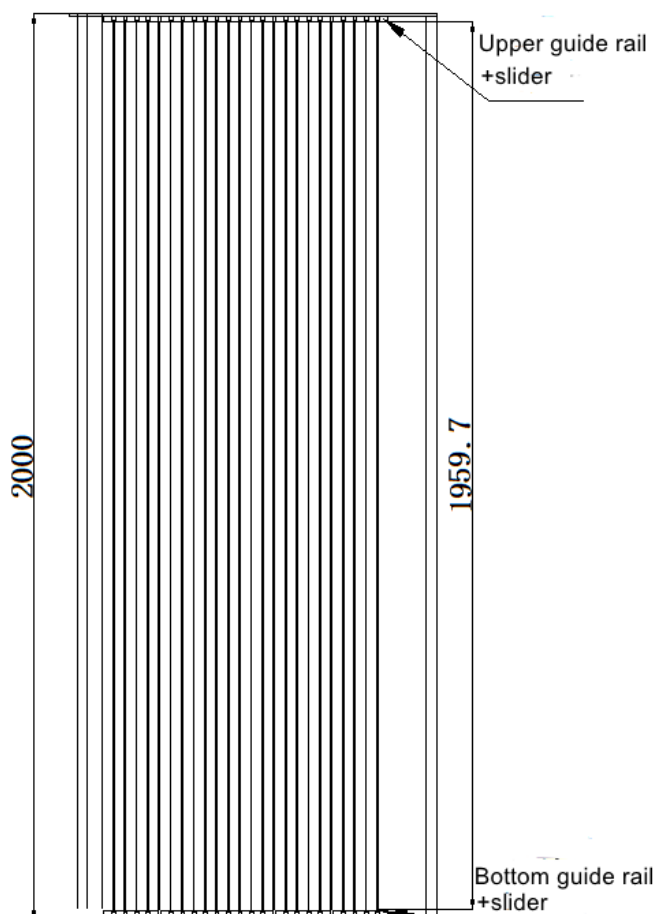



RV Aluminum plate (Aluminum body decoration) & Guide the rain trough

Aluminum plate (Aluminum body decoration)



Guide the rain trough



Product Features and Main Functions

Aluminum plate: High-quality aluminum alloy surface anti ultraviolet roller coating.

Color of aluminum plate: The conventional color is white.

Installation: The aluminum plate is fixed on the body frame by inserting.

Main functions: This piece is used as the exterior decoration of the RV. It is easy to install and can effectively reduce the body weight. It is high-end, beautiful and atmospheric.

Main applications

RV and buildings.

Specification parameters

Specifications can be customized according to customer requirements.

Application scenarios



Product Features and Main Functions

Rain chute: High-quality aluminum alloy profile, powder spraying.

Color: The general color is white.

Installation: Install the rain chute above the door of the RV.

Main functions: The upper edge of the RV door guides the rainwater to improve the sealing stability of the RV door. The rain guide groove is easy to install.


Main applications

RV

Specification parameters

Specifications can be customized according to customer requirements.

Specification parameters

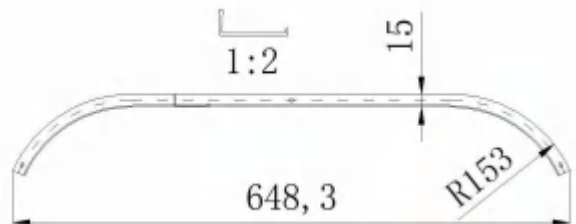



RV ladder&aluminum Article sealing side

RV ladder



aluminum Article sealing side



Product Features and Main Functions

RV Ladder: High-quality aluminum alloy profiles, powder spraying.

RV Ladder color: The normal color is white and black.

Mounting: Screw mounted in proper position.

Main functions: It is convenient for people to get on and off the rv roof. The load bearing can reach 200KG. It is durable and will not be deformed for a long time. The ladder structure is light and easy to install and use.

Product Features and Main Functions

Aluminum Article sealing side: High-quality aluminum alloy profiles, powder coating.

Color of aluminum strip: White and black are the normal colors.

Installation: Install Article sealing side at the joint of the top and side of the RV.

Main functions: This piece is used as the top and side splicing part of the rv to draw the edge, and has the sealing and aesthetic function, easy to install.

Specification parameters

Specifications can be customized according to customer requirements.

W: The width of the RV ladder, unit mm;

H: The height of the RV ladder, unit mm.

Specification parameters

Specifications can be customized according to customer requirements.

The length, Angle, etc of the Article sealing side

Main applications

RV

Main applications

RV



Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** custom color.

Door panel: White UV resistant composite sandwich panel (other colors can be customized).


Glass: UV resistant acrylic glass.

Door lock: safety certified single point lock.

Structure: Unique structure. The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Light structure, easy installation and use, firm and durable, and various models



UV - resistant acrylic



UV resistant composite sandwich panel



High-quality aluminum alloy




single point lock

Specification parameters

Specifications can be customized according to customer requirements.

Main applications

RV and buildings.

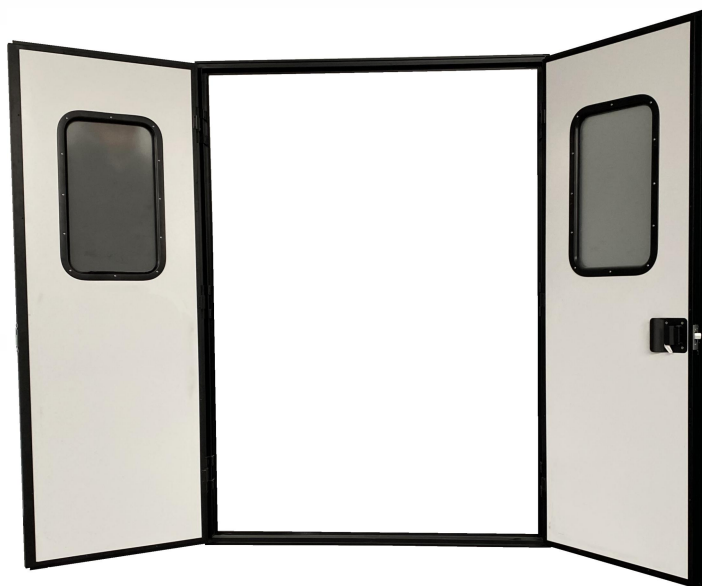

Product Features and Main Functions

Door frame: High-quality aluminum alloy profile, powder coating.

Normal colors: black and white; **Customized colors:** custom color.

Door panel: White UV resistant composite sandwich panel (other colors can be customized).

Glass: Frosted tempered glass or

UV - resistant acrylic sheet is available.

Door lock: safety certified single point lock.

Structure: Unique structure, one door can be opened separately, or both doors can open; The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, and various models.

Optional: see specification for details.


Optional parts: Door Stop.

(Optional items must be ordered separately)

Door Stop :



Frosted tempered glass
UV - resistant acrylic



UV resistant composite
sandwich panel




High-quality
aluminum alloy



single point lock

Installation diagram

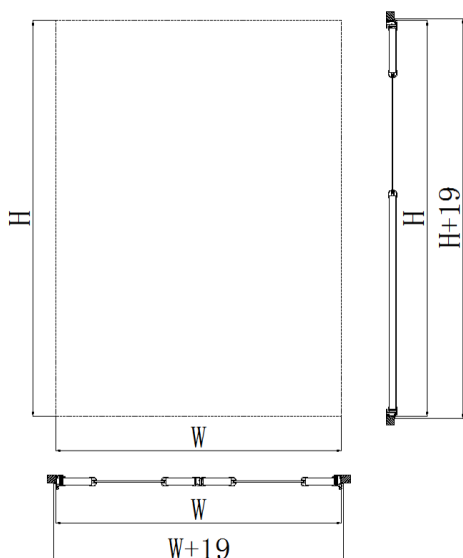

Main applications

RV and buildings.

Specification parameters

Specifications can be customized according to customer requirements.



HW Frameless RV window



High-quality Aluminum alloy
Powder coating



Support bar



Double layer
acrylic



Screen windows
sunshades

Product Features and Main Functions

Window hinges:High-quality aluminum alloy profile, powder coating

Window hinges color: Normal color is black.

Glass: Double layer UV resistant acrylic glass. (E-MARK certified)

Open: The window is equipped with support rods, which can be extended to open at two angles. The maximum opening angle varies depending on the size of the opening. There are three options: gear, knob, and gas support rod; The maximum opening angle can reach 80 degrees.

Main function: The window has light transmission, insect prevention, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Options:High-quality glass fiber gauze curtain and shading curtain integration.

Screen windows and sunshades:



Pull down: Open the sunshades

Push up: Open the Screen windows

Main applications

Used in RV or buildings,

Total applicable range of wall thickness: 28-35mm.

Specification parameters


Regular Size W-H	Product Size/mm (W+90)-(H+90)	Cutout Size/mm (W)-(H)
700-500	790-590	700-500

Specifications can be customized according to customer requirements.

W: Width of Window mounting surface, unit mm;

H: Height of the Window mounting surface, unit mm.

Installation diagram

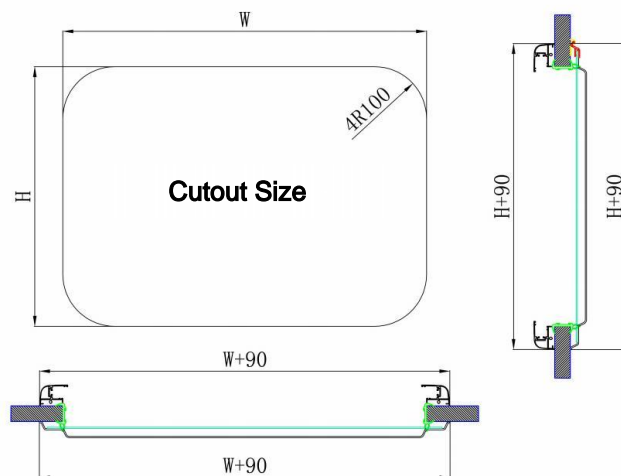




RV Water Inlet Hatch



FEATURES & BENEFITS

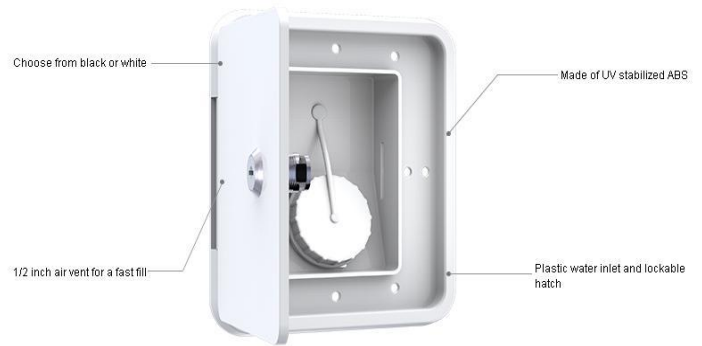


Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-151-166-01	5.94"(151mm)	6.54"(166mm)	4.27"(108.5mm)	3.01"(76.5mm)	white
SFWH1-151-166-01	5.94"(151mm)	6.54"(166mm)	4.27"(108.5mm)	3.01"(76.5mm)	black
SFWH1-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	white
SFWH2-193-164-02	7.60"(193mm)	6.48"(164.5mm)	5.83"(148mm)	4.69"(119mm)	black

Product Features and Main Functions Main applications


1. Quick and easy to install, keep it beautiful.
2. Using UV resistant materials.
3. Tighten the screw with a screwdriver.

RV


Installation diagram

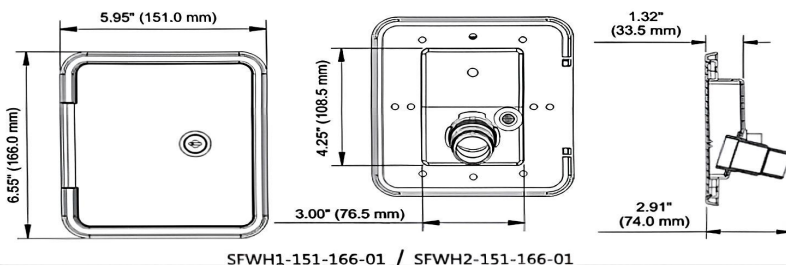

SFWH1-151-166-01 / SFWH2-151-166-01

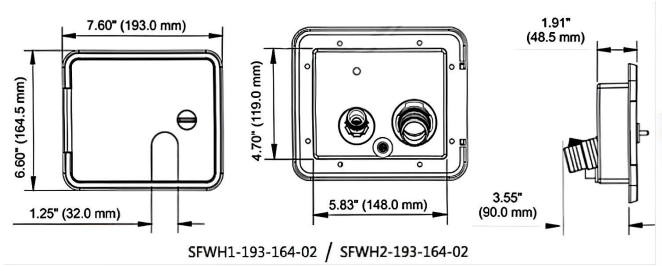


SFWH1-193-164-02 / SFWH2-193-164-02

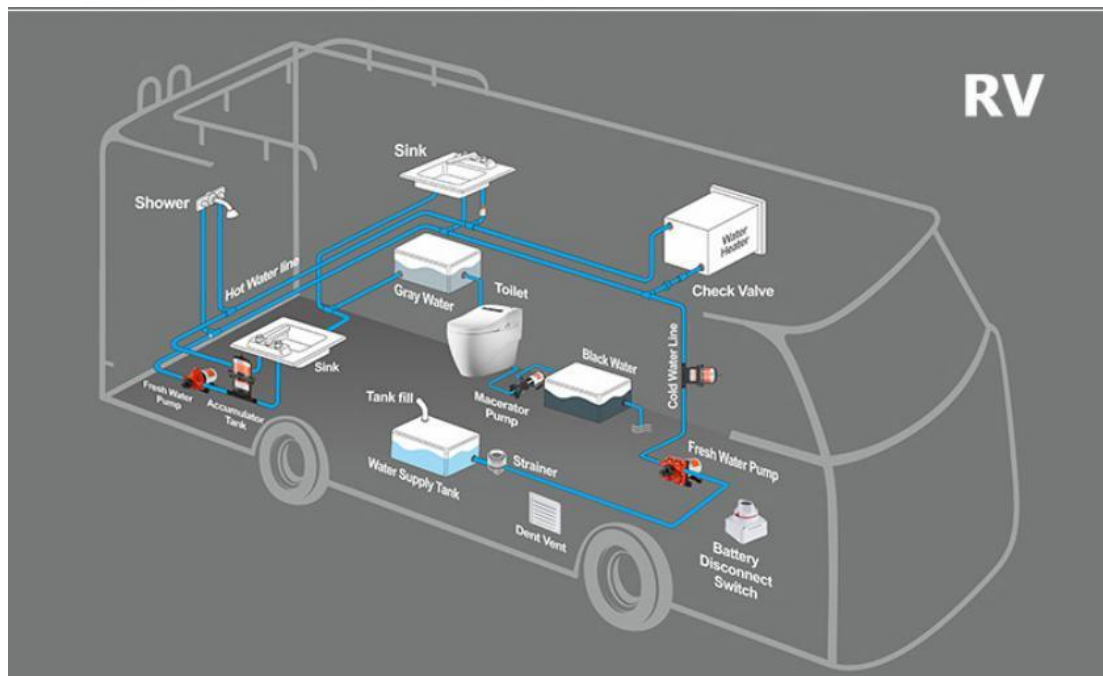



RV Refueling Port

FEATURES & BENEFITS

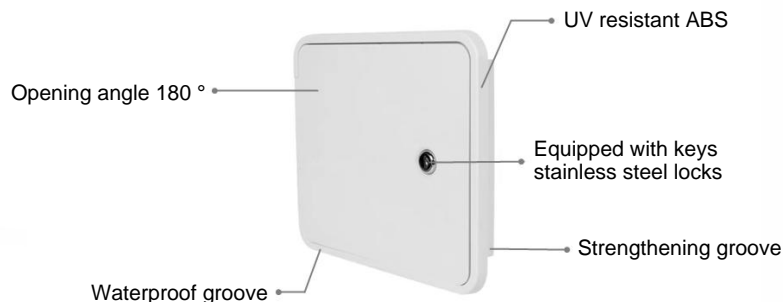

Appearance size: 260 * 230 * 50mm Opening size: 210 * 180mm

Hatch space size: 205 * 175mm Protruding thickness: 11mm

Product Features and Main Functions

1. UV resistant ABS

High quality anti-aging ABS plastic, specially added with anti ultraviolet component to extend service life

2. Waterproof trench

When it rains or washes the car, the anti sink can quickly drain water; High waterproof grooves can effectively prevent rainwater from entering the cabin door

3. Stainless steel safety lock

The safety lock head is made of stainless steel material, which is corrosion-resistant, not easy to rust, and has high durability

4. 180° opening and closing

Large opening and closing angle, convenient for subsequent refueling, and easy to use

5. Strengthening groove

Enhanced design, resistant to deformation, durable

6. Stainless steel screws

Equipped with stainless steel screws, it has good stability and is not easy to rust.

Main applications

RV

Application and Scope of Application



Hatch with Bottom

Applicable:
modification of charging
ports, switch sockets, etc

Installation diagram



No bottom hatch

Applicable:
water filling port,
oil filling port,
maintenance port, etc



OR-RV Windows



Product Features and Main Functions

Window frame: High-quality aluminum alloy profile;

Window frame color: Aluminum alloy natural color;

Regular colors: black, white; **Customized color:** Silver gray.

Glass: Double hollow tempered glass;

Gauze curtain: High-quality glass fiber gauze curtain and blackout cloth curtain.

Opening: The window is equipped with a support rod, which can be pushed outward, and can be opened up to 90 degrees.

Main functions: The window has the functions of opening, closing, ventilation, light transmission, sunshade, insect prevention, sound insulation, heat insulation, privacy and good waterproof performance. When the screen curtain and window are opened, they can be used as emergency exits (except for small windows). Lightweight structure, easy installation and use, firm and durable, and various models. More suitable for off-road and other needs

Specification parameters

Specifications can be customized according to user requirements.

Main applications

Applicable to RV with wall thickness of 50mm, other wall thickness sizes can also be customized



OR-RV Windows

OR-RV Doors



Product Features and Main Functions

Door frame: High-quality aluminum alloy profile;

Door frame color: Aluminum alloy natural color;

Regular colors: black, white; **Customized color:** Silver gray.

Door plate: High-quality aluminum plate;

Glass: Double hollow tempered glass fixed window;

Door lock: safety certification two-point lock.

Upgradeable customized central lock, password lock, face recognition function

Structure: The door has opening, closing, locking, ventilation, light transmission, sound insulation, heat insulation and good waterproof performance. Lightweight structure, easy installation and use, firm and durable, and various models.

Optional: Door stopper.

Gas strut. Default opening angle 127 °

(Optional parts must be ordered separately)

Door stopper :



Specification parameters

Specifications can be customized according to user requirements.



OR-RV Doors
Combination Lock



OR-RV Storage door



High-quality
Aluminum alloy
Door panel



High-quality
Aluminum alloy
Door frame



High-quality
Aluminum alloy
Hinge



High quality
Sealant strip



Flat press lock

Product Features and Main Functions

Door frame: High-quality aluminum alloy profiles.

Door Panel: High-quality Aluminum alloy panel.

Door lock: Flat press lock.

Door Hinge: High-quality Aluminum alloy hinge.

Door Color: Black, white, custom colors.

Sealing performance: High quality sealant strip.

Opening angle: 180 ° opening and closing, convenient to use

Main function: This product is suitable for a wide range of scenarios and has good waterproof performance. It can be used as a storage door or as a small dining table with a support rod added. Aluminum alloy material can prevent rust and is durable. The flat press lock design saves your space while making it easy to use. Press to open the storage door.

Specification parameters

Regular Size W-H	Product Size/mm (W+44)-(H+44)	Cutout Size/mm (W)-(H)
Customized size	Customized size	Customized size

Specifications can be customized according to user requirements.


W: Width of Storage door mounting surface, unit mm;

H: Height of the Storage door mounting surface, unit mm;

Main applications

Suitable for RVs with a wall thickness of 25-75mm; Other wall thickness sizes can also be customized.

Installation diagram

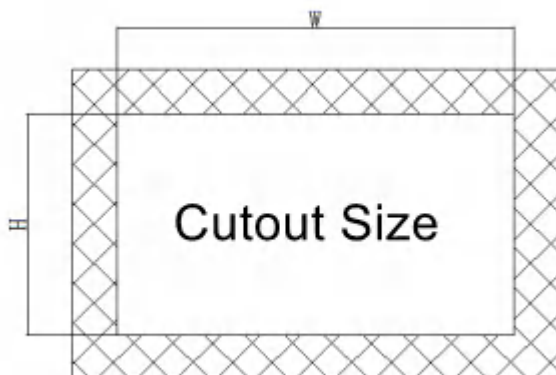



Horse trailer doors and windows

Horse trailer Windows



handle lock



crescent lock

Product Features and Main Functions

Window frame: High-quality aluminum alloy profile;
Normal colors: black and white;
Customized colors: silver grey, etc.
Glass: Tawny PC board/tempered glass;
Gauze curtain: One side built-in screen window (Optional) .
Window lock: crescent lock, installed on the outside.
Opening: Push-pull type open, one side glass can push pull.
Grille: High-quality aluminum alloy profile.
Main functions: The window has light transmission, mosquito proof, sound insulation, heat insulation and good waterproof performance. The window is fixed by tapping screw clamping wall, easy to install and use, lightweight structure, firm and durable, various models.

Specification parameters

Specifications can be customized according to user requirements.

Main applications

Applicable to RV and Horse trailer



Horse trailer Doors



Product Features and Main Functions

Door frame: High-quality aluminum alloy profile;
Normal colors: black and white;
Customized colors: silver grey, etc.
Door panel: white anti-ultraviolet composite sandwich panel (other colors can be customized).
Glass: Frosted tempered glass or UV - resistant acrylic sheet is available.
Aluminum mesh: High strength aluminum mesh.
Gauze curtain: High strength glass fiber curtain.
Door lock: safety certified single point lock. Other locks can also be customized.
Main function: The door has opening, closing, locking, ventilation, light transmission, mosquito proof, sound insulation, heat insulation and good waterproof performance. Light structure , easy to install and use, firm and durable, various models.
Optional: Door stopper.
(Optional parts must be ordered separately)
Door stopper :



Specification parameters

Specifications can be customized according to user requirements.

Main applications

Applicable to RV and Horse trailer





Special vehicle windows

Product pictures

Large Bus window



Expressway toll booth window



Medium-sized Bus window



Special machinery



Sightseeing bus column



Small police car frame



Electric vehicle Door, window



Specification parameters
Customize products according to your needs

企业资质Enterprise qualification



企业质量方针 Enterprise quality policy

客户至上，奋斗为基
Customer first, strive for the base
质量为本，开心共赢
Quality - oriented, win-win cooperation.

企业愿景 Enterprise vision

匠心成就您的美好生活
Focus on achieving your better life

企业使命 Corporate mission

至诚至信，合作共赢
Sincerity to letter, win-win
cooperation

企业核心价值观 Company Core Values

务实奋进，以人为本
Pragmatic forge ahead, people-oriented
开拓创新，客户为先
pioneering and innovative, customer first.



TONGFA

泰州市同发科技有限公司

Taizhou Tongfa Technology Co., Ltd

地址：江苏省泰州市海陵区鲍徐路2号

Address: No. 2, Baoxu Road, Hailing District, Taizhou, Jiangsu Province

电话：0523-86848149


Tel：0523-86848149

手机：18052677777

Phone：18052677777



网址：www.tz-tongfa.com

Web：www.tz-tongfa.com



关注抖音，了解更多

Pay attention to Tiktok and learn more



扫一扫，添加微信

Scan to add WeChat